

G3VM-21LR

MOS FET Relays

World's Smallest* SSOP Package MOS FET Relays with Low Output Capacitance and ON Resistance ($C \times R = 5 \text{ pF} \cdot \Omega$) in a 20-V Load Voltage Model.

• Output capacitance of 1 pF (typical) allows high-frequency applications.

* As of March 2011 Survey by OMRON





Note: The actual product is marked differently from the image shown here.

RoHS compliant

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Data loggers

Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.

List of Models

| Package type | Contact form | Terminals | Load voltage (peak value) * | Model | Minimum package quantity |
|--------------|--------------|----------------------------|-----------------------------|------------------|--------------------------|
| | | | | | Number per tape and reel |
| SSOP4 | 1a (SPST-NO) | Surface-mounting Terminals | 20 V | G3VM-21LR | - |
| | | | | G3VM-21LR (TR05) | 500 |
| | | | | G3VM-21LR (TR10) | 1,000 |
| | | | | G3VM-21LR (TR) | 1,500 |

Note: Ask your OMRON representative for orders under 1,500 pcs, 1,000 pcs, or 500 pcs. We can supply products with the tape already cut.

Tape-cut SSOPs are packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


| Item | Symbol | Rating | Unit | Measurement conditions | |
|---|--------------------------------------|-------------------------------|------------------|------------------------|-------------------------------|
| Input | LED forward current | I_F | 50 | mA | |
| | LED forward current reduction rate | $\Delta I_F / ^\circ\text{C}$ | -0.5 | mA/ $^\circ\text{C}$ | $T_a \geq 25^\circ\text{C}$ |
| | LED reverse voltage | V_R | 5 | V | |
| Output | Connection temperature | T_J | 125 | $^\circ\text{C}$ | |
| | Load voltage (AC peak/DC) | V_{OFF} | 20 | V | |
| | Continuous load current (AC peak/DC) | I_o | 160 | mA | |
| | ON current reduction rate | $\Delta I_o / ^\circ\text{C}$ | -1.6 | mA/ $^\circ\text{C}$ | $T_a \geq 25^\circ\text{C}$ |
| Connection temperature | T_J | 125 | $^\circ\text{C}$ | | |
| Dielectric strength between I/O (See note 1.) | | V_{I-O} | 1500 | V_{rms} | AC for 1 min |
| Ambient operating temperature | | T_a | -20 to +85 | $^\circ\text{C}$ | With no icing or condensation |
| Ambient storage temperature | | T_{stg} | -40 to +125 | $^\circ\text{C}$ | With no icing or condensation |
| Soldering temperature | | - | 260 | $^\circ\text{C}$ | 10 s |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics ($T_a = 25^\circ\text{C}$)

| Item | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions | |
|---|--|------------|---------|---------|------|------------------------|---|
| Input | LED forward voltage | V_F | 1.0 | 1.15 | 1.3 | V | $I_F = 10 \text{ mA}$ |
| | Reverse current | I_R | - | - | 10 | μA | $V_R = 5 \text{ V}$ |
| | Capacity between terminals | C_T | - | 15 | - | pF | $V = 0, f = 1 \text{ MHz}$ |
| | Trigger LED forward current | I_{FT} | - | - | 4 | mA | $I_o = 100 \text{ mA}$ |
| Output | Maximum resistance with output ON | R_{ON} | - | 5 | 8 | Ω | $I_F = 5 \text{ mA}, I_o = 160 \text{ mA}, t = 10 \text{ ms}$ |
| | Current leakage when the relay is open | I_{LEAK} | - | - | 1.0 | nA | $V_{OFF} = 20 \text{ V}, T_a = 50^\circ\text{C}$ |
| | Capacity between terminals | C_{OFF} | - | 1 | 2.5 | pF | $V = 0, f = 100 \text{ MHz}, t < 1 \text{ s}$ |
| | Capacity between I/O terminals | C_{I-O} | - | 0.8 | - | pF | $f = 1 \text{ MHz}, V_s = 0 \text{ V}$ |
| Insulation resistance between I/O terminals | | R_{I-O} | 1000 | - | - | $\text{M}\Omega$ | $V_{I-O} = 500 \text{ VDC}, \text{RoH} \leq 60\%$ |
| Turn-ON time | | t_{ON} | - | 0.06 | 0.5 | ms | $I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 10 \text{ V}$ (See note 2.) |
| Turn-OFF time | | t_{OFF} | - | 0.12 | 0.5 | ms | |

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item | Symbol | Minimum | Typical | Maximum | Unit |
|--------------------------------------|-----------------|---------|---------|---------|------|
| Load voltage (AC peak/DC) | V _{DD} | - | - | 20 | V |
| Operating LED forward current | I _F | 10 | - | 30 | mA |
| Continuous load current (AC peak/DC) | I _O | - | - | 160 | mA |
| Ambient operating temperature | T _a | 25 | - | 60 | °C |

Engineering Data


LED forward current vs. Ambient temperature

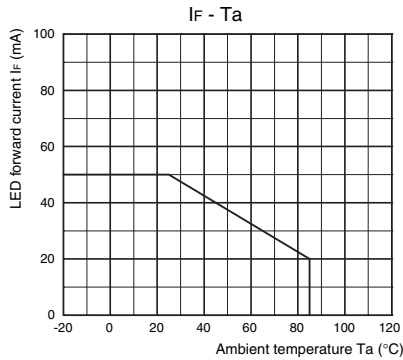


Continuous load current vs. Ambient temperature

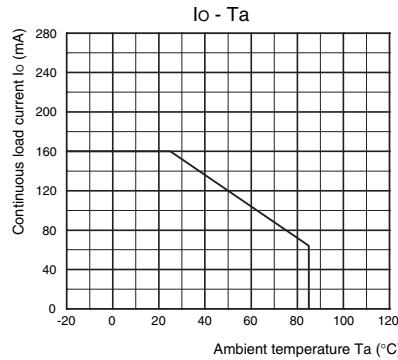


LED forward current vs. LED forward voltage

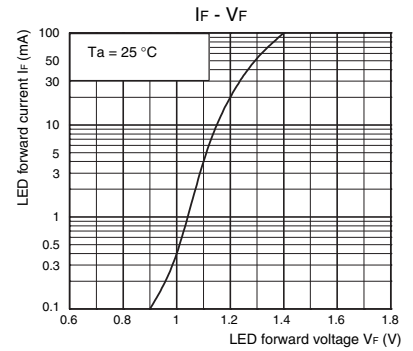


Continuous load current vs. On-state voltage

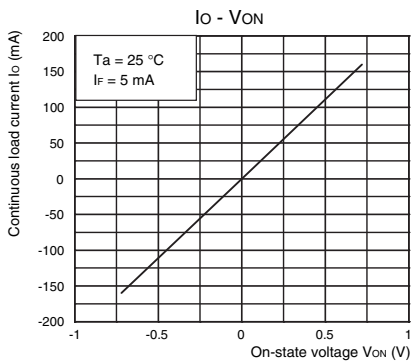


On-state resistance vs. Ambient temperature

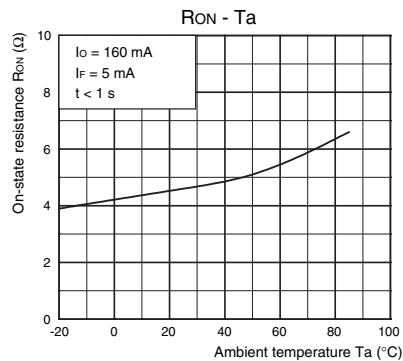


Trigger LED forward current vs. Ambient temperature

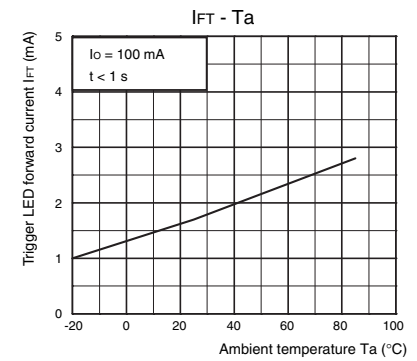


Turn ON, Turn OFF time vs. LED forward current

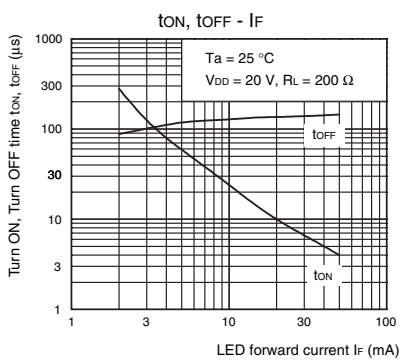


Turn ON, Turn OFF time vs. Ambient temperature

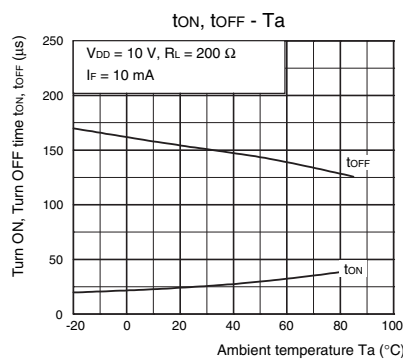

Current leakage vs. Load voltage

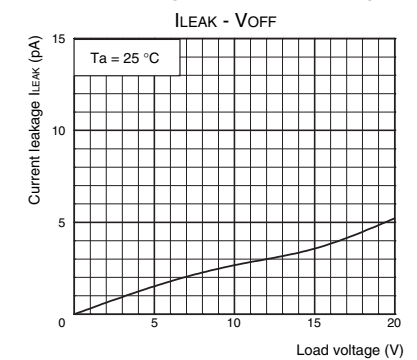

Output terminal capacitance vs. Load voltage

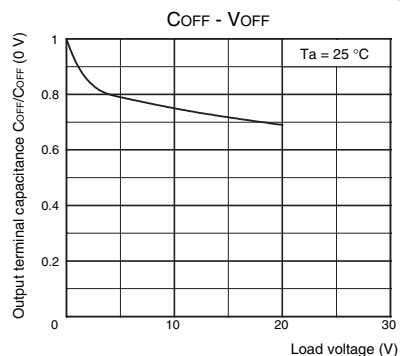


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance


SSOP (Shrink Small Outline Package)
SSOP4

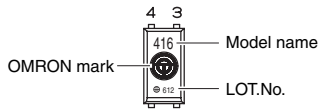

Note: The actual product is marked differently from the image shown here.


■ Dimensions

(Unit: mm)




Surface-mounting Terminals

Weight: 0.03 g



Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331