




## Typical Applications

Prescaler for DC to 18 GHz PLL Applications:

- Point-to-Point / Multi-Point Radios
- VSAT Radios
- Fiber Optic
- Test Equipment
- Military

## Functional Diagram

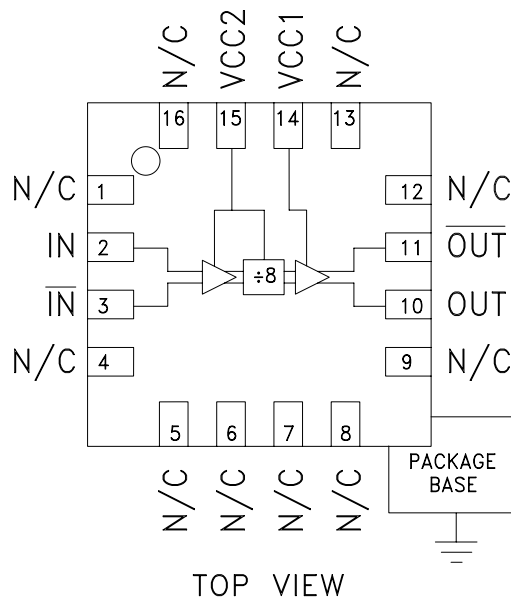

## Features

- Ultra Low SSB Phase Noise: -150 dBc/Hz
- Very Wide Bandwidth
- Output Power: -4 dBm
- Single DC Supply: +5V
- 16 Lead 3x3mm QFN Package: 9 mm<sup>2</sup>

## General Description

The HMC494LP3 & HMC494LP3E are low noise Divide-by-8 Static Dividers utilizing InGaP GaAs HBT technology packaged in leadless 3x3 mm QFN surface mount plastic packages. This device operates from DC (with a square wave input) to 18 GHz input frequency from a single +5V DC supply. The low additive SSB phase noise of -150 dBc/Hz at 100 kHz offset helps the user maintain excellent system noise performance.

## Electrical Specifications, $T_A = +25^\circ \text{C}$ , 50 Ohm System, $V_{CC} = +5V$


| Parameter                              | Conditions                            | Min. | Typ. | Max. | Units  |
|----------------------------------------|---------------------------------------|------|------|------|--------|
| Maximum Input Frequency                |                                       | 18   | 19   |      | GHz    |
| Minimum Input Frequency                | Sine Wave Input. [1]                  |      | 0.2  | 0.5  | GHz    |
| Input Power Range                      | $F_{in} = 2$ to 12 GHz                | -20  | -15  | +10  | dBm    |
|                                        | $F_{in} = 12$ to 16 GHz               | -20  | -15  | +3   | dBm    |
|                                        | $F_{in} = 16$ to 18 GHz               | -15  | -10  | 0    | dBm    |
| Output Power                           | $F_{in} = 0.5$ to 18 GHz              | -7   | -4   |      | dBm    |
| Reverse Leakage                        | Both RF Outputs Terminated            |      | 55   |      | dB     |
| SSB Phase Noise (100 kHz offset)       | $P_{in} = 0$ dBm, $F_{in} = 6$ GHz    |      | -150 |      | dBc/Hz |
| Output Transition Time                 | $P_{in} = 0$ dBm, $F_{out} = 882$ MHz |      | 100  |      | ps     |
| Supply Current ( $I_{cc1} + I_{cc2}$ ) |                                       |      | 103  |      | mA     |

1. Divider will operate down to DC for square-wave input signal


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


**Input Sensitivity Window,  $T = 25\text{ }^{\circ}\text{C}$**

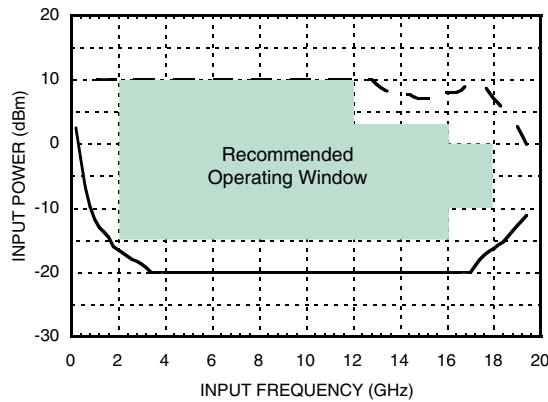


**Input Sensitivity Window vs. Temperature**

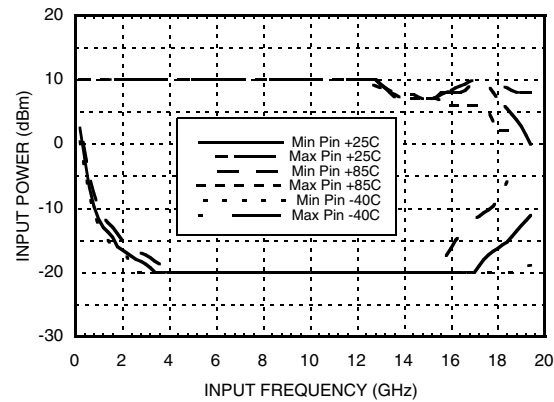


**Output Power vs. Temperature**

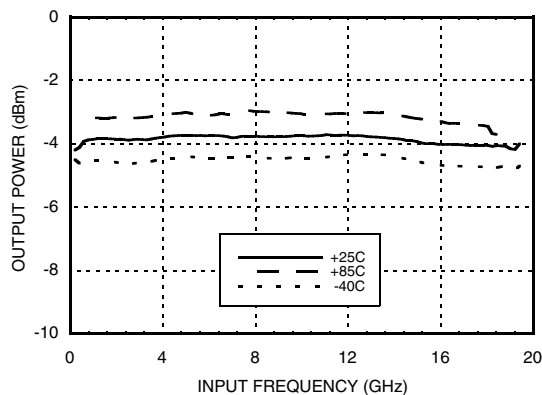


**SSB Phase Noise Performance,  
 $P_{in} = 0\text{ dBm}$ ,  $T = 25\text{ }^{\circ}\text{C}$**

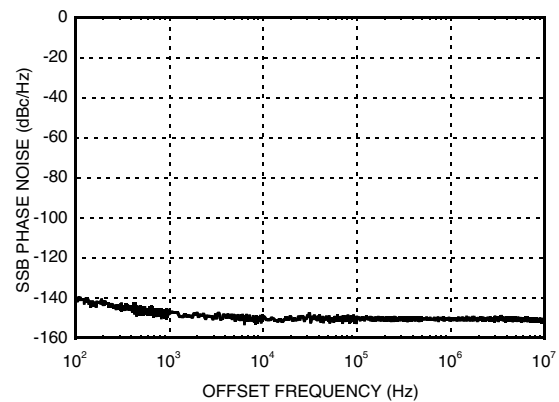

**Output Harmonic Content,  
 $P_{in} = 0\text{ dBm}$ ,  $T = 25\text{ }^{\circ}\text{C}$**

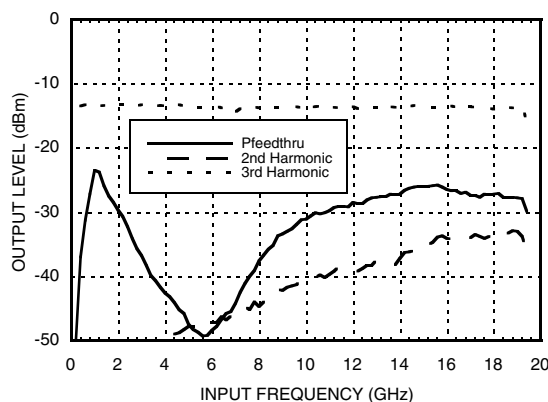


**Reverse Leakage,  $P_{in} = 0\text{ dBm}$ ,  $T = 25\text{ }^{\circ}\text{C}$**

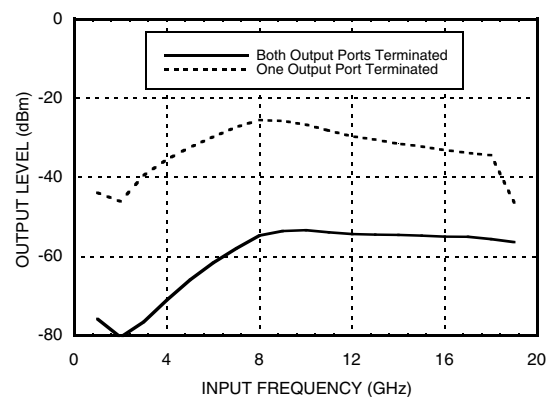

**SMT GaAs HBT MMIC  
DIVIDE-BY-8, DC - 18 GHz**


**Output Voltage Waveform,**  
**Pin= 0 dBm, Fout= 882 MHz, T= 25 °C**

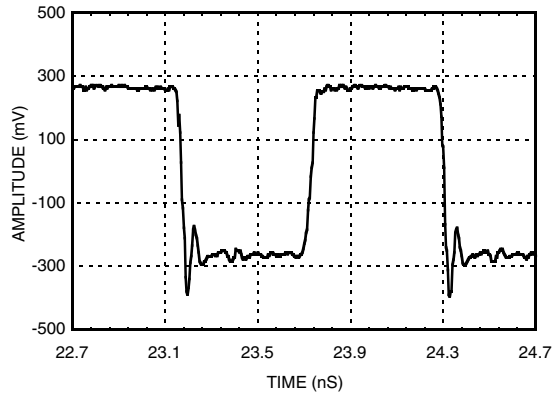

**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**


**Absolute Maximum Ratings**

|                                                                             |                |
|-----------------------------------------------------------------------------|----------------|
| RF Input (Vcc = +5V)                                                        | +13 dBm        |
| Supply Voltage (Vcc1, Vcc2)                                                 | +5.5V          |
| Channel Temperature (Tc)                                                    | 135 °C         |
| Continuous P <sub>diss</sub> (T = 85 °C)<br>(derate 11.9 mW/°C above 85 °C) | 593 mW         |
| Thermal Resistance (R <sub>TH</sub> )<br>(junction to ground paddle)        | 84 °C/W        |
| Storage Temperature                                                         | -65 to +150 °C |
| Operating Temperature                                                       | -40 to +85 °C  |
| ESD Sensitivity (HBM)                                                       | Class 1A       |

**Typical Supply Current vs. Vcc**

| Vcc1, Vcc2 (V) | Icc (mA) |
|----------------|----------|
| 4.75           | 90       |
| 5.0            | 103      |
| 5.25           | 115      |

Note: Divider will operate over full voltage range shown above

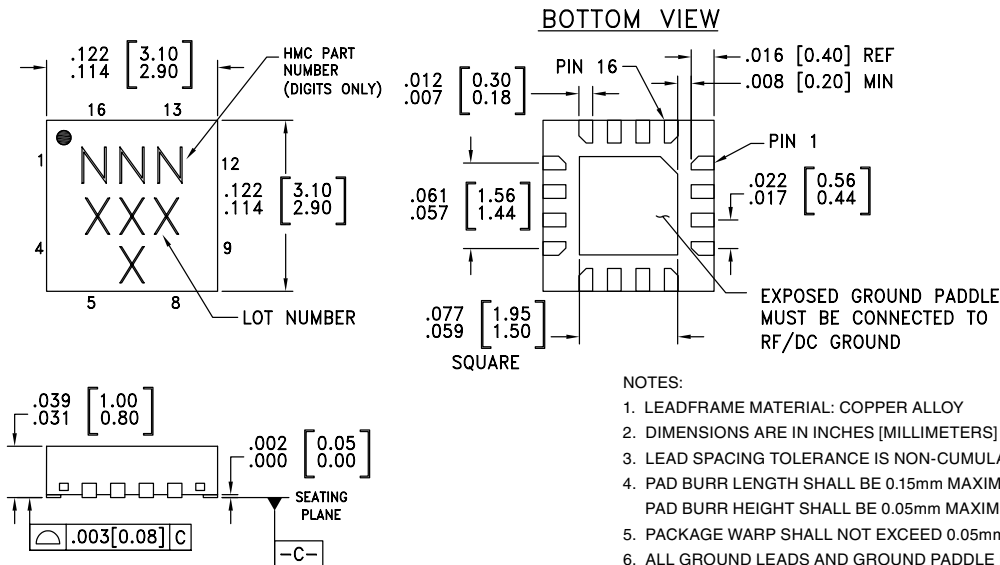**Outline Drawing**

**Package Information**

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC494LP3   | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | 494<br>XXXX                    |
| HMC494LP3E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | 494<br>XXXX                    |

[1] Max peak reflow temperature of 235 °C





[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc.,  
One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D

## Pin Description

| Pin Number            | Function                | Description                                                                                                | Interface Schematic                                                                   |
|-----------------------|-------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1, 4-9,<br>12, 13, 16 | N/C                     | No connection.                                                                                             |                                                                                       |
| 2                     | IN                      | RF Input must be DC blocked.                                                                               |    |
| 3                     | $\overline{\text{IN}}$  | RF Input 180° out of phase with pin 2 for differential operation.<br>AC ground for single ended operation. |    |
| 10                    | OUT                     | Divided Output.                                                                                            |  |
| 11                    | $\overline{\text{OUT}}$ | Divided output 180° out of phase with pin 10.                                                              |  |
| 14, 15                | Vcc1, Vcc2              | Supply voltage 5V ± 0.25V. Connect both pins to +5V supply.                                                |                                                                                       |
|                       | GND                     | Ground: Backside of package has exposed metal ground slug which must be connected to RF/DC ground.         |  |

**Evaluation PCB**

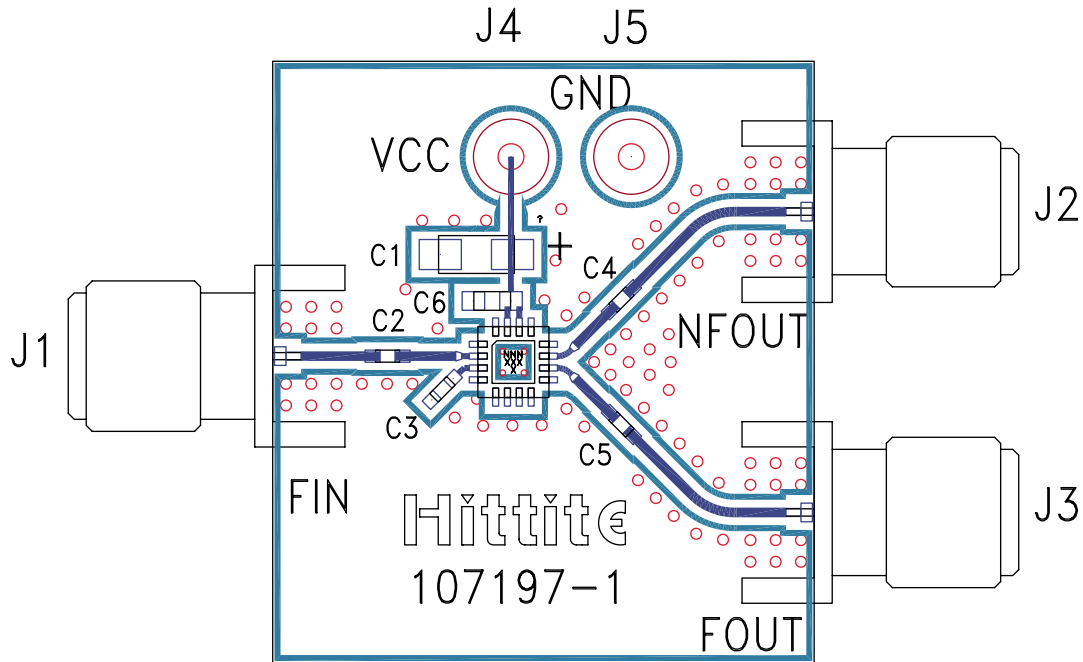

**List of Materials for Evaluation PCB 107384 [1]**


| Item    | Description                        |
|---------|------------------------------------|
| J1 - J3 | PCB Mount SMA RF Connector         |
| J4, J5  | DC Pin                             |
| C2 - C5 | 100 pF Capacitor, 0402 Pkg.        |
| C6      | 1000 pF Capacitor, 0603 Pkg.       |
| C1      | 2.2 uF Tantalum Capacitor          |
| U1      | HMC494LP3 / HMC494LP3E Divide-by-2 |
| PCB [2] | 107197 Eval Board                  |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and backside ground slug should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request. This evaluation board is designed for single ended input testing. J2 and J3 provide differential output signals.

**Application Circuit**

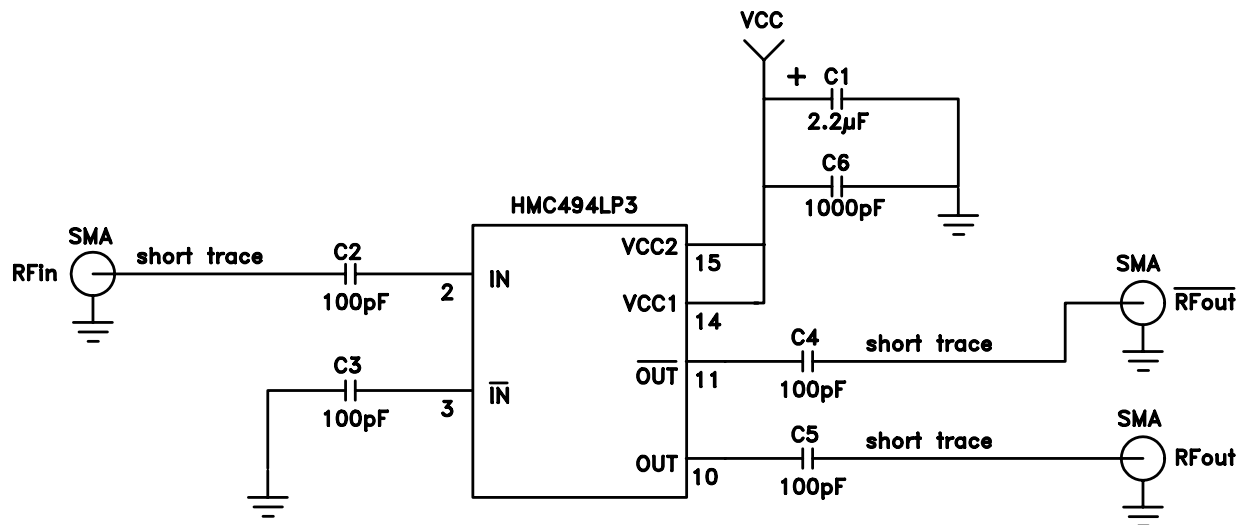



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331