

**S5U1S65K01H4100**  
**Camera Board**  
**Technical Manual**

## NOTICE


---

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.


All other product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

## Configuration of product number

### ●DEVICES

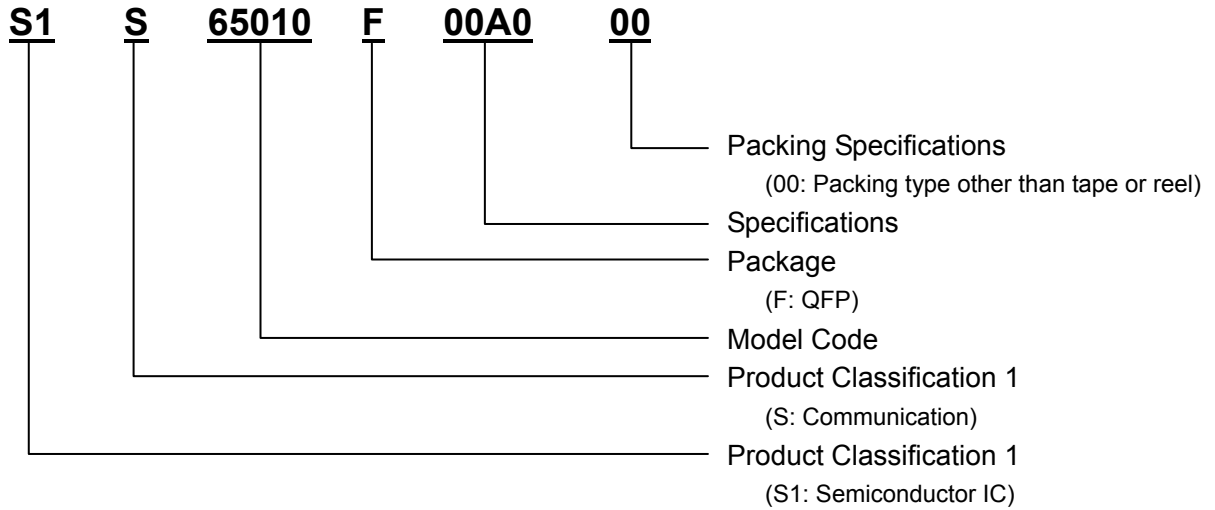

### ●Evaluation Board

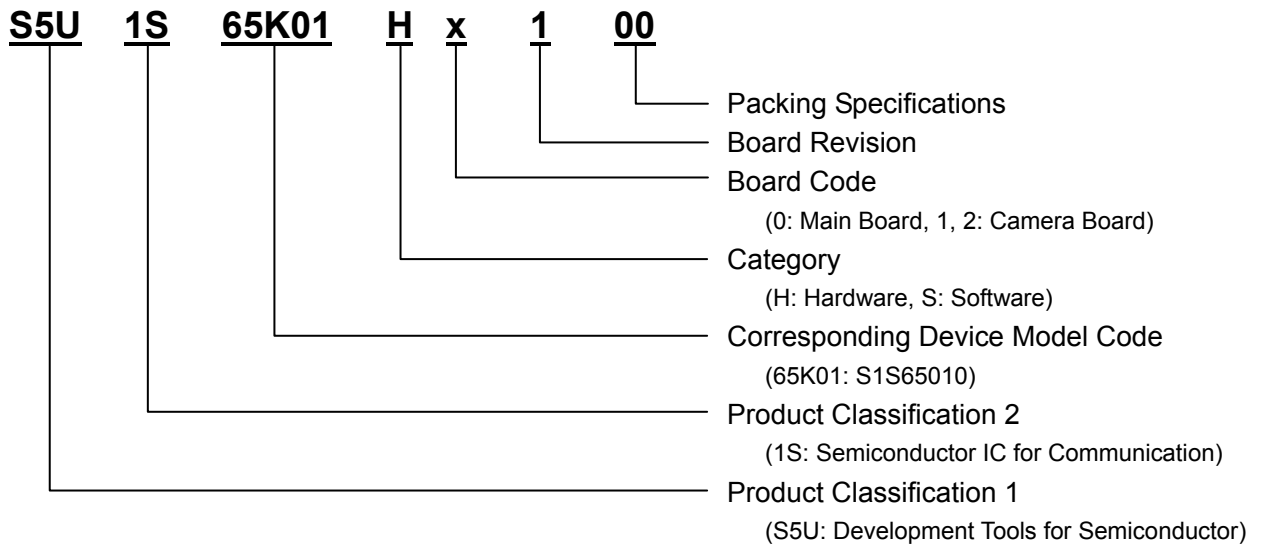

## Table of Contents

<b>1. OVERVIEW</b> .....	<b>1</b>
<b>2. COMPONENTS</b> .....	<b>1</b>
2.1 Main Parts .....	1
2.2 Block Diagram .....	1
<b>3. MECHANICAL SPECIFICATIONS</b> .....	<b>2</b>
<b>4. EXTERNAL PINS</b> .....	<b>3</b>
<b>4.1 Interface Connectors</b> .....	<b>3</b>
4.1.1 Main Board Interfaces .....	3
4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031).....	6
4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG) .....	6
4.1.4 Camera Module Connectors (CN1 CN2, and CN5).....	6
<b>5. FUNCTIONAL DESCRIPTION</b> .....	<b>7</b>
5.1 GPIOB DIP Switches (SW1) .....	7
5.2 UART DIP Switches (SW2).....	8
5.3 AUDIO CODEC DIP Switches (SW3).....	9
5.4 Camera's I <sup>2</sup> C address DIP Switches (SW4) .....	10
5.5 AUDIO CODEC clock input (J3).....	10
<b>6. PARTS LISTS</b> .....	<b>11</b>
<b>REVISION HISTORY</b> .....	<b>12</b>

## 1. OVERVIEW

This product is an evaluation board used when it connects with the S65K series evaluation board and the network camera and the drive recorder are constructed.

It connects with the board that mounts SEIKO EPSON S1S65010 or S2S65A00 and it uses it.

## 2. COMPONENTS

### 2.1 Main Parts

CAMERA	CMOS Camera Module (TOKO TMV1320)
Audio CODEC	Monaural CODEC (ASAHIKASEI AK4631)
Main Board I/F	Preparation of the connector of 40/16pin for S65K series evaluation board joint
Audio I/F	Speaker, MIC, Line Input, Line Output

### 2.2 Block Diagram

The following figure gives block diagram for camera board. This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

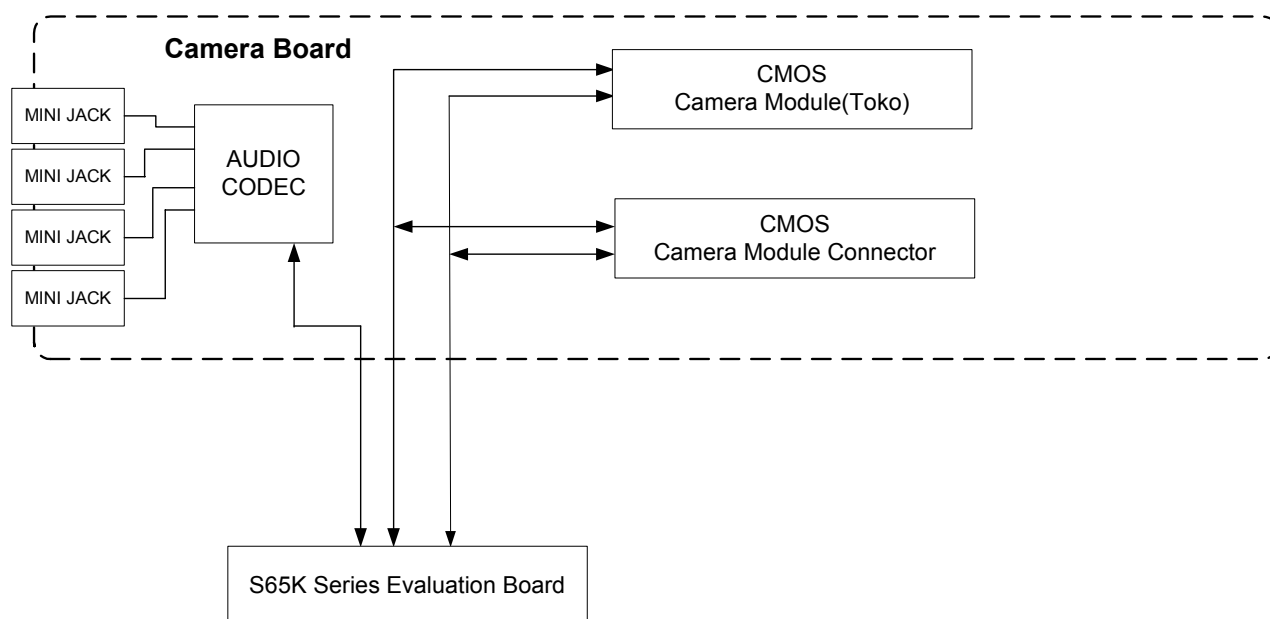


Fig.2.1 Block Diagram

### 3. MECHANICAL SPECIFICATIONS

### 3. MECHANICAL SPECIFICATIONS

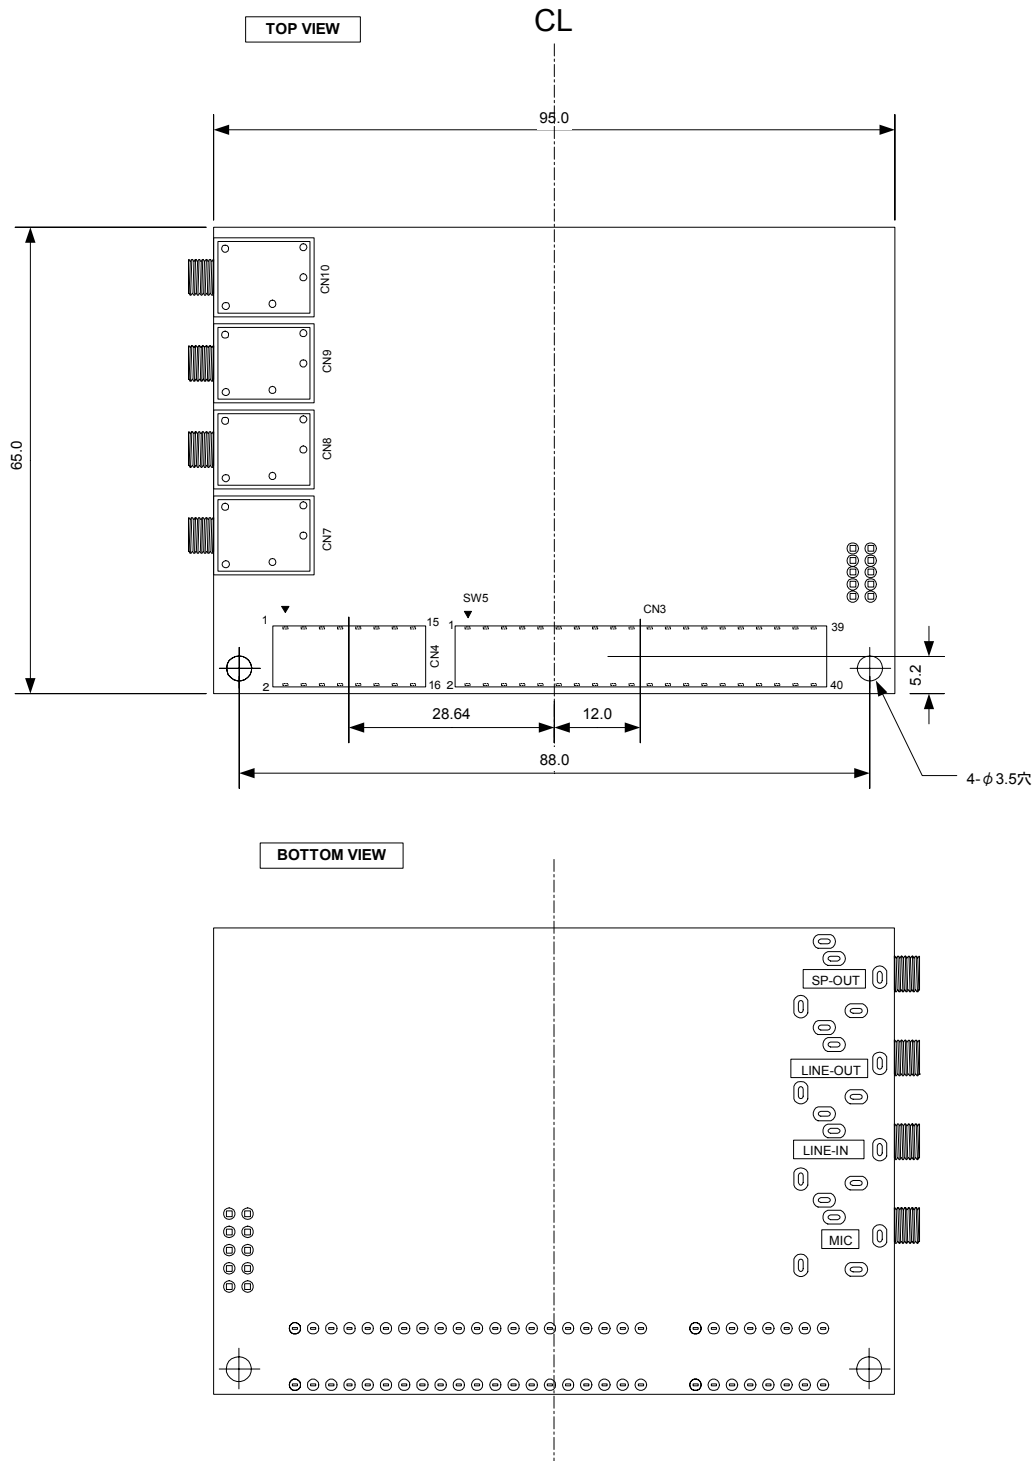


Fig.3.1 Camera Board Dimensions

## 4. EXTERNAL PINS

### 4.1 Interface Connectors

The following Figure shows the locations of the external interface connectors on the camera board. The Tables in the following four subsections list their pin assignments.

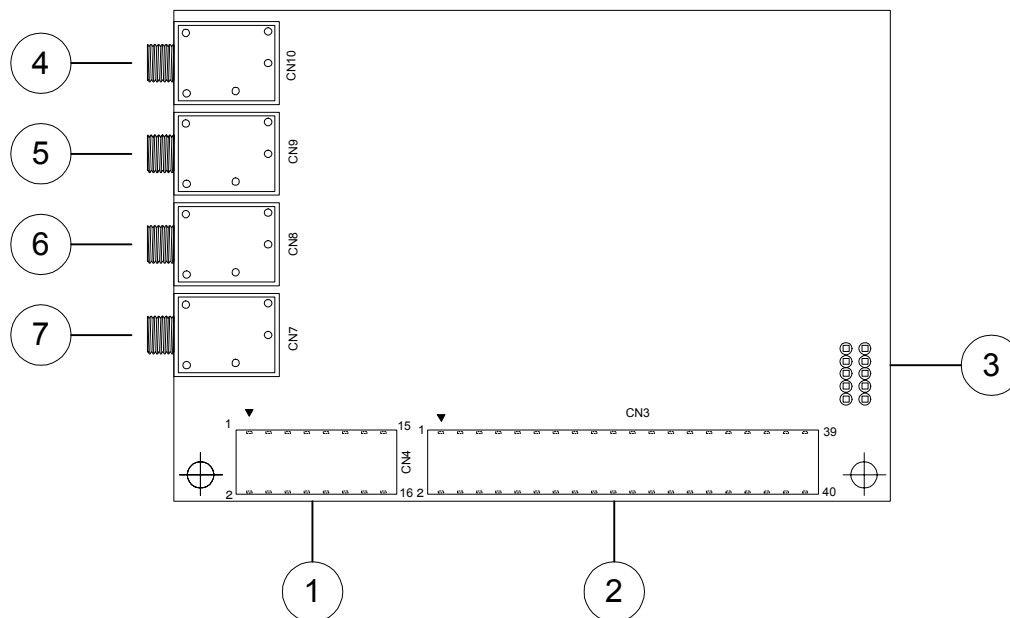


Fig.4.1 Camera Board Interface Connector Layout

#### 4.1.1 Main Board Interfaces

① 5V, Reset (CN3 : HIF3H-16DB-2.54S)

① in Fig.4.1

Pin Number	Function	Pin Number	Function
1	5V	2	5V
3	NC	4	NC
5	NC	6	NC
7	NC	8	NC
9	NC	10	NC
11	NC	12	NC
13	RESET#	14	GND
15	GND	16	GND

## 4. EXTERNAL PINS

---

② Camera interface and expansion connector (CN1: HIF3H-40DB-2.54DS)

② in Fig.4.1

②-1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	GPIOA0	22	GPIOA1
23	GPIOA2 (TXD1/SPI_SS)	24	GPIOA3 (RXD1/SPI_SCLK)
25	GPIOA4 (SPI_MISO)	26	GPIOA5 (SPI_MOSI)
27	GPIOA6	28	GPIOA7
29	GPIOB0 (I2S0_WS)	30	GPIOB1 (I2S0_SCK)
31	GPIOB2 (I2S0_SD)	32	GPIOB3 (I2S1_SD)
33	GPIOB4 (Timer1out)	34	GPIOB5
35	GPIOB6	36	GPIOB7
37	GIOD0	38	GIOD1
39	GND	40	GND



②-2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	NC	22	NC
23	GPIOC4 (TXD3/SPI_SS)	24	GPIOC5 (RXD3/SPI_SCLK)
25	NC	26	SPI_MOSI
27	NC	28	NC
29	GPIOB0 (I2S0_WS)	30	GPIOB1 (I2S_SCK)
31	GPIOB2 (I2S_SDO)	32	GPIOB3 (I2S_SDI)
33	GPIOB4 (TimerA0out)	34	NC
35	NC	36	NC
37	NC	38	NC
39	GND	40	GND

②-3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function	Pin Number	Function
1	GND	2	GND
3	CAMDATA0	4	CAMDATA1
5	CAMDATA2	6	CAMDATA3
7	CAMDATA4	8	CAMDATA5
9	CAMDATA6	10	CAMDATA7
11	CMCLKOUT	12	CMCLKIN
13	CMVREF	14	CMHREF
15	CAMVDD	16	CAMVDD
17	I2C_SDA	18	I2C_SCL
19	3.3V	20	3.3V
21	NC	22	NC
23	NC	24	NC
25	NC	26	NC
27	NC	28	NC
29	NC	30	NC
31	NC	32	NC
33	NC	34	NC
35	NC	36	NC
37	NC	38	NC
39	GND	40	GND

## 4. EXTERNAL PINS

---

### 4.1.2 Serial (RS232-C) Interface (CN6: XG8W-1031)

③ in Fig.4.1

Pin Number	Function	Pin Number	Function
1	NC	2	RXD
3	TXD	4	NC
5	GND	6	NC
7	NC	8	NC
9	NC	10	NC

### 4.1.3 Audio Interface Connectors (CN7 to CN10: A2PA-3PGG)

These are for a microphone, a speaker, and line I/O.

④ to ⑦ in Fig.4.1

Connector	Function	Note
CN7	Microphone input	⑦
CN8	Line input	⑥
CN9	Line output	⑤
CN10	Speaker output	④

### 4.1.4 Camera Module Connectors (CN1 CN2, and CN5)

This board provides three (mutually exclusive) connectors for connecting a CMOS camera module.

Connector	Function	Product Number
CN1	TMV1320	086262022340829+ (Kyocera-elco)
CN2	TMV1303	AXK730127G (MATSUSHITA)
CN5	General purpose	8526-4500PL (3M)

## 5. FUNCTIONAL DESCRIPTION

Fig.5.1 show component locations on the board. The following nine subsections describe their functions.

- Please do not turn on SW1 and SW3 together.
- Please do not turn on SW1[2:1] and SW2 together.

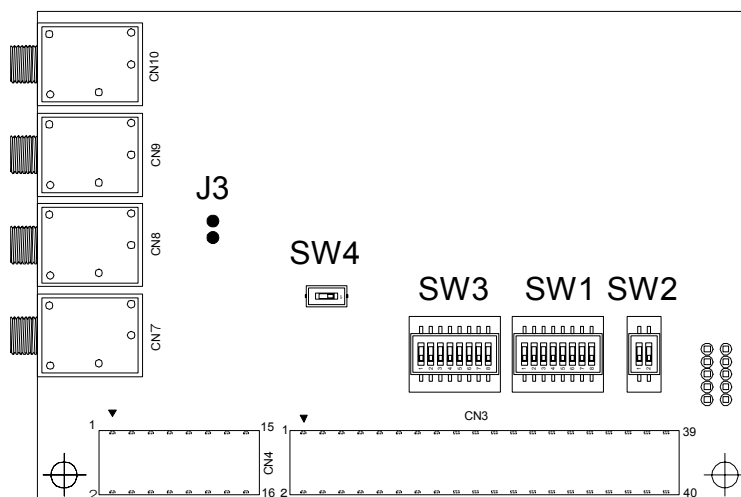


Fig.5.1 Camera Board (Top View)

### 5.1 GPIOB DIP Switches (SW1)

It is possible to control the LED by GPIOB from S1S65010, S2S65A00 evaluation board. It is the switch that joints the LED and GPIOB.

Table 5.1 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Abbreviation	Function		Notes
		0 (OFF)	1 (ON)	
1	LED7	No connecting	GPIOB7	
2	LED6	No connecting	GPIOB6	
3	LED5	No connecting	GPIOB5	
4	LED4	No connecting	GPIOB4	
5	LED3	No connecting	GPIOB3	
6	LED2	No connecting	GPIOB2	
7	LED1	No connecting	GPIOB1	
8	LED0	No connecting	GPIOB0	

## 5. FUNCTIONAL DESCRIPTION

Table 5.2 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Abbreviation	Function		Note
		0 (OFF)	1 (ON)	
1	LED7	No Connecting		
2	LED6	No Connecting		
3	LED5	No Connecting		
4	LED4	No Connecting	GPIOB4	
5	LED3	No Connecting	GPIOB3	
6	LED2	No Connecting	GPIOB2	
7	LED1	No Connecting	GPIOB1	
8	LED0	No Connecting	GPIOB0	

Table 5.3 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Abbreviation	Function		Note
		0 (OFF)	1 (ON)	
1	LED7	No Connecting		
2	LED6			
3	LED5			
4	LED4			
5	LED3			
6	LED2			
7	LED1			
8	LED0			

It is not possible the control of the LED on the camera board from CN8 of the S2S65A00 evaluation board.

### 5.2 UART DIP Switches (SW2)

It is the switch that joints RS232C IC on the camera board and UART of the S1S65010/S2S6500 evaluation board.

Table 5.4 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	UART Lite TXD	
2	No Connecting	UART Lite RXD	

Table 5.5 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	UART TXD3	
2	No Connecting	UART RXD3	

Table 5.6 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting		
2			

### 5.3 AUDIO CODEC DIP Switches (SW3)

It is the switch that joints Audio CODEC IC on the camera board and I2S,SPI of the S1S65010/S2S6500 evaluation board.

Table 5.7 S1S65010 Evaluation Board (S5U1S65K01H0x00) case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	SPI_SS	
2	No Connecting	SPI_SCLK	
3	No Connecting	SPI_MOSI	
4	No Connecting	TIMER1OUT	
5	No Connecting	I2S0_SD	
6	No Connecting	I2S1_SD	
7	No Connecting	I2S0_WS	
8	No Connecting	I2S0_SCK	

Table 5.8 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN7 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting	SPI_SS	
2	No Connecting	SPI_SCLK	
3	No Connecting	SPI_MOSI	
4	No Connecting	TIMERA0OUT	
5	No Connecting	I2S_SDO	
6	No Connecting	I2S_SDI	
7	No Connecting	I2S_WS	
8	No Connecting	I2S_SCLK	

Table 5.9 S2S65A00 Evaluation Board (S5U2S65A00H0x00) CN8 case of joint

Pin Number	Function		Note
	0 (OFF)	1 (ON)	
1	No Connecting		
2			
3			
4			
5			
6			
7			
8			

## 5. FUNCTIONAL DESCRIPTION

---

### 5.4 Camera's I<sup>2</sup>C address DIP Switches (SW4)

It is the switch of the I<sup>2</sup>C address binding of a camera module. Sample software is using address 0x90.  
ON:0x90  
OFF:0xB8

### 5.5 AUDIO CODEC clock input (J3)

J3 selects of the clock source of AUDIO CODEC AK4631. Sample software is using Timer Out of the main board for the clock. In the case that the crystal oscillator on the board is used it does J3 the short and please make bit4 of SW3 the open. The frequency of the crystal oscillator is 12.288MHz.

## 6. PARTS LISTS

The following Table lists the major parts on the camera board—that is, all parts except resistors and capacitors.

Table 6.1 Camera Board Parts

PARTS NO	PARTS NAME	STANDARD		QTY
	PCB			1
U1	IC	TC74VHC05FT	TOHSHIBA	1
U2		ADM3222ARUZ	Analog Devices	1
U3		AK4631VN	Asahi-Kasei	1
SW1,SW3	SWITCH	CHS-08B	COPAL	2
SW2		CHS-02B	COPAL	1
SW4		CHS-01B	COPAL	1
CN1	CONNECTOR	086262022340829+	KYOCERA-elco	1
CN2		AXK730127G	Matsushita	1
CN3		HIF3H-40DB-2.54DS	HIROSE	1
CN4		HIF3H-16DB-2.54DS	HIROSE	1
CN7, CN8, CN9, CN10	Mini JACK	A2PA-3PGG		4
FL1	FILTER	NFM18PC105R0J3	MURATA	1
LED1, LED2, LED3, LED4, LED5, LED6, LED7, LED8	LED	SML-310MTT86	ROHM	8
X1	OSC	SG-310SCF 12.288MHz	EPSON TOYOCOM	1

## REVISION HISTORY

---

### REVISION HISTORY

Rev	Date	Description	Person
1.0	2007/07/18	First Edition	T.Suzuki



### AMERICA

#### EPSON ELECTRONICS AMERICA, INC.

##### HEADQUARTERS

2580 Orchard Parkway  
San Jose , CA 95131, USA  
Phone: +1-800-228-3964      FAX: +1-408-922-0238

##### SALES OFFICES

###### Northeast

301 Edgewater Place, Suite 210  
Wakefield, MA 01880, U.S.A.  
Phone: +1-800-922-7667      FAX: +1-781-246-5443

### EUROPE

#### EPSON EUROPE ELECTRONICS GmbH

##### HEADQUARTERS

Riesstrasse 15  
80992 Munich, GERMANY  
Phone: +49-89-14005-0      FAX: +49-89-14005-110

### ASIA

#### EPSON (CHINA) CO., LTD.

23F, Beijing Silver Tower 2# North RD DongSanHuan  
ChaoYang District, Beijing, CHINA  
Phone: +86-10-6410-6655      FAX: +86-10-6410-7320

##### SHANGHAI BRANCH

7F, High-Tech Bldg., 900, Yishan Road,  
Shanghai 200233, CHINA  
Phone: +86-21-5423-5522      FAX: +86-21-5423-5512

##### EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road  
Wanchai, Hong Kong  
Phone: +852-2585-4600      FAX: +852-2827-4346  
Telex: 65542 EPSCO HX

##### EPSON Electronic Technology Development (Shenzhen) LTD.

12/F, Dawning Mansion, Keji South 12th Road,  
Hi- Tech Park, Shenzhen  
Phone: +86-755-2699-3828      FAX: +86-755-2699-3838

##### EPSON TAIWAN TECHNOLOGY & TRADING LTD.

14F, No. 7, Song Ren Road,  
Taipei 110  
Phone: +886-2-8786-6688      FAX: +886-2-8786-6660

##### EPSON SINGAPORE PTE., LTD.

1 HarbourFront Place,  
#03-02 HarbourFront Tower One, Singapore 098633  
Phone: +65-6586-5500      FAX: +65-6271-3182

##### SEIKO EPSON CORPORATION

###### KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong  
Youngdeungpo-Ku, Seoul, 150-763, KOREA  
Phone: +82-2-784-6027      FAX: +82-2-767-3677

###### GUMI OFFICE

2F, Grand B/D, 457-4 Songjeong-dong,  
Gumi-City, KOREA  
Phone: +82-54-454-6027      FAX: +82-54-454-6093

---

#### SEIKO EPSON CORPORATION SEMICONDUCTOR OPERATIONS DIVISION

##### IC Sales Dept.

###### IC International Sales Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-42-587-5814      FAX: +81-42-587-5117

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Epson:

[S5U1S65K01H0400](#) [S5U1S65K01H4100](#)



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331