

# BC846, BC847, BC848

## General Purpose Transistors

### NPN Silicon

These transistors are designed for general purpose amplifier applications. They are housed in the SC-70/SOT-323 which is designed for low power surface mount applications.

#### Features

- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

| Rating   | Symbol    | Value             | Unit |
|--|-----------|-------------------|------|
| Collector-Emitter Voltage<br>BC846<br>BC847<br>BC848 | $V_{CEO}$ | 65<br>45<br>30    | V    |
| Collector-Base Voltage<br>BC846<br>BC847<br>BC848    | $V_{CBO}$ | 80<br>50<br>30    | V    |
| Emitter-Base Voltage<br>BC846<br>BC847<br>BC848      | $V_{EBO}$ | 6.0<br>6.0<br>5.0 | V    |
| Collector Current – Continuous                       | $I_C$     | 100               | mAdc |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS



| Characteristic  | Symbol          | Max            | Unit                      |
|---|-----------------|----------------|---------------------------|
| Total Device Dissipation FR-5 Board,<br>(Note 1) $T_A = 25^\circ\text{C}$ | $P_D$           | 200            | mW                        |
| Thermal Resistance,<br>Junction-to-Ambient                                | $R_{\theta JA}$ | 620            | $^\circ\text{C}/\text{W}$ |
| Junction and Storage Temperature  | $T_J, T_{stg}$  | -55 to<br>+150 | $^\circ\text{C}$          |

1. FR-5 = 1.0 x 0.75 x 0.062 in.




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



SC-70/SOT-323  
CASE 419  
STYLE 3

#### MARKING DIAGRAM



XX = Specific Device Code  
M = Month Code  
▪ = Pb-Free Package  
(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 12 of this data sheet.

# BC846, BC847, BC848

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic  |  | Symbol        | Min               | Typ         | Max         | Unit                |
|---|--|---------------|-------------------|-------------|-------------|---------------------|
| <b>OFF CHARACTERISTICS</b>  |  |               |                   |             |             |                     |
| Collector–Emitter Breakdown Voltage<br>( $I_C = 10\text{ mA}$ )   | BC846 Series<br>BC847 Series<br>BC848 Series | $V_{(BR)CEO}$ | 65<br>45<br>30    | –<br>–<br>– | –<br>–<br>– | V                   |
| Collector–Emitter Breakdown Voltage<br>( $I_C = 10\ \mu\text{A}$ , $V_{EB} = 0$ )                                 | BC846 Series<br>BC847 Series<br>BC848 Series | $V_{(BR)CES}$ | 80<br>50<br>30    | –<br>–<br>– | –<br>–<br>– | V                   |
| Collector–Base Breakdown Voltage<br>( $I_C = 10\ \mu\text{A}$ )   | BC846 Series<br>BC847 Series<br>BC848 Series | $V_{(BR)CBO}$ | 80<br>50<br>30    | –<br>–<br>– | –<br>–<br>– | V                   |
| Emitter–Base Breakdown Voltage<br>( $I_E = 1.0\ \mu\text{A}$ )  | BC846 Series<br>BC847 Series<br>BC848 Series | $V_{(BR)EBO}$ | 6.0<br>6.0<br>5.0 | –<br>–<br>– | –<br>–<br>– | V                   |
| Collector Cutoff Current ( $V_{CB} = 30\text{ V}$ )<br><br>( $V_{CB} = 30\text{ V}$ , $T_A = 150^\circ\text{C}$ ) |  | $I_{CBO}$     | –<br>–            | –<br>–      | 15<br>5.0   | nA<br>$\mu\text{A}$ |

## ON CHARACTERISTICS


|  |  |               |             |                  |             |             |
|--|--|---------------|-------------|------------------|-------------|-------------|
| DC Current Gain<br>( $I_C = 10\ \mu\text{A}$ , $V_{CE} = 5.0\text{ V}$ )<br><br>( $I_C = 2.0\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )        | BC846A, BC847A, BC848A<br>BC846B, BC847B, BC848B<br>BC847C, BC848C<br><br>BC846A, BC847A, BC848A<br>BC846B, BC847B, BC848B<br>BC847C, BC848C | $h_{FE}$      | –<br>–<br>– | 90<br>150<br>270 | –<br>–<br>– | –<br>–<br>– |
| Collector–Emitter Saturation Voltage ( $I_C = 10\text{ mA}$ , $I_B = 0.5\text{ mA}$ )<br>( $I_C = 100\text{ mA}$ , $I_B = 5.0\text{ mA}$ ) |  | $V_{CE(sat)}$ | –<br>–      | –<br>–           | 0.25<br>0.6 | V           |
| Base–Emitter Saturation Voltage ( $I_C = 10\text{ mA}$ , $I_B = 0.5\text{ mA}$ )<br>( $I_C = 100\text{ mA}$ , $I_B = 5.0\text{ mA}$ )      |  | $V_{BE(sat)}$ | –<br>–      | 0.7<br>0.9       | –<br>–      | V           |
| Base–Emitter Voltage ( $I_C = 2.0\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )<br>( $I_C = 10\text{ mA}$ , $V_{CE} = 5.0\text{ V}$ )             |  | $V_{BE(on)}$  | 580<br>–    | 660<br>–         | 700<br>770  | mV          |

## SMALL–SIGNAL CHARACTERISTICS


|   |  |           |     |   |     |     |
|---|--|-----------|-----|---|-----|-----|
| Current–Gain – Bandwidth Product<br>( $I_C = 10\text{ mA}$ , $V_{CE} = 5.0\text{ Vdc}$ , $f = 100\text{ MHz}$ )                               |  | $f_T$     | 100 | – | –   | MHz |
| Output Capacitance ( $V_{CB} = 10\text{ V}$ , $f = 1.0\text{ MHz}$ )  |  | $C_{obo}$ | –   | – | 4.5 | pF  |
| Noise Figure ( $I_C = 0.2\text{ mA}$ , $V_{CE} = 5.0\text{ Vdc}$ , $R_S = 2.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ , $BW = 200\text{ Hz}$ ) |  | NF        | –   | – | 10  | dB  |

# BC846, BC847, BC848


## BC846A, BC847A, BC848A

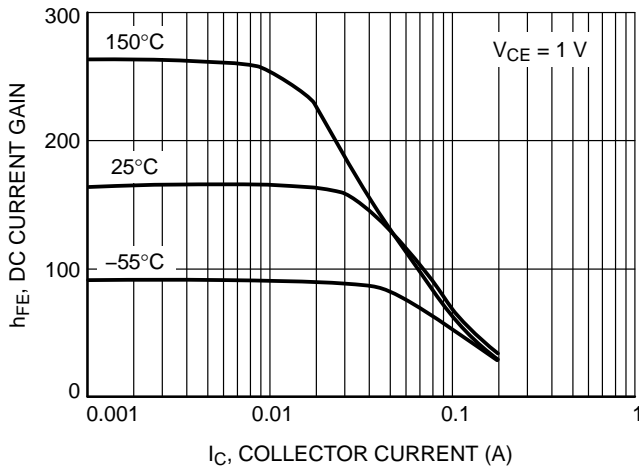


**Figure 1. DC Current Gain vs. Collector Current**

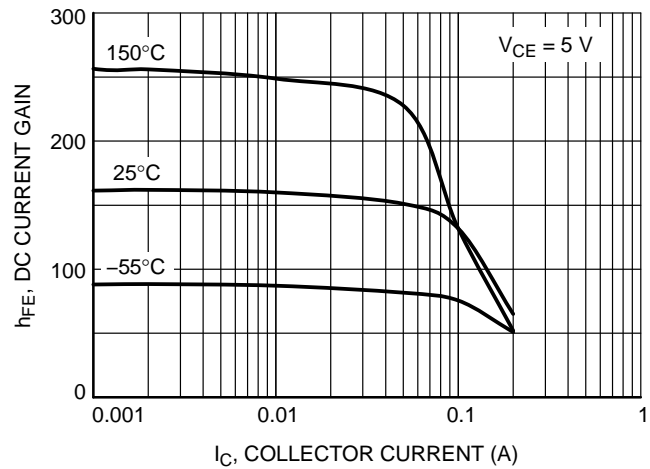


**Figure 2. DC Current Gain vs. Collector Current**

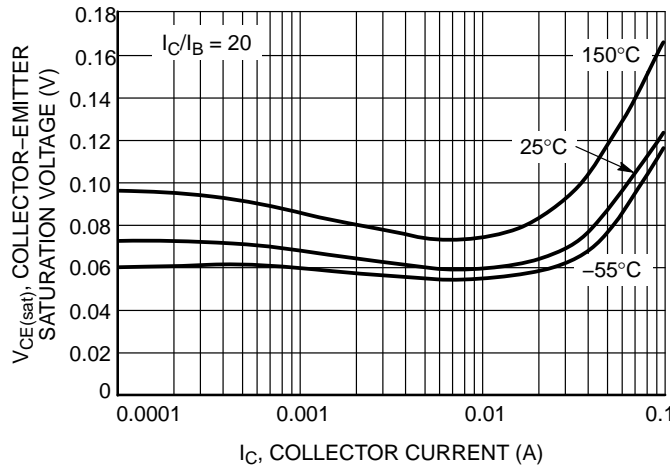

**Figure 3. Collector-Emitter Saturation Voltage vs. Collector Current**

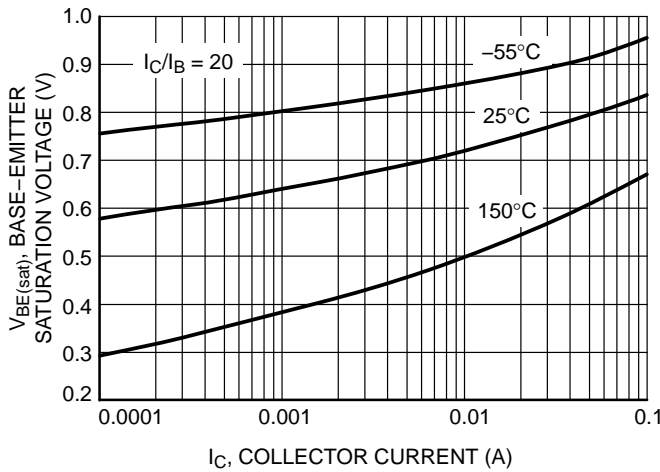

**Figure 4. Base-Emitter Saturation Voltage vs. Collector Current**

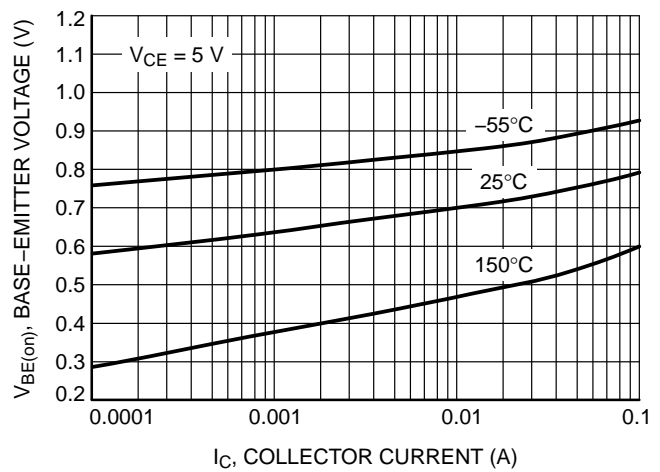

**Figure 5. Base-Emitter Voltage vs. Collector Current**

# BC846, BC847, BC848

## BC846A, BC847A, BC848A

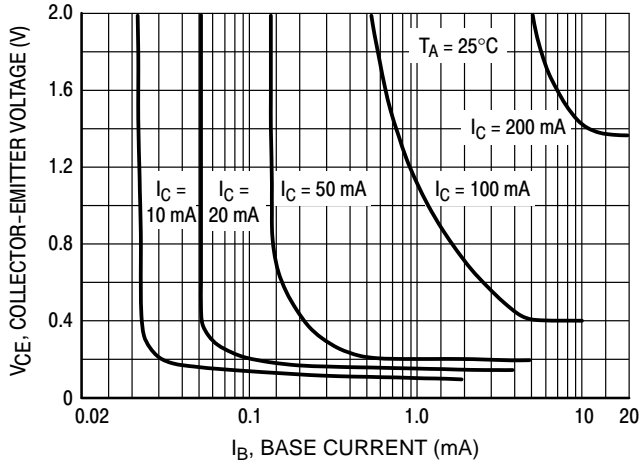


Figure 6. Collector Saturation Region

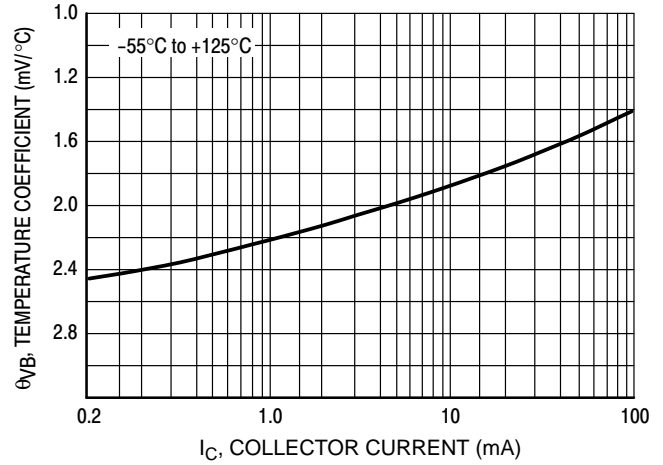


Figure 7. Base-Emitter Temperature Coefficient

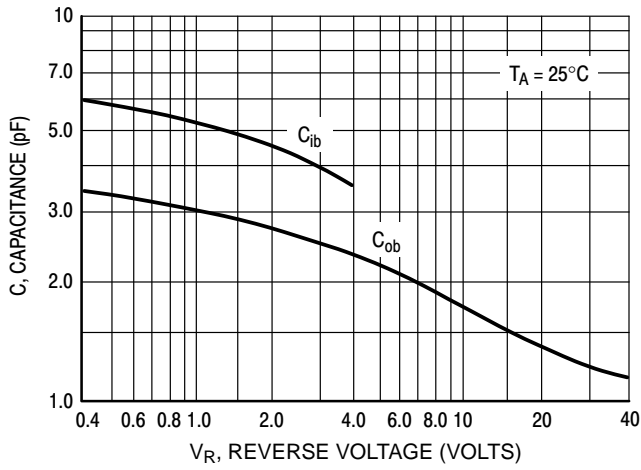


Figure 8. Capacitances


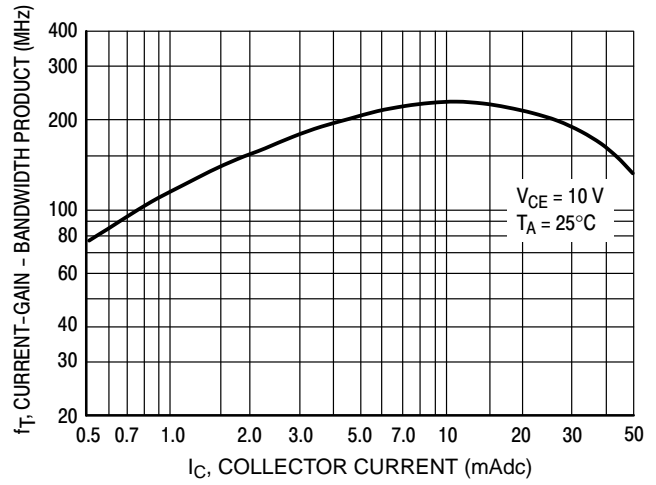



Figure 9. Current-Gain - Bandwidth Product

# BC846, BC847, BC848


## BC846B

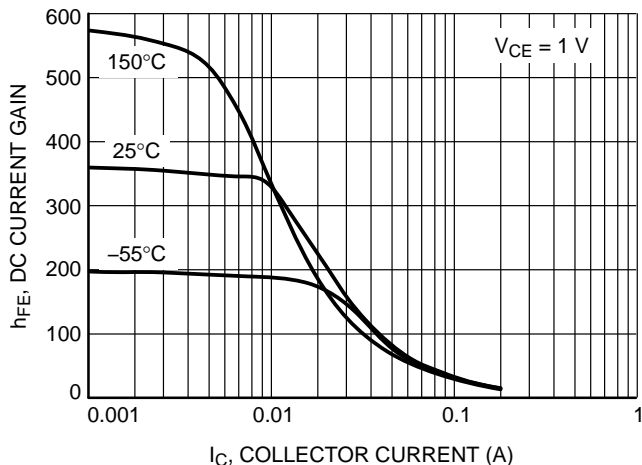


**Figure 10. DC Current Gain vs. Collector Current**

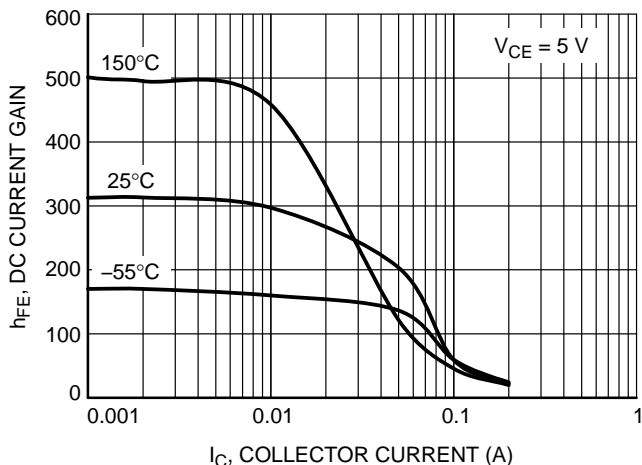


**Figure 11. DC Current Gain vs. Collector Current**

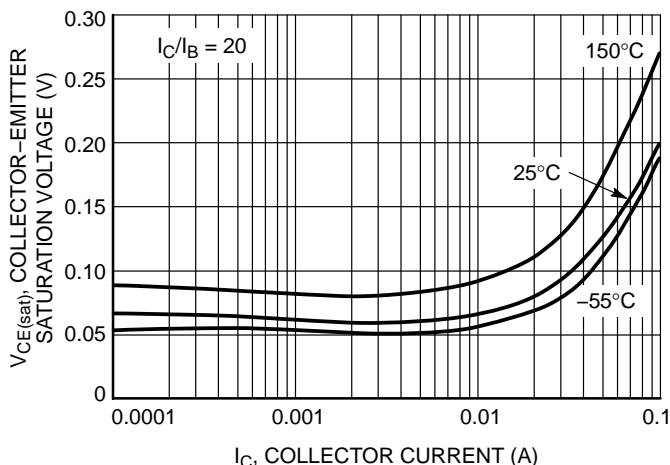

**Figure 12. Collector Emitter Saturation Voltage vs. Collector Current**

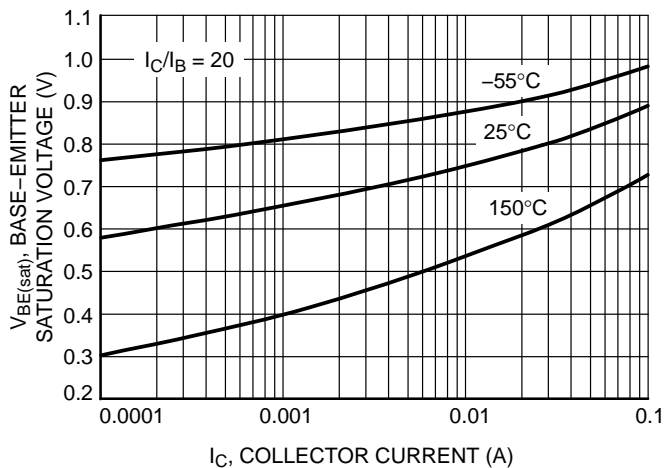

**Figure 13. Base Emitter Saturation Voltage vs. Collector Current**

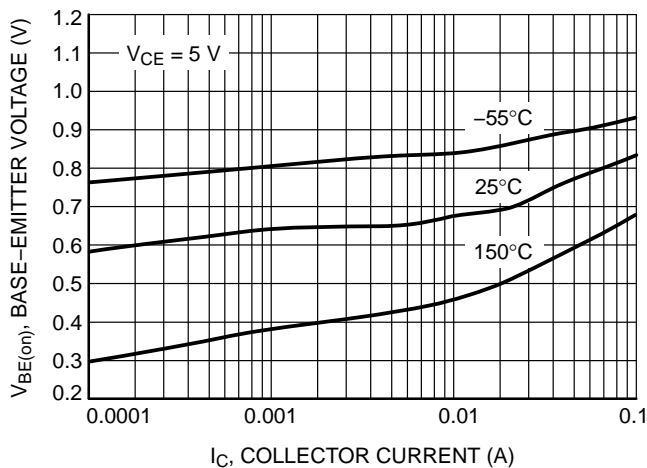

**Figure 14. Base Emitter Voltage vs. Collector Current**

BC846B

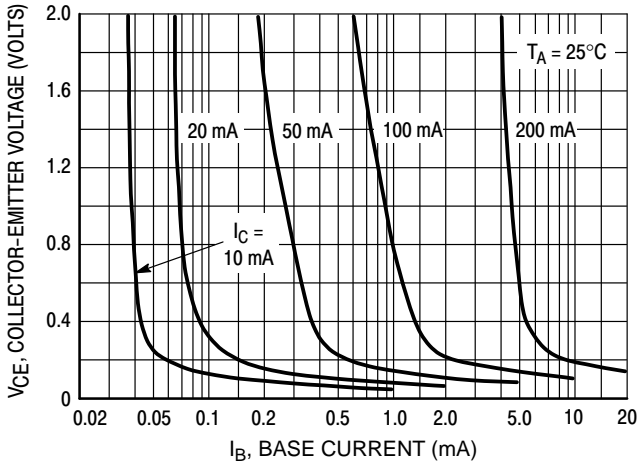


Figure 15. Collector Saturation Region

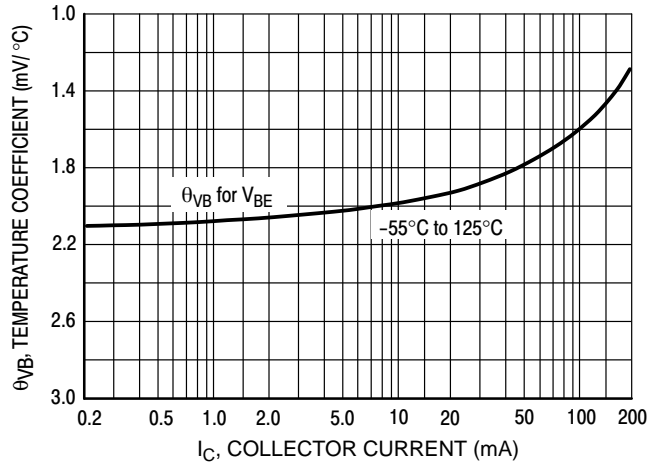


Figure 16. Base-Emitter Temperature Coefficient

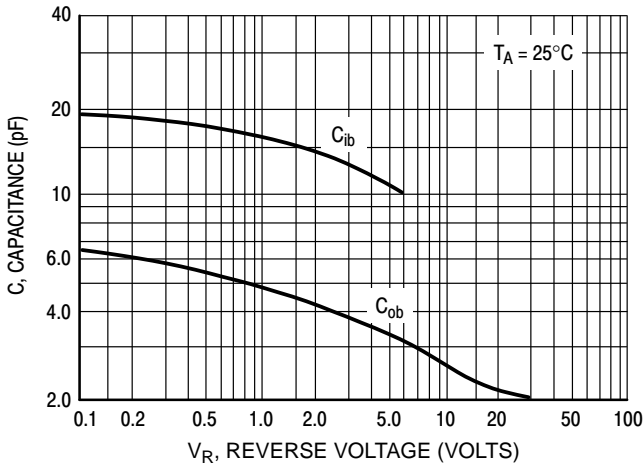


Figure 17. Capacitance


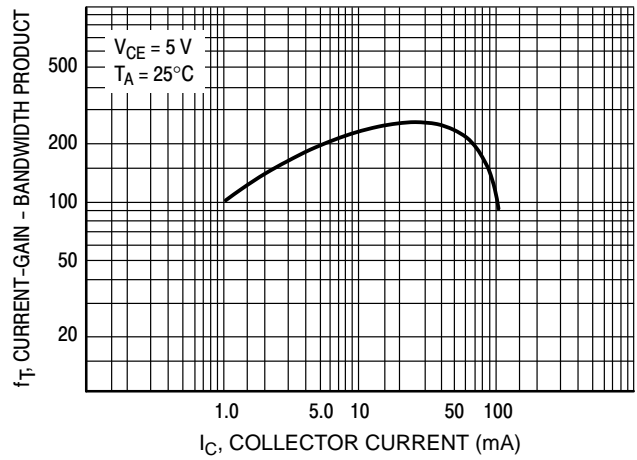



Figure 18. Current-Gain - Bandwidth Product

# BC846, BC847, BC848


## BC847B, BC848B

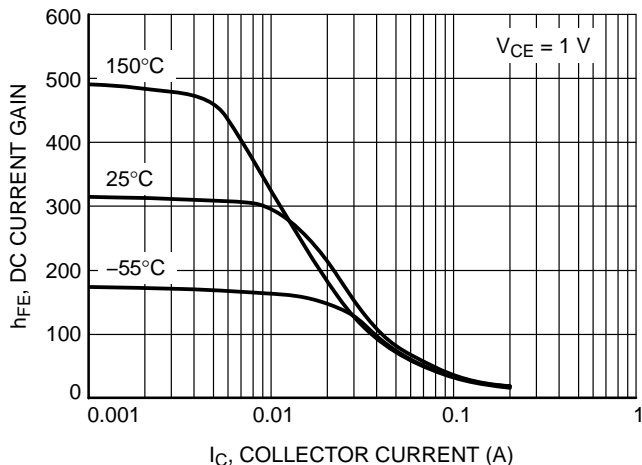


**Figure 19. DC Current Gain vs. Collector Current**

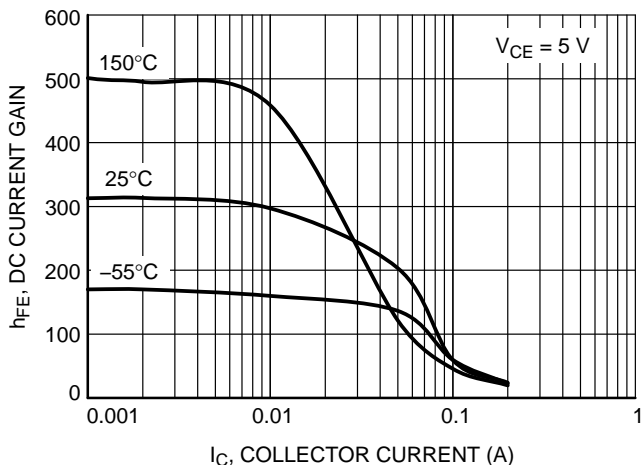


**Figure 20. DC Current Gain vs. Collector Current**

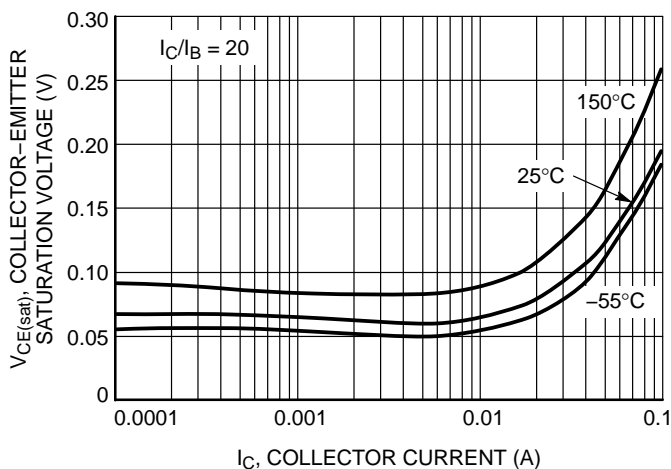

**Figure 21. Collector Emitter Saturation Voltage vs. Collector Current**

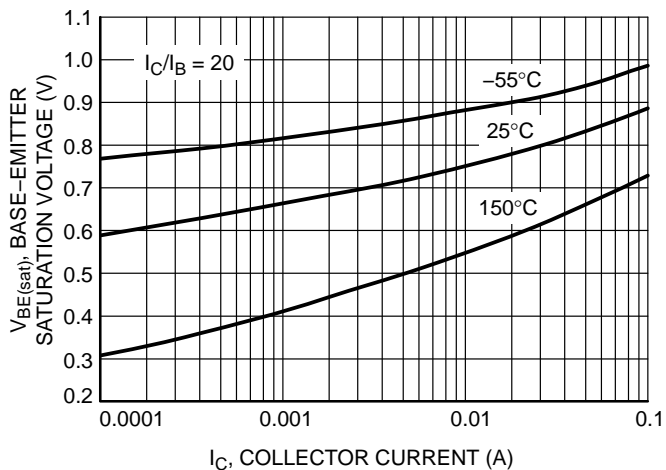

**Figure 22. Base Emitter Saturation Voltage vs. Collector Current**

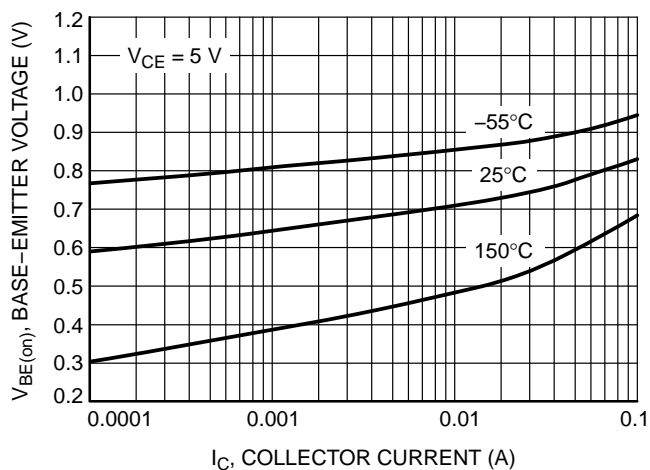

**Figure 23. Base Emitter Voltage vs. Collector Current**

BC846, BC847, BC848

BC847B, BC848B

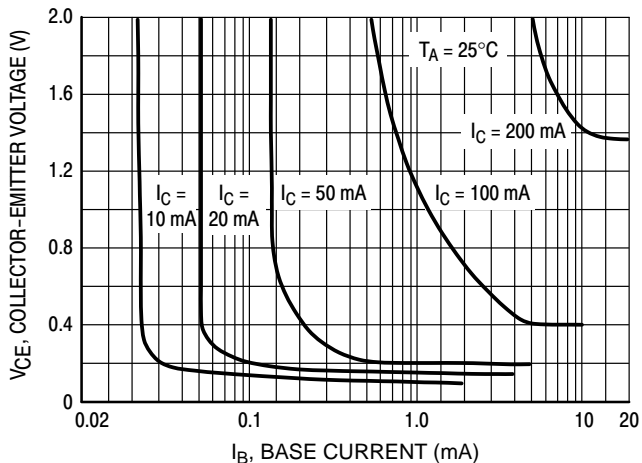


Figure 24. Collector Saturation Region

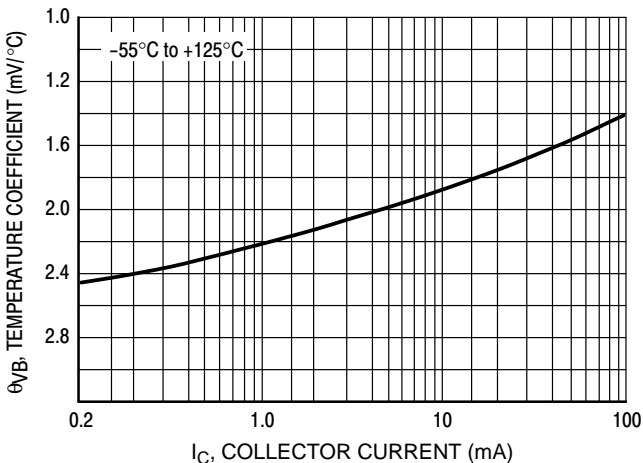


Figure 25. Base-Emitter Temperature Coefficient

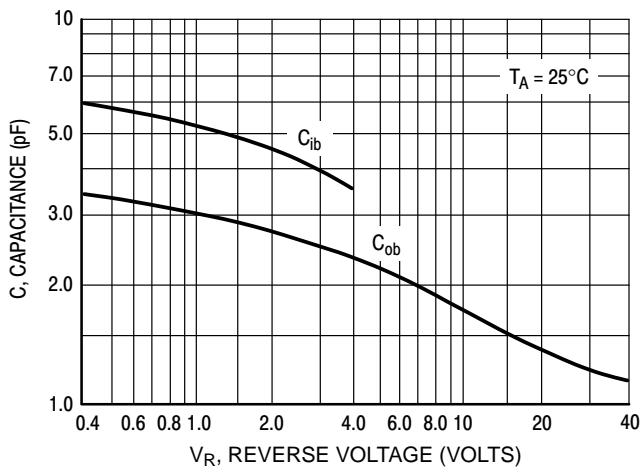


Figure 26. Capacitances


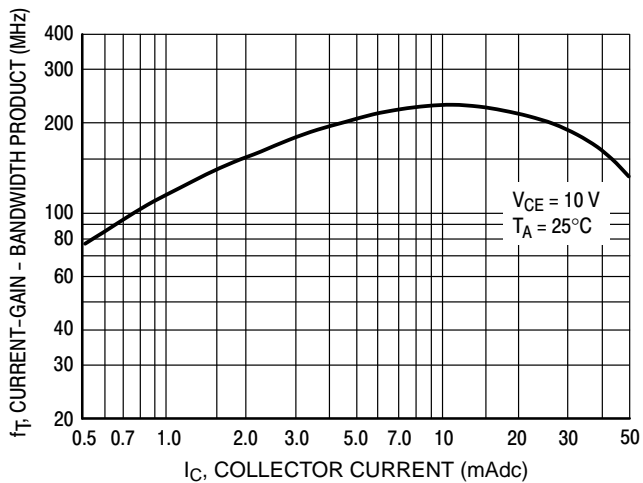


Figure 27. Current-Gain - Bandwidth Product




# BC846, BC847, BC848


## BC847C, BC848C

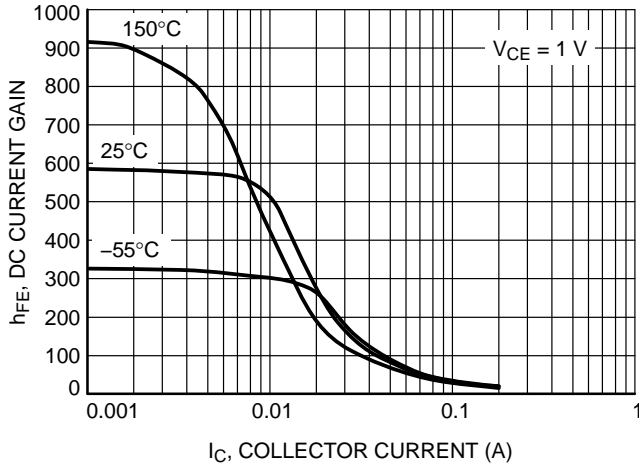


**Figure 28. DC Current Gain vs. Collector Current**

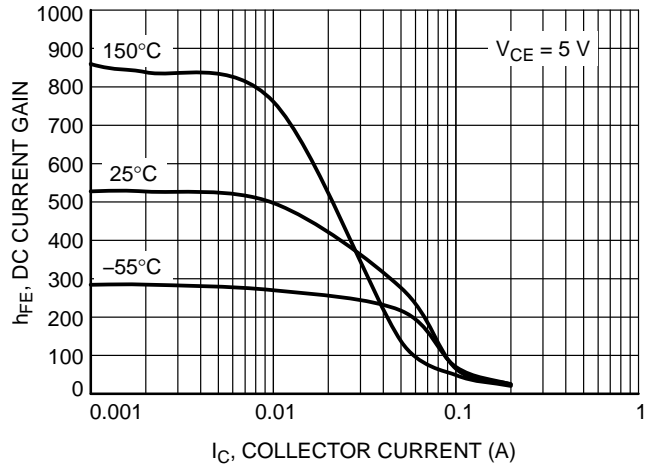


**Figure 29. DC Current Gain vs. Collector Current**

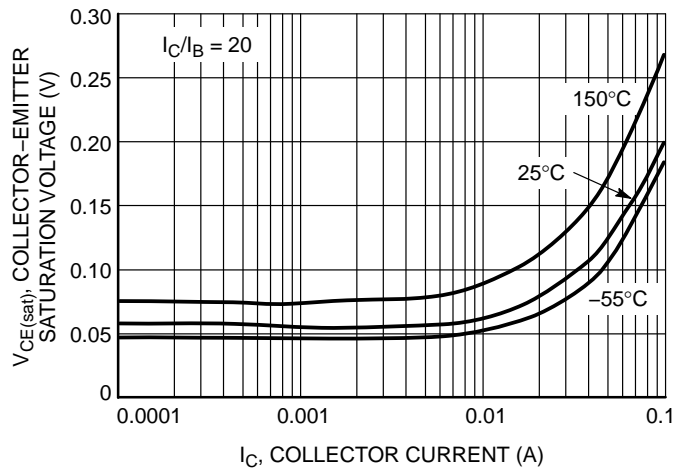

**Figure 30. Collector Emitter Saturation Voltage vs. Collector Current**

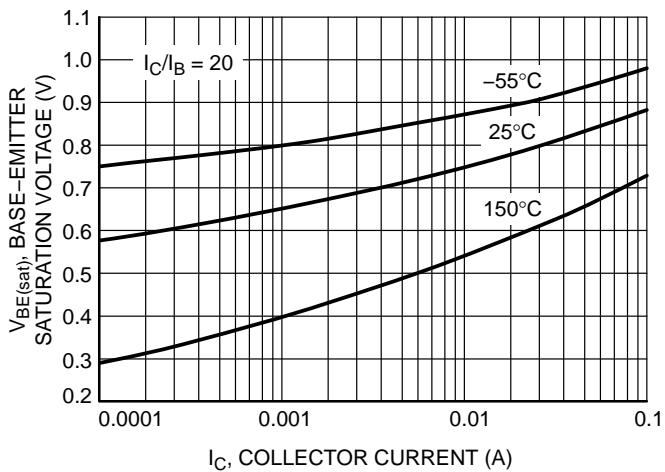

**Figure 31. Base Emitter Saturation Voltage vs. Collector Current**

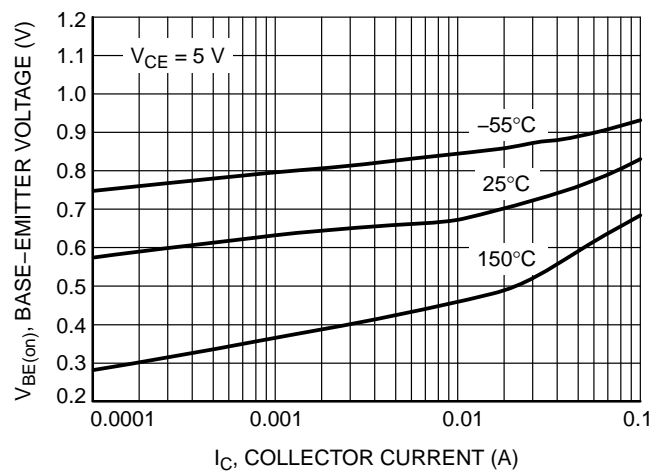

**Figure 32. Base Emitter Voltage vs. Collector Current**

BC846, BC847, BC848

BC847C, BC848C

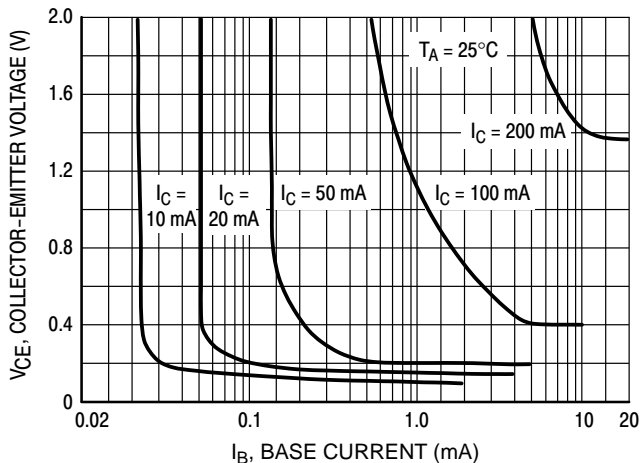


Figure 33. Collector Saturation Region

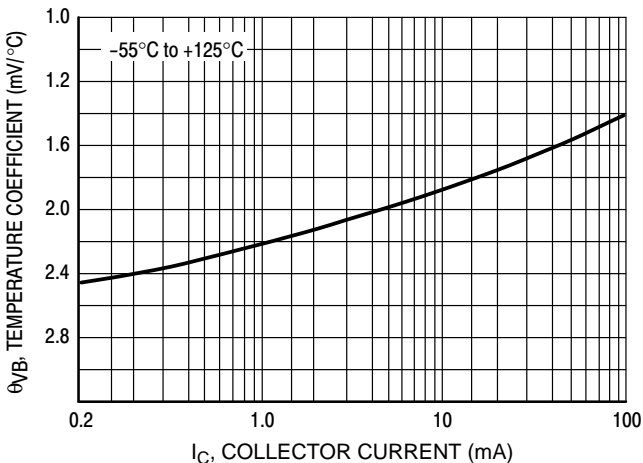


Figure 34. Base-Emitter Temperature Coefficient

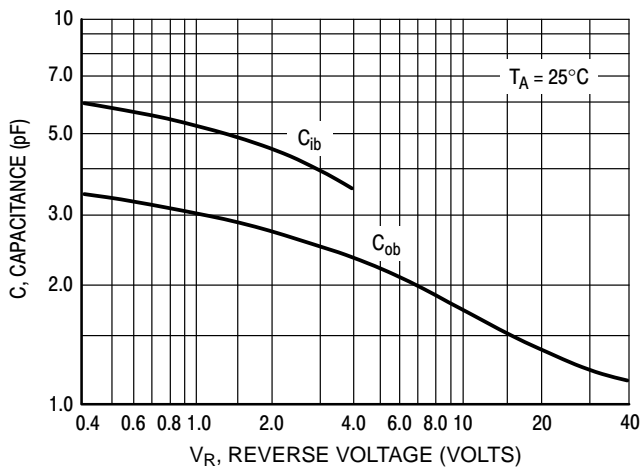


Figure 35. Capacitances



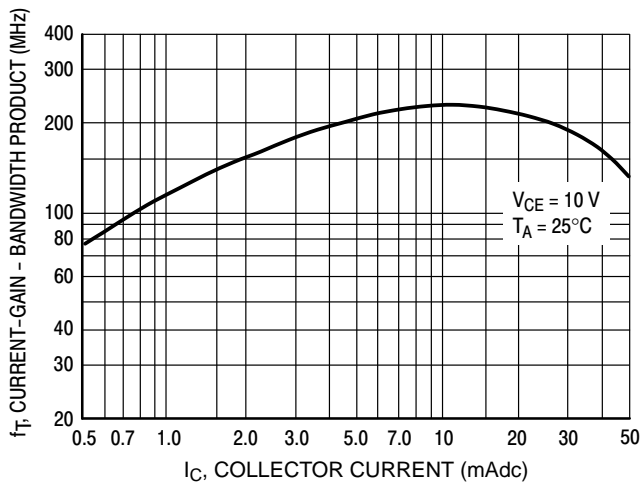


Figure 36. Current-Gain - Bandwidth Product


# BC846, BC847, BC848

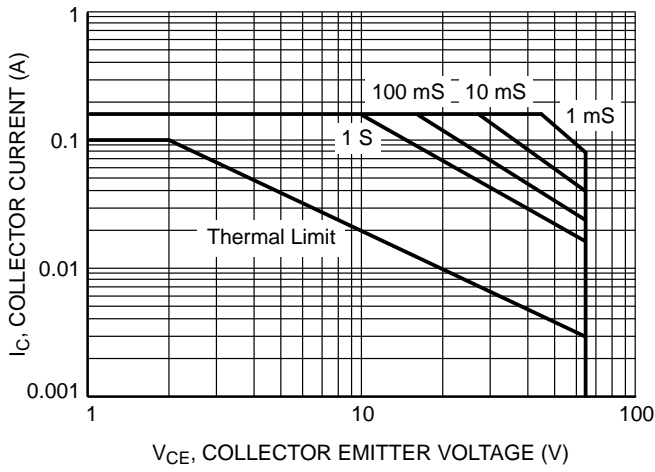

**Figure 37. Safe Operating Area for BC846A, BC846B**

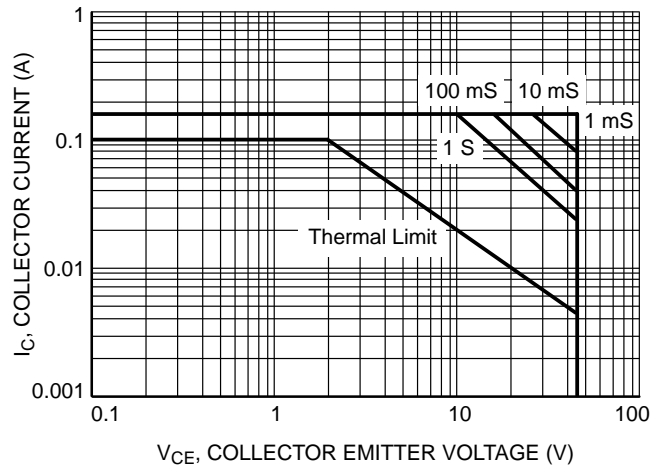

**Figure 38. Safe Operating Area for BC847A, BC847B, BC847C**

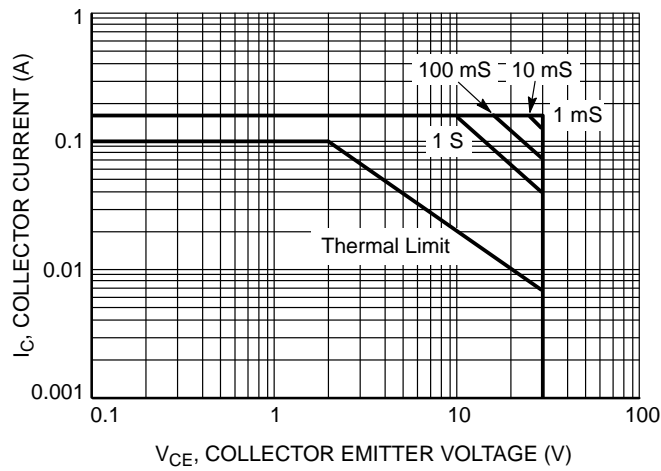

**Figure 39. Safe Operating Area for BC848A, BC848B, BC848C**

## BC846, BC847, BC848

### DEVICE ORDERING AND SPECIFIC MARKING INFORMATION

| Device         | Specific Marking Code | Package                      | Shipping†            |
|----------------|-----------------------|------------------------------|----------------------|
| BC846BWT1G     | 1B                    | SC-70 (SOT-323)<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC846BWT1G*   |                       |                              |                      |
| BC847AWT1G     | 1E                    |                              | 3,000 / Tape & Reel  |
| SBC847AWT1G*   |                       |                              |                      |
| BC847BWT1G     | 1F                    |                              | 3,000 / Tape & Reel  |
| SBC847BWT1G*   |                       |                              |                      |
| BC847CWT1G     | 1G                    |                              | 3,000 / Tape & Reel  |
| SBC847CWT1G*   |                       |                              |                      |
| BC847CWT3G     | 1G                    |                              | 10,000 / Tape & Reel |
| SBC847CWT3G*   |                       |                              |                      |
| BC848BWT1G     | 1K                    |                              | 3,000 / Tape & Reel  |
| NSVBC848BWT1G* |                       |                              |                      |
| BC848CWT1G     | 1L                    |                              |                      |


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# BC846, BC847, BC848

## PACKAGE DIMENSIONS


### SC-70 (SOT-323) CASE 419-04 ISSUE N

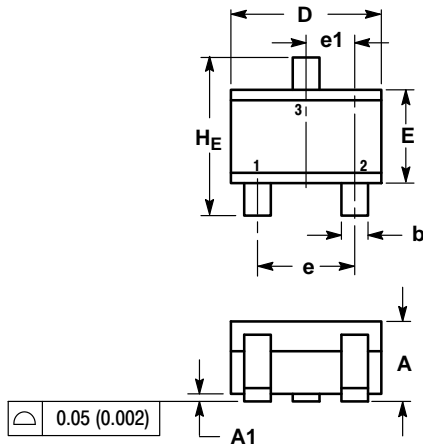

NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | MILLIMETERS |      |      | INCHES    |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | 0.80        | 0.90 | 1.00 | 0.032     | 0.035 | 0.040 |
| A1  | 0.00        | 0.05 | 0.10 | 0.000     | 0.002 | 0.004 |
| A2  | 0.70 REF    |      |      | 0.028 REF |       |       |
| b   | 0.30        | 0.35 | 0.40 | 0.012     | 0.014 | 0.016 |
| c   | 0.10        | 0.18 | 0.25 | 0.004     | 0.007 | 0.010 |
| D   | 1.80        | 2.10 | 2.20 | 0.071     | 0.083 | 0.087 |
| E   | 1.15        | 1.24 | 1.35 | 0.045     | 0.049 | 0.053 |
| e   | 1.20        | 1.30 | 1.40 | 0.047     | 0.051 | 0.055 |
| e1  | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| L   | 0.20        | 0.38 | 0.56 | 0.008     | 0.015 | 0.022 |
| HE  | 2.00        | 2.10 | 2.40 | 0.079     | 0.083 | 0.095 |



- STYLE 3:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR

### SOLDERING FOOTPRINT\*

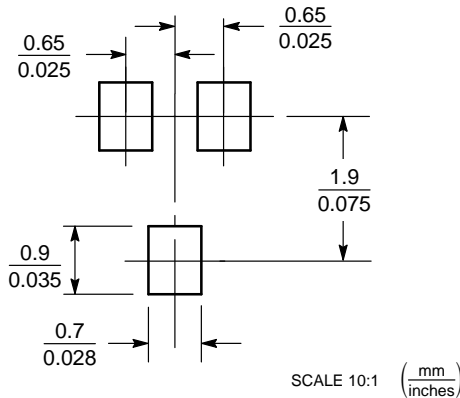

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331