MAAP-010168

10 W Power Amplifier
0.5 - 3 GHz

Rev. V1

Features

- Saturated Output Power: +41 dBm
- Linear Gain: 24 dB
- Power Added Efficiency: 30% at P_{SAT}
- 50 Ω Input / Output Match
- Ceramic Flange Mount Package
- RoHS* Compliant and 260°C Re-flow Compatible

Description

The MAAP-010168 is a two stage MMIC power amplifier designed for broadband high power applications. It can be used as either a driver or an output stage amplifier. This device is fully matched input and output to 50 Ω which eliminates any sensitive external RF tuning components.

The device is packaged in a lead free 10-lead flanged package for high volume manufacturing.

The MAAP-010168 is fabricated using a high reliability pHEMT process, to realize good power added efficiency and gain. The pHEMT process features full passivation for high performance and reliability.

Ordering Information[1]

Part Number	Package
MAAP-010168-000000	Bulk

1. Reference Application Note M567 for package handling and mounting procedure.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Functional Schematic

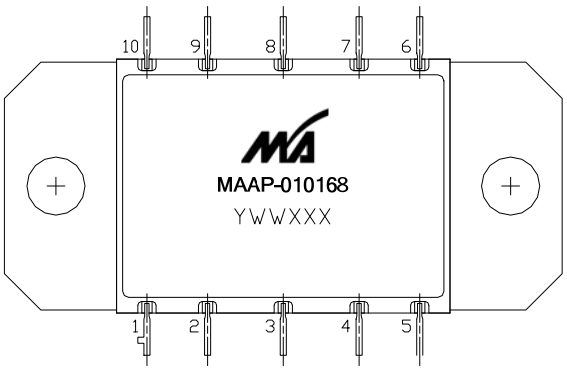

Pin Configuration[2]

Pin No.	Function
1	$V_{GG}2$
2	$V_{GG}1$
3	RF Input
4	$V_{GG}1$
5	$V_{GG}2$
6	$V_{DD}1$
7	$V_{DD}2$
8	RF Output
9	$V_{DD}2$
10	$V_{DD}1$

2. Flange is DC and RF ground.

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Electrical Specifications:
Freq. = 0.5 - 3.0 GHz, V_{DD} = 10 V, I_{DQ} = 3.5 A, T_A = 25 °C, Z_0 = 50 Ω

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	Small signal	dB	19	24	—
Input Return Loss	—	dB	—	10	—
Output Return Loss	—	dB	—	10	—
P1dB	—	dBm	—	39	—
P_{SAT}	—	dBm	38	41	—
Current	I_{DQ} P_{SAT}	A	— —	3.5 5.5	— —
PAE	P_{SAT}	%	—	30	—
Gate Bias	—	V	—	-0.7	—
Duty Cycle	—	%	—	—	100

Absolute Maximum Ratings[3,4,5]

Parameter	Absolute Maximum
Input Power	+24 dBm
Operating Supply Voltage	+11 Volts
Operating Gate Voltage	-2 Volts
Operating Temperature	-40°C to +85°C
Channel Temperature[6]	+150 °C
Storage Temperature	-40°C to +150°C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.
5. Operating at nominal conditions with $T_J \leq +150°C$ will ensure MTTF > 1 x 10^6 hours.
6. Junction Temperature (T_J) = T_C + Θ_{JC} * ((V * I) - (P_{OUT} - P_{IN}))
   Typical thermal resistance (Θ_{JC}) = 2.0°C/W
   a) For T_C = 25°C @ 1.5 GHz
   T_J = +80°C @ +10 V, 4000 mA, P_{OUT} = 41 dBm, P_{IN} = 21 dBm
   b) For T_C = 85°C @ 1.5 GHz
   T_J = +138°C @ +10 V, 3900 mA, P_{OUT} = 41 dBm, P_{IN} = 21 dBm

Recommended Bias Configuration

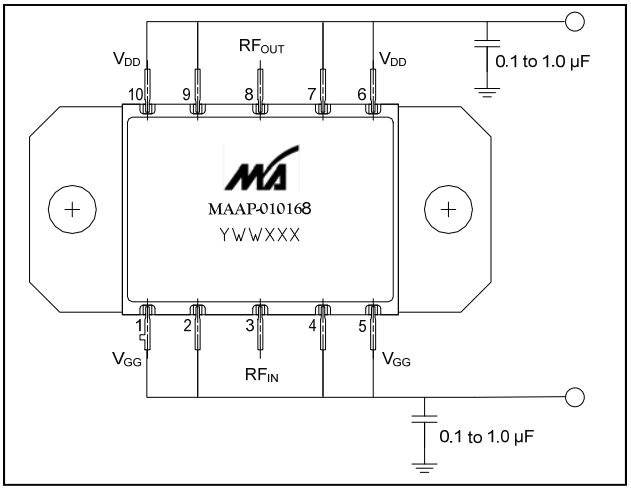

Operating the MAAP-010168

The MAAP-010168 is static sensitive. Please handle with care. To operate the device, follow these steps. Ramp down or shutdown in reverse order (gate bias on first and off last). All V_{GG} pins should have the same voltage applied at all times.

1. Apply V_{GG} (-1.5 V).
2. Apply V_{DD} (10.0 V Typical).
3. Set I_{DQ} by adjusting V_{GG}.
4. Apply RF_{IN}.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Typical Performance Curves

Gain

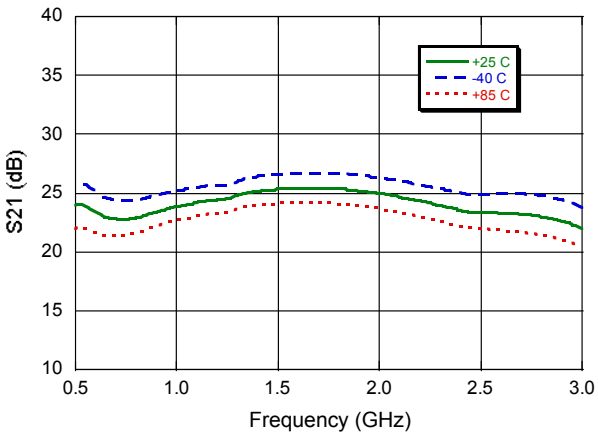

Input Return Loss

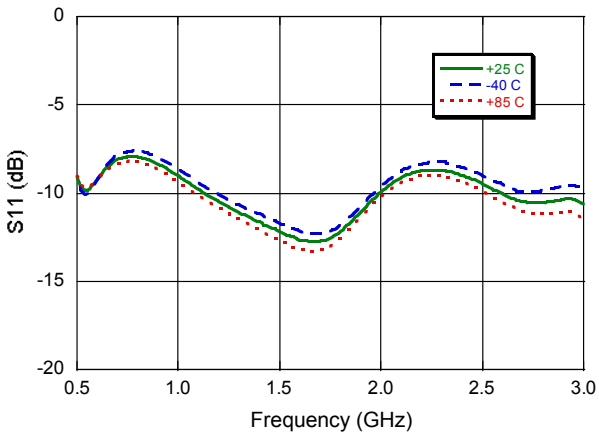

Output Return Loss

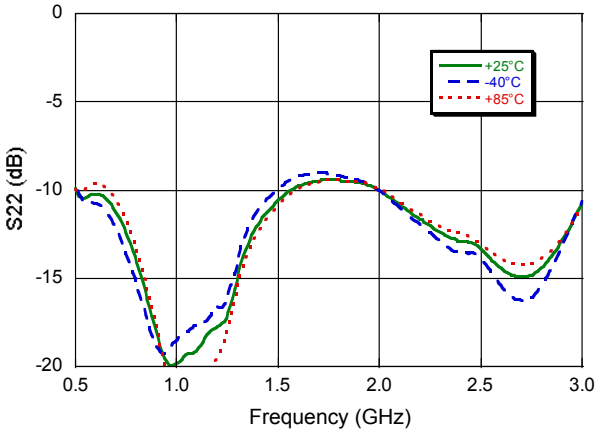

Reverse Isolation

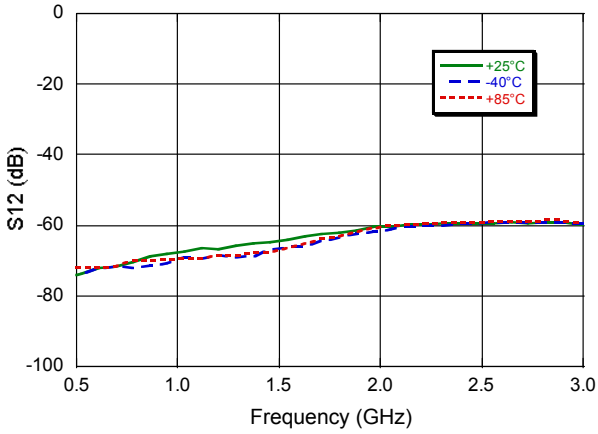

Output Power (dBm)

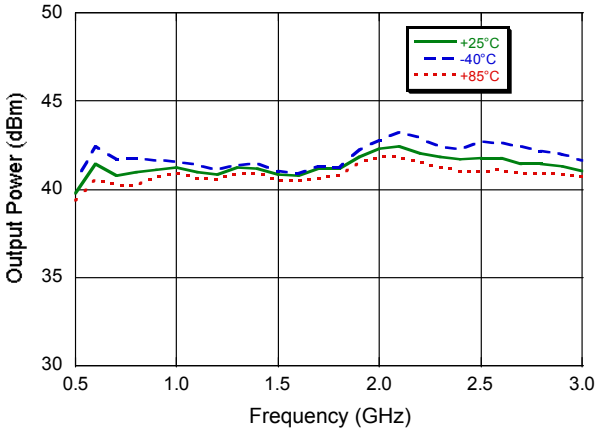

Output Power (W)

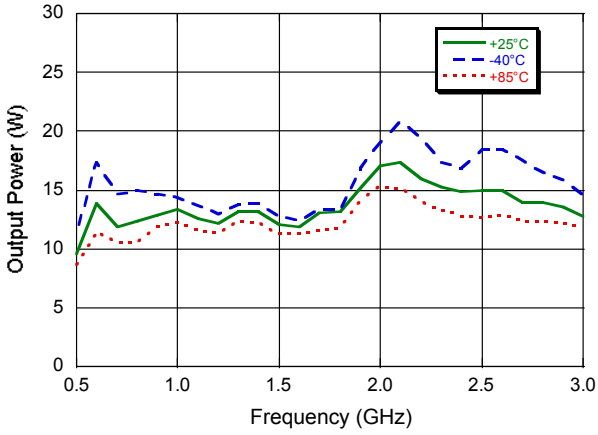

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Typical Performance Curves

Power Gain

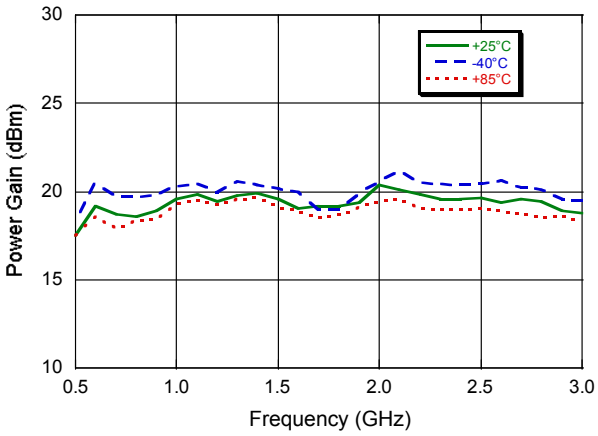

Output Power Sweep @ 0.7 GHz

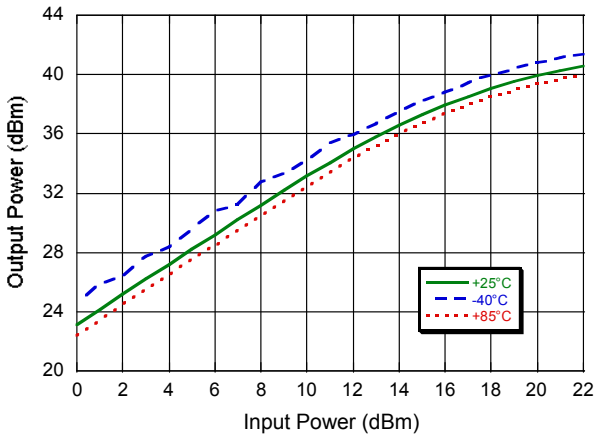

Power Added Efficiency

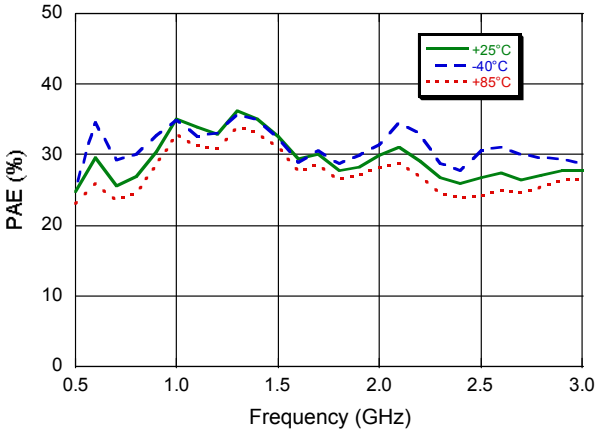

Output Power Sweep @ 1.5 GHz

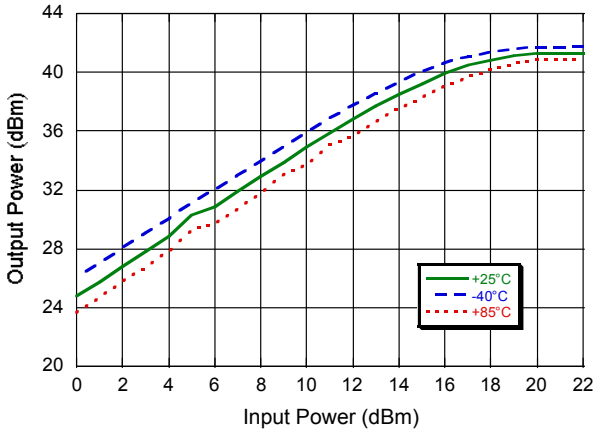

Drain Current

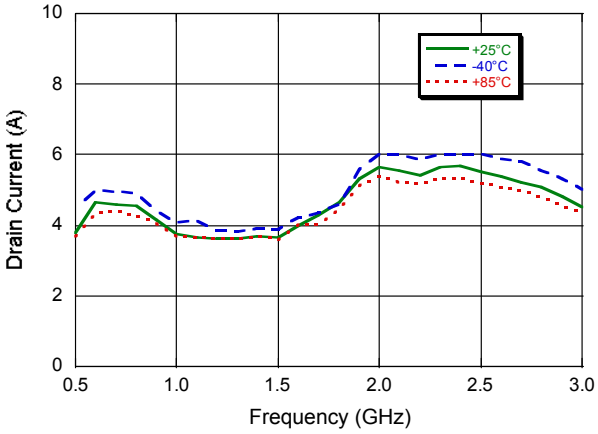

Output Power Sweep @ 2.5 GHz

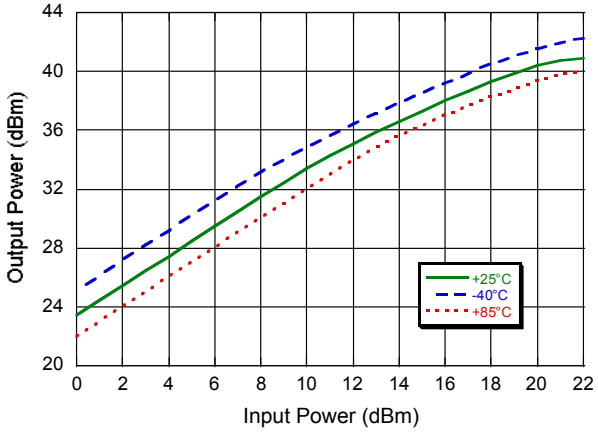

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Typical Performance Curves

Power Gain vs. Input Power @ 0.7 GHz

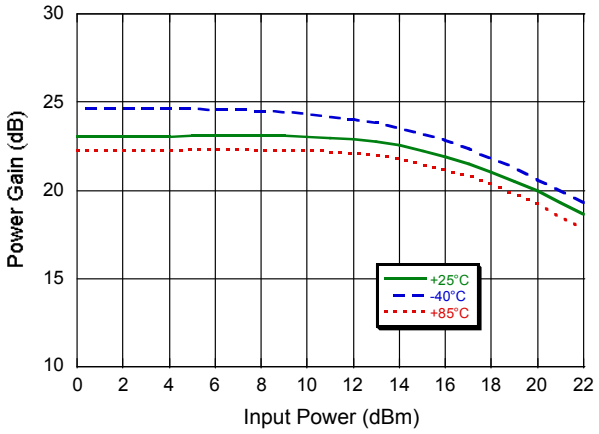

Power Gain vs. Output Power @ 0.7 GHz

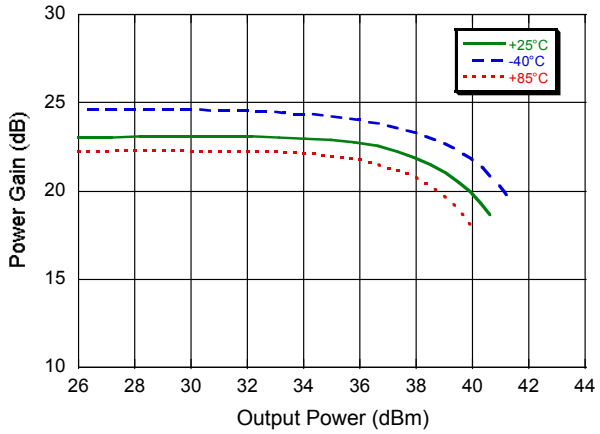

Power Gain vs. Input Power @ 1.5 GHz

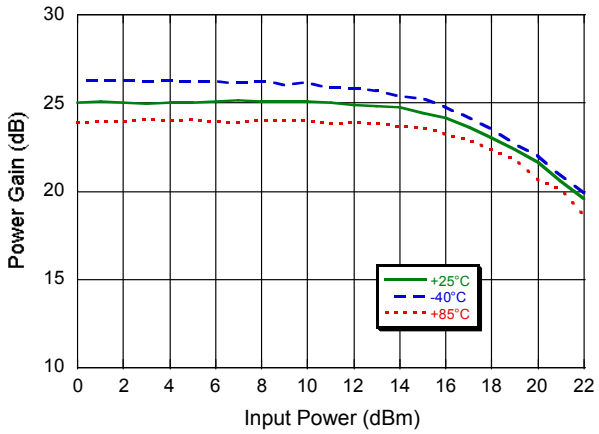

Power Gain vs. Output Power @ 1.5 GHz

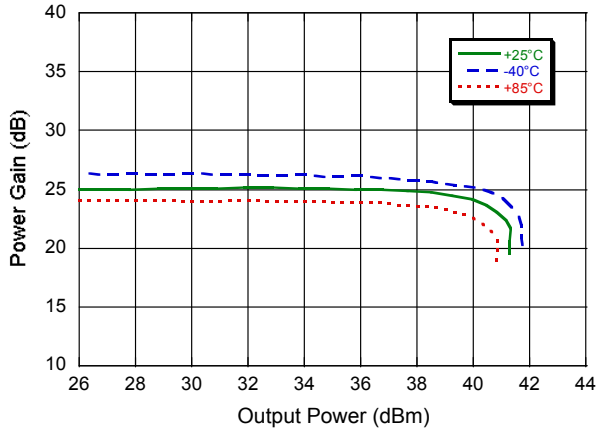

Power Gain vs. Input Power @ 2.5 GHz

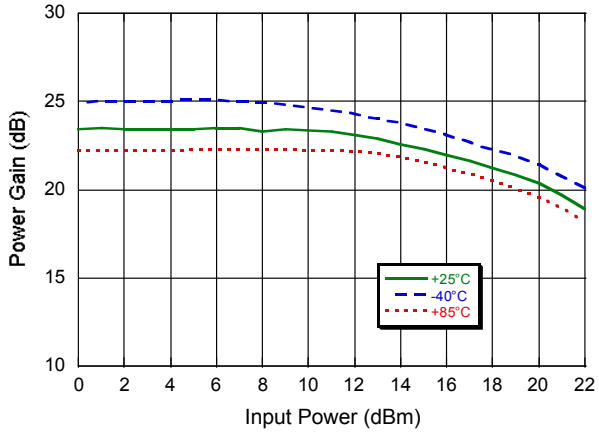

Power Gain vs. Output Power @ 2.5 GHz

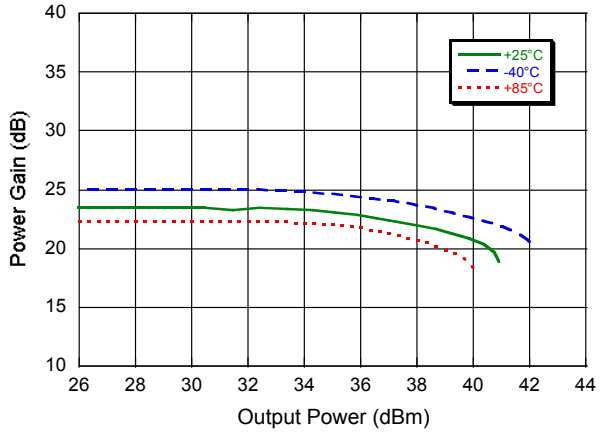

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Typical Performance Curves

Max. Power Dissipation vs. Base Plate Temperature[7]

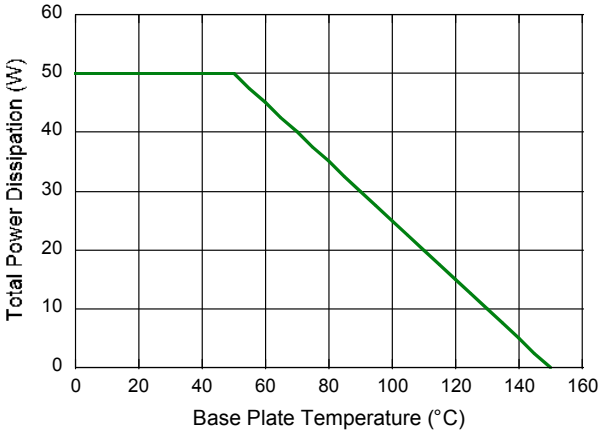

Junction Temperature vs. Base Plate Temperature with 50 W Power Dissipation

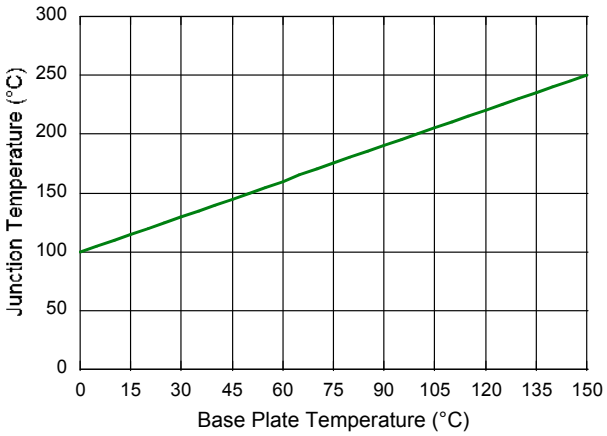

7. Power dissipation should not exceed the maximum plot shown above to maintain T_J <150°C. It is recommended to monitor power dissipation and decrease power dissipation in the device as required.

Ceramic Flange Mount Package†

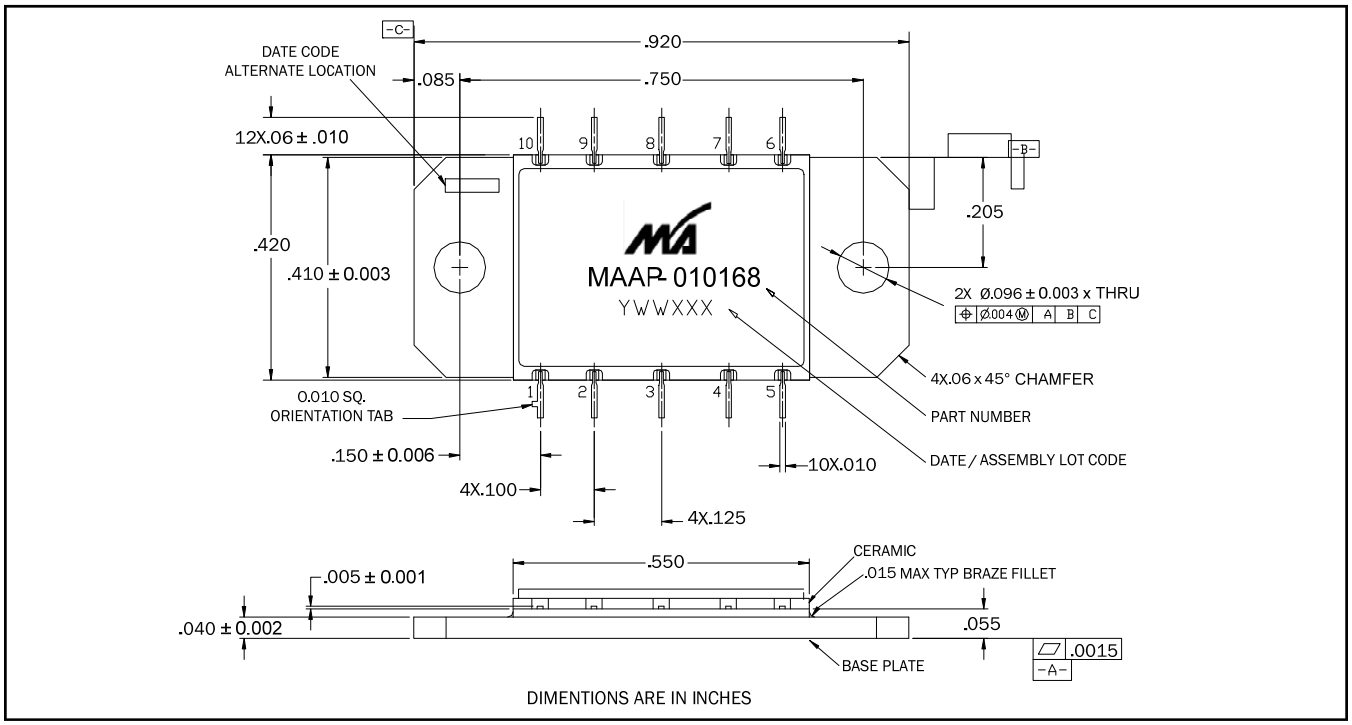

† Reference Application Note M538 for lead-free solder reflow recommendations.
This is a high frequency, low thermal resistance package. The package consists of a cofired ceramic construction with a copper-tungsten base and iron-nickel-cobalt leads. The finish consists of electrolytic gold over nickel plate.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331