

# IRF3717PbF

HEXFET® Power MOSFET



## Applications

- Synchronous MOSFET for Notebook Processor Power
- Synchronous Rectifier MOSFET for Isolated DC-DC Converters in Networking Systems
- Lead-Free

## Benefits

- Ultra-Low Gate Impedance
- Very Low  $R_{DS(on)}$
- Fully Characterized Avalanche Voltage and Current

| $V_{DSS}$ | $R_{DS(on)}$ max            | $I_D$ |
|-----------|-----------------------------|-------|
| 20V       | $4.4m\Omega @ V_{GS} = 10V$ | 20A   |



## Absolute Maximum Ratings

|                          | Parameter                                | Max.         | Units |
|--------------------------|------------------------------------------|--------------|-------|
| $V_{DS}$                 | Drain-to-Source Voltage                  | 20           | V     |
| $V_{GS}$                 | Gate-to-Source Voltage                   | $\pm 20$     |       |
| $I_D @ T_A = 25^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 20           | A     |
| $I_D @ T_A = 70^\circ C$ | Continuous Drain Current, $V_{GS} @ 10V$ | 16           |       |
| $I_{DM}$                 | Pulsed Drain Current ①                   | 160          |       |
| $P_D @ T_A = 25^\circ C$ | Power Dissipation                        | 2.5          | W     |
| $P_D @ T_A = 70^\circ C$ | Power Dissipation                        | 1.6          |       |
|                          | Linear Derating Factor                   | 0.02         | W/°C  |
| $T_J$                    | Operating Junction and                   | -55 to + 150 | °C    |
| $T_{STG}$                | Storage Temperature Range                |              |       |

## Thermal Resistance

|                 | Parameter              | Typ. | Max. | Units |
|-----------------|------------------------|------|------|-------|
| $R_{\theta JL}$ | Junction-to-Drain Lead | —    | 20   | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient ④  | —    | 50   |       |

Notes ① through ④ are on page 10

www.irf.com

## Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)


|                                | Parameter                                  | Min. | Typ.  | Max. | Units                | Conditions                                                             |
|--------------------------------|--------------------------------------------|------|-------|------|----------------------|------------------------------------------------------------------------|
| $BV_{DSS}$                     | Drain-to-Source Breakdown Voltage          | 20   | —     | —    | V                    | $V_{GS} = 0V, I_D = 250\mu A$                                          |
| $\Delta BV_{DSS}/\Delta T_J$   | Breakdown Voltage Temp. Coefficient        | —    | 0.014 | —    | V/ $^\circ\text{C}$  | Reference to $25^\circ\text{C}, I_D = 1mA$                             |
| $R_{DS(on)}$                   | Static Drain-to-Source On-Resistance       | —    | 3.7   | 4.4  | $m\Omega$            | $V_{GS} = 10V, I_D = 20A$ ③                                            |
|                                |                                            | —    | 4.8   | 5.7  |                      | $V_{GS} = 4.5V, I_D = 16A$ ③                                           |
| $V_{GS(th)}$                   | Gate Threshold Voltage                     | 1.55 | 2.0   | 2.45 | V                    | $V_{DS} = V_{GS}, I_D = 250\mu A$                                      |
| $\Delta V_{GS(th)}/\Delta T_J$ | Gate Threshold Voltage Coefficient         | —    | -5.4  | —    | mV/ $^\circ\text{C}$ |                                                                        |
| $I_{DSS}$                      | Drain-to-Source Leakage Current            | —    | —     | 1.0  | $\mu A$              | $V_{DS} = 16V, V_{GS} = 0V$                                            |
|                                |                                            | —    | —     | 150  |                      | $V_{DS} = 16V, V_{GS} = 0V, T_J = 125^\circ\text{C}$                   |
| $I_{GSS}$                      | Gate-to-Source Forward Leakage             | —    | —     | 100  | nA                   | $V_{GS} = 20V$                                                         |
|                                | Gate-to-Source Reverse Leakage             | —    | —     | -100 |                      | $V_{GS} = -20V$                                                        |
| $g_{fs}$                       | Forward Transconductance                   | 57   | —     | —    | S                    | $V_{DS} = 10V, I_D = 16A$                                              |
| $Q_g$                          | Total Gate Charge                          | —    | 22    | 33   | nC                   | $V_{DS} = 10V$<br>$V_{GS} = 4.5V$<br>$I_D = 16A$<br>See Fig. 16        |
| $Q_{gs1}$                      | Pre-V <sub>th</sub> Gate-to-Source Charge  | —    | 6.8   | —    |                      |                                                                        |
| $Q_{gs2}$                      | Post-V <sub>th</sub> Gate-to-Source Charge | —    | 2.2   | —    |                      |                                                                        |
| $Q_{gd}$                       | Gate-to-Drain Charge                       | —    | 7.3   | —    |                      |                                                                        |
| $Q_{godr}$                     | Gate Charge Overdrive                      | —    | 5.7   | —    |                      |                                                                        |
| $Q_{sw}$                       | Switch Charge ( $Q_{gs2} + Q_{gd}$ )       | —    | 9.5   | —    | nC                   | $V_{DS} = 10V, V_{GS} = 0V$                                            |
| $Q_{oss}$                      | Output Charge                              | —    | 12    | —    |                      |                                                                        |
| $t_{d(on)}$                    | Turn-On Delay Time                         | —    | 12    | —    | ns                   | $V_{DD} = 10V, V_{GS} = 4.5V$<br>$I_D = 16A$<br>Clamped Inductive Load |
| $t_r$                          | Rise Time                                  | —    | 14    | —    |                      |                                                                        |
| $t_{d(off)}$                   | Turn-Off Delay Time                        | —    | 15    | —    |                      |                                                                        |
| $t_f$                          | Fall Time                                  | —    | 6.0   | —    |                      |                                                                        |
| $C_{iss}$                      | Input Capacitance                          | —    | 2890  | —    | pF                   | $V_{GS} = 0V$<br>$V_{DS} = 10V$<br>$f = 1.0MHz$                        |
| $C_{oss}$                      | Output Capacitance                         | —    | 930   | —    |                      |                                                                        |
| $C_{rss}$                      | Reverse Transfer Capacitance               | —    | 430   | —    |                      |                                                                        |





## Avalanche Characteristics

|          | Parameter                       | Typ. | Max. | Units |
|----------|---------------------------------|------|------|-------|
| $E_{AS}$ | Single Pulse Avalanche Energy ② | —    | 32   | mJ    |
| $I_{AR}$ | Avalanche Current ①             | —    | 16   | A     |

## Diode Characteristics


|          | Parameter                                 | Min. | Typ. | Max. | Units | Conditions                                                              |
|----------|-------------------------------------------|------|------|------|-------|-------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —    | —    | 20   | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode. |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —    | —    | 160  |       |                                                                         |
| $V_{SD}$ | Diode Forward Voltage                     | —    | —    | 1.0  | V     | $T_J = 25^\circ\text{C}, I_S = 16A, V_{GS} = 0V$ ③                      |
| $t_{rr}$ | Reverse Recovery Time                     | —    | 22   | 32   | ns    | $T_J = 25^\circ\text{C}, I_F = 16A, V_{DD} = 10V$                       |
| $Q_{rr}$ | Reverse Recovery Charge                   | —    | 13   | 19   | nC    | $di/dt = 100A/\mu s$ ③                                                  |



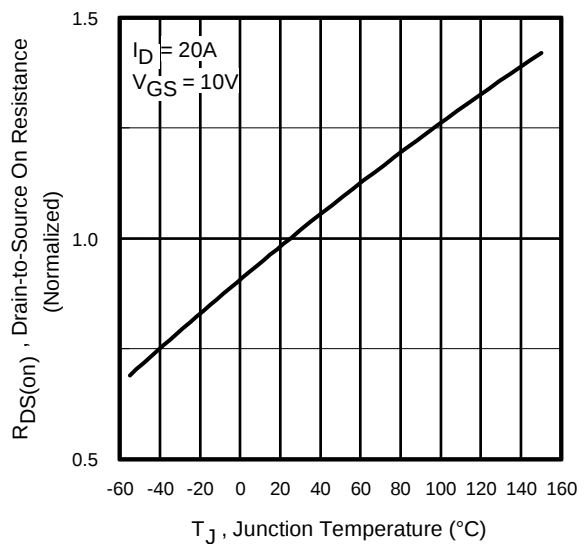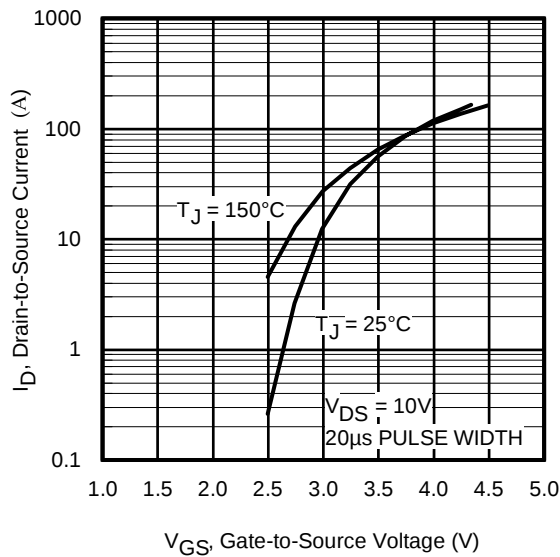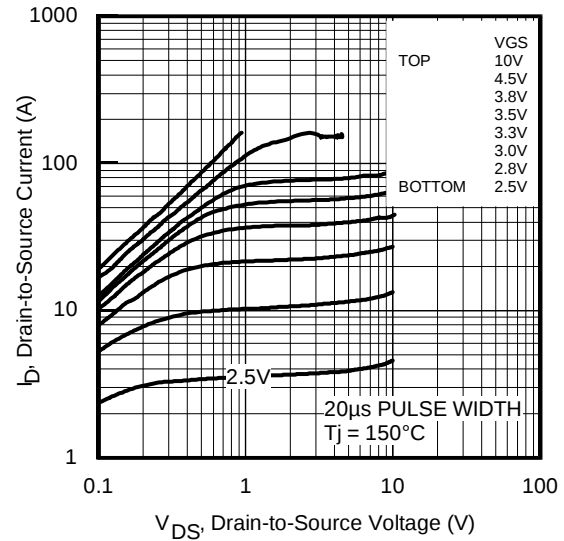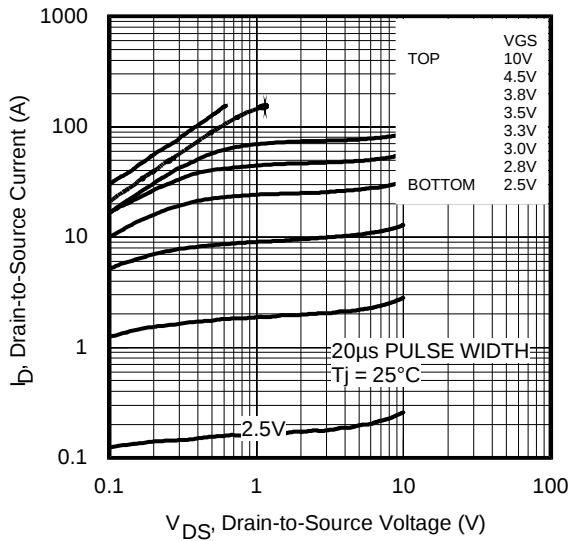


# IRF3717PbF


International  
**IR** Rectifier

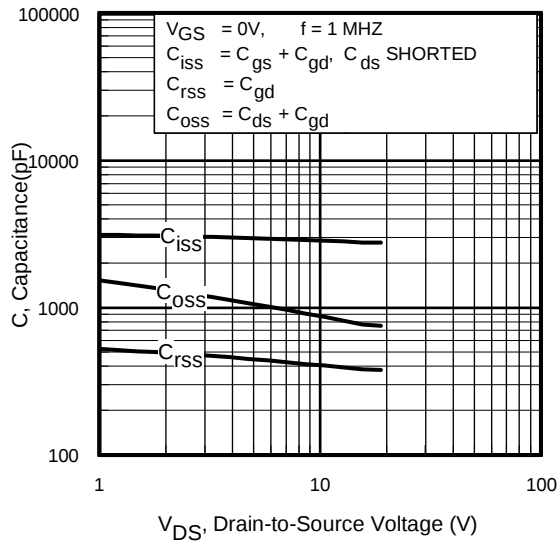


**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage

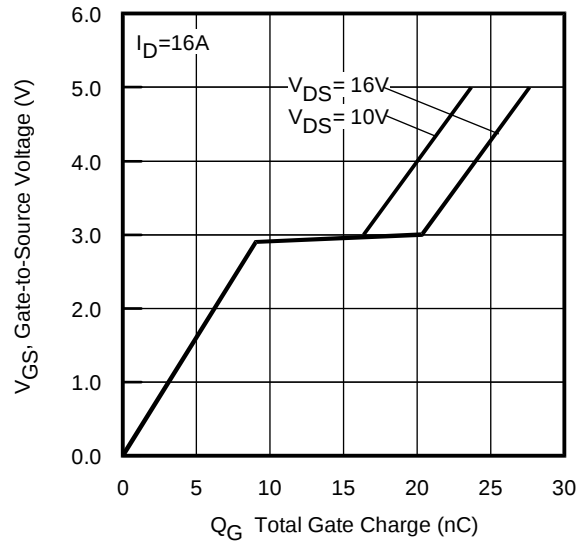


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

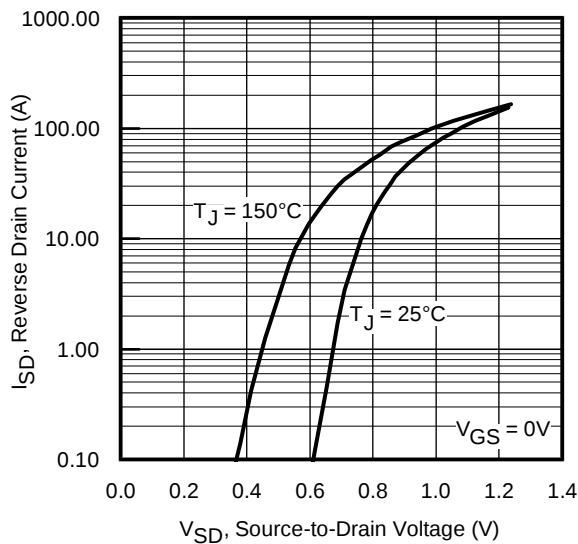


**Fig 7.** Typical Source-Drain Diode Forward Voltage

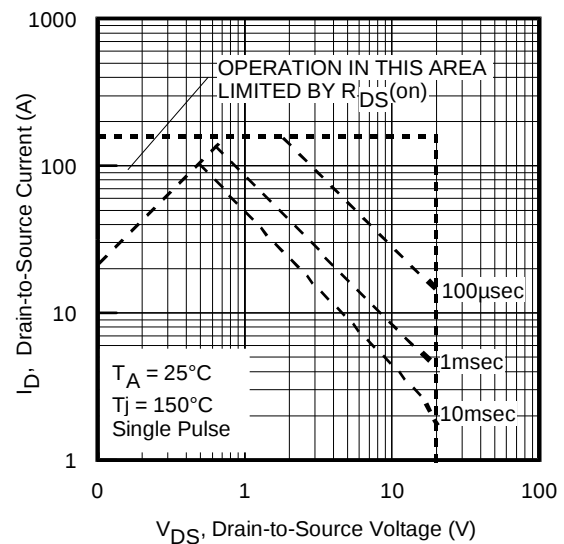


**Fig 8.** Maximum Safe Operating Area

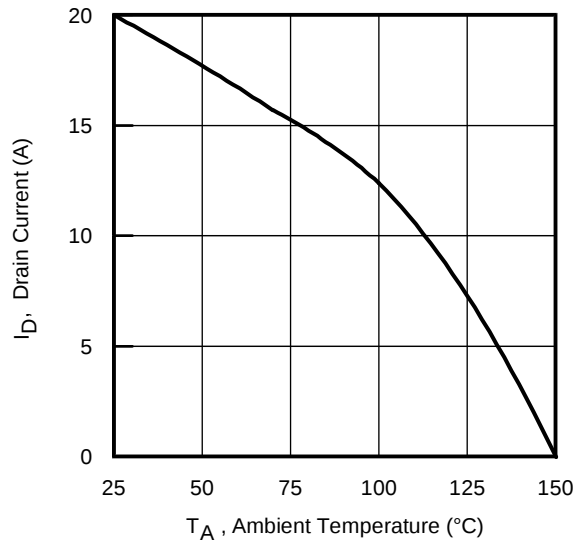

**Fig 9.** Maximum Drain Current vs. Ambient Temperature

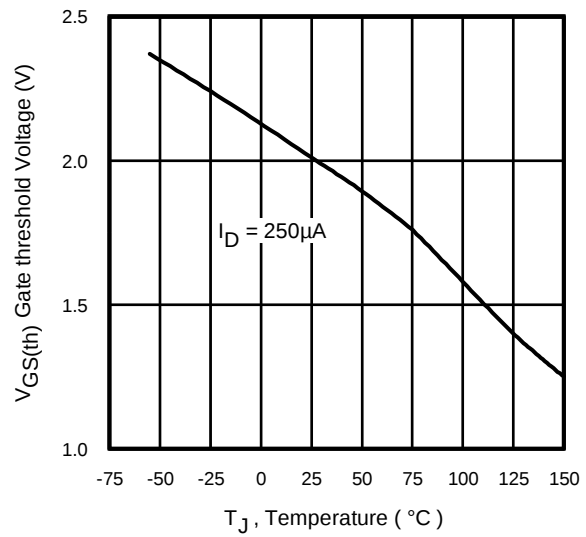


**Fig 10.** Threshold Voltage vs. Temperature

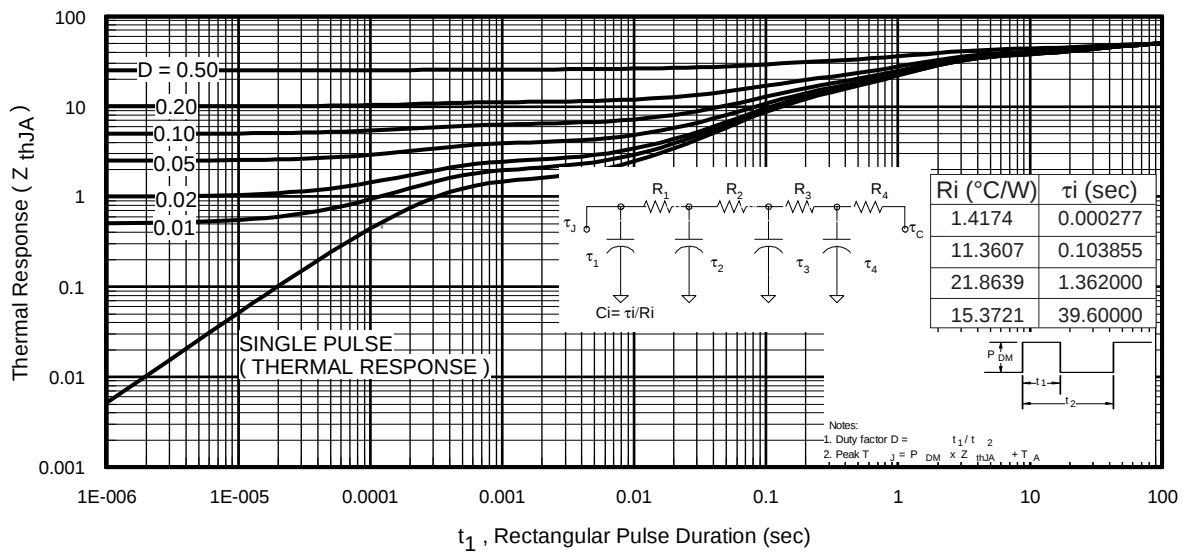


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

# IRF3717PbF


International  
**IR** Rectifier

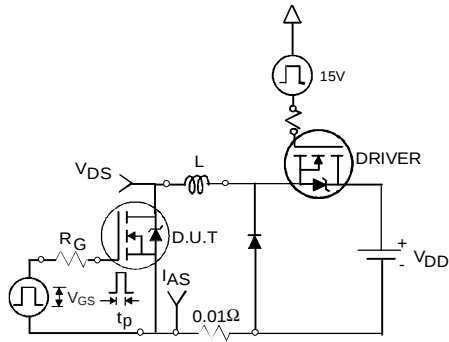


**Fig 12a.** Unclamped Inductive Test Circuit

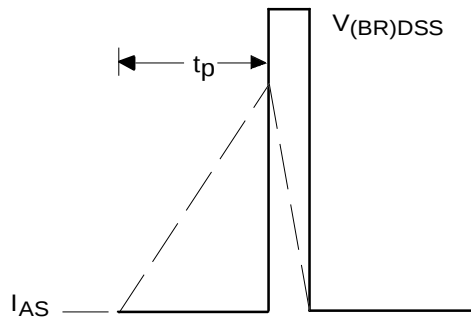


**Fig 12b.** Unclamped Inductive Waveforms

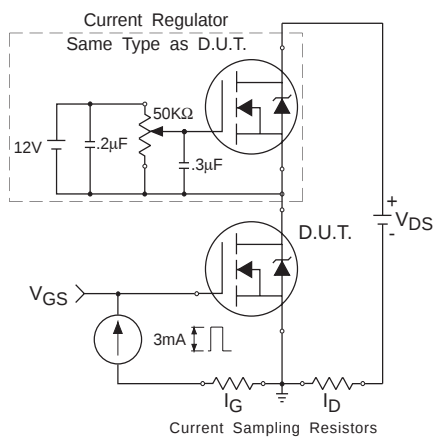


**Fig 13.** Gate Charge Test Circuit

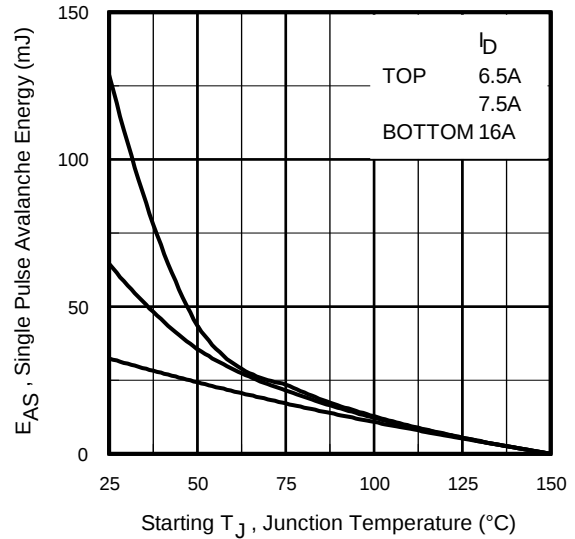

**Fig 12c.** Maximum Avalanche Energy vs. Drain Current

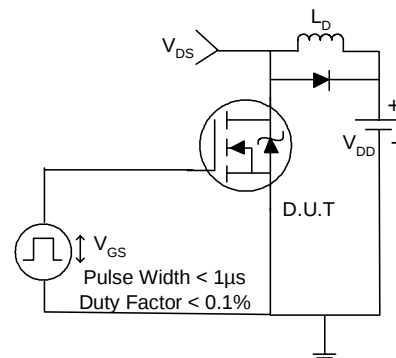


**Fig 14a.** Switching Time Test Circuit

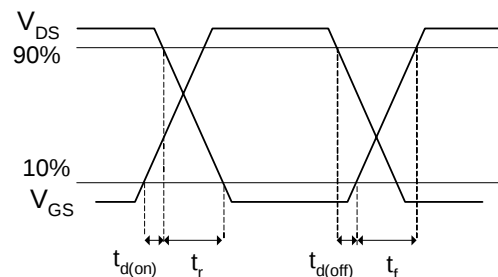


**Fig 14b.** Switching Time Waveforms

www.irf.com

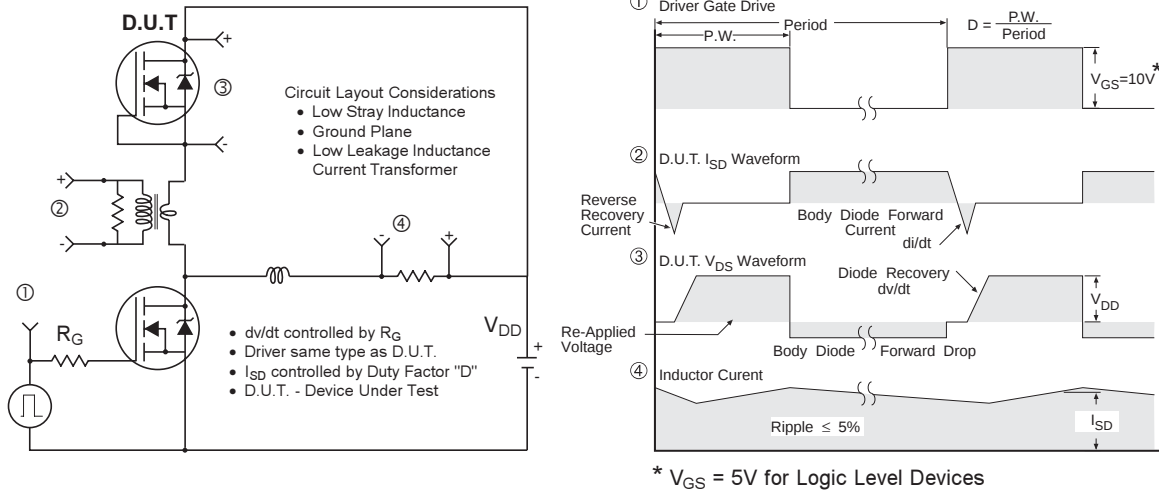

**Fig 15. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**

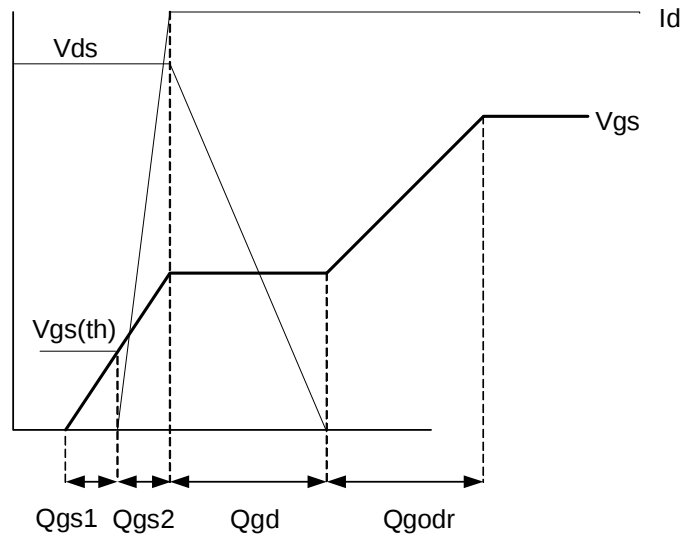

**Fig 16. Gate Charge Waveform**

## Power MOSFET Selection for Non-Isolated DC/DC Converters

### Control FET

Special attention has been given to the power losses in the switching elements of the circuit - Q1 and Q2. Power losses in the high side switch Q1, also called the Control FET, are impacted by the  $R_{ds(on)}$  of the MOSFET, but these conduction losses are only about one half of the total losses.

Power losses in the control switch Q1 are given by;

$$P_{loss} = P_{conduction} + P_{switching} + P_{drive} + P_{output}$$

This can be expanded and approximated by;

$$P_{loss} = (I_{rms}^2 \times R_{ds(on)}) + \left( I \times \frac{Q_{gd}}{i_g} \times V_{in} \times f \right) + \left( I \times \frac{Q_{gs2}}{i_g} \times V_{in} \times f \right) + (Q_g \times V_g \times f) + \left( \frac{Q_{oss}}{2} \times V_{in} \times f \right)$$

This simplified loss equation includes the terms  $Q_{gs2}$  and  $Q_{oss}$  which are new to Power MOSFET data sheets.

$Q_{gs2}$  is a sub element of traditional gate-source charge that is included in all MOSFET data sheets. The importance of splitting this gate-source charge into two sub elements,  $Q_{gs1}$  and  $Q_{gs2}$ , can be seen from Fig 16.

$Q_{gs2}$  indicates the charge that must be supplied by the gate driver between the time that the threshold voltage has been reached and the time the drain current rises to  $I_{dmax}$  at which time the drain voltage begins to change. Minimizing  $Q_{gs2}$  is a critical factor in reducing switching losses in Q1.

$Q_{oss}$  is the charge that must be supplied to the output capacitance of the MOSFET during every switching cycle. Figure A shows how  $Q_{oss}$  is formed by the parallel combination of the voltage dependant (non-linear) capacitance's  $C_{ds}$  and  $C_{dg}$  when multiplied by the power supply input buss voltage.

### Synchronous FET

The power loss equation for Q2 is approximated by;

$$P_{loss} = P_{conduction} + P_{drive} + P_{output}^*$$

$$P_{loss} = (I_{rms}^2 \times R_{ds(on)}) + (Q_g \times V_g \times f) + \left( \frac{Q_{oss}}{2} \times V_{in} \times f \right) + (Q_{rr} \times V_{in} \times f)$$

\*dissipated primarily in Q1.

For the synchronous MOSFET Q2,  $R_{ds(on)}$  is an important characteristic; however, once again the importance of gate charge must not be overlooked since it impacts three critical areas. Under light load the MOSFET must still be turned on and off by the control IC so the gate drive losses become much more significant. Secondly, the output charge  $Q_{oss}$  and reverse recovery charge  $Q_{rr}$  both generate losses that are transferred to Q1 and increase the dissipation in that device. Thirdly, gate charge will impact the MOSFETs' susceptibility to  $Cdv/dt$  turn on.

The drain of Q2 is connected to the switching node of the converter and therefore sees transitions between ground and  $V_{in}$ . As Q1 turns on and off there is a rate of change of drain voltage  $dV/dt$  which is capacitively coupled to the gate of Q2 and can induce a voltage spike on the gate that is sufficient to turn the MOSFET on, resulting in shoot-through current. The ratio of  $Q_{gd}/Q_{gs1}$  must be minimized to reduce the potential for  $Cdv/dt$  turn on.


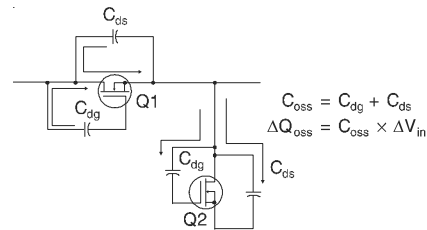




Figure A:  $Q_{oss}$  Characteristic

## SO-8 Package Outline

Dimensions are shown in millimeters (inches)

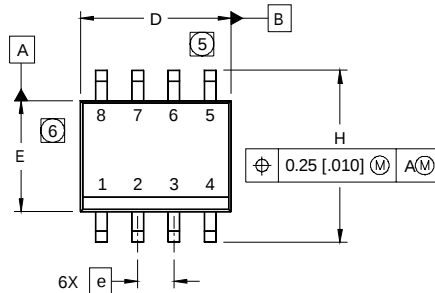


| DIM | INCHES     |       | MILLIMETERS |      |
|-----|------------|-------|-------------|------|
|     | MIN        | MAX   | MIN         | MAX  |
| A   | .0532      | .0688 | 1.35        | 1.75 |
| A1  | .0040      | .0098 | 0.10        | 0.25 |
| b   | .013       | .020  | 0.33        | 0.51 |
| c   | .0075      | .0098 | 0.19        | 0.25 |
| D   | .189       | .1968 | 4.80        | 5.00 |
| E   | .1497      | .1574 | 3.80        | 4.00 |
| e   | .050 BASIC |       | 1.27 BASIC  |      |
| e1  | .025 BASIC |       | 0.635 BASIC |      |
| H   | .2284      | .2440 | 5.80        | 6.20 |
| K   | .0099      | .0196 | 0.25        | 0.50 |
| L   | .016       | .050  | 0.40        | 1.27 |
| y   | 0°         | 8°    | 0°          | 8°   |

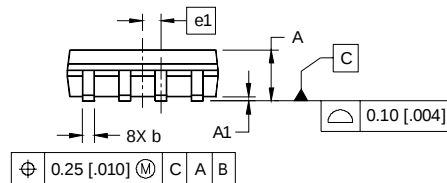

### NOTES:


1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [0.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [0.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

### FOOTPRINT

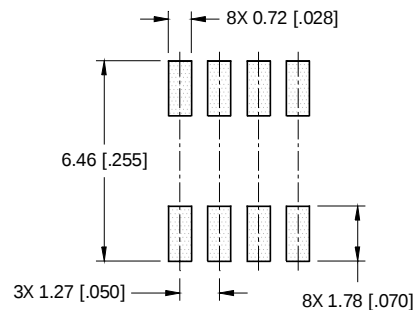

## SO-8 Part Marking

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

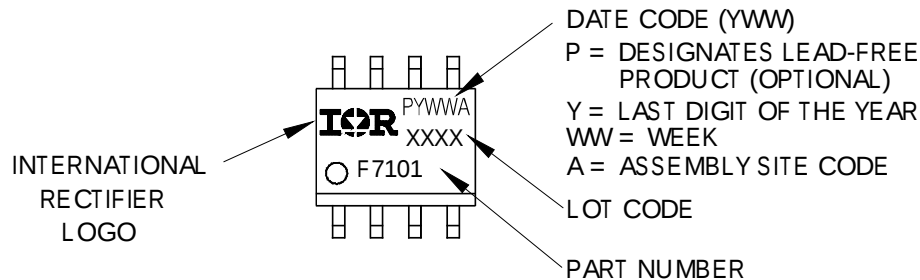


# IRF3717PbF

## SO-8 Tape and Reel


Dimensions are shown in millimeters (inches)

International  
**IR** Rectifier

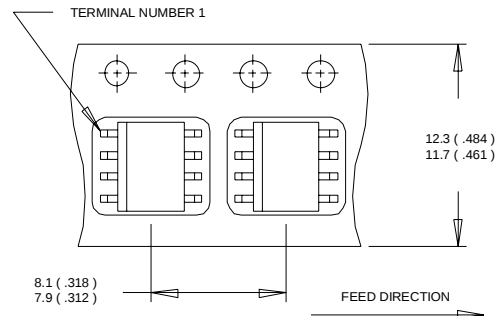

**NOTES:**

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

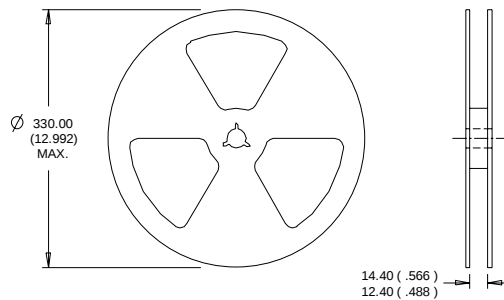

**NOTES:**

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

**Notes:**

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.26\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 16\text{A}$ .
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④ When mounted on 1 inch square copper board.

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualifications Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.08/04

[www.irf.com](http://www.irf.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331