Low Profile Metallic Foam Heat Sinks

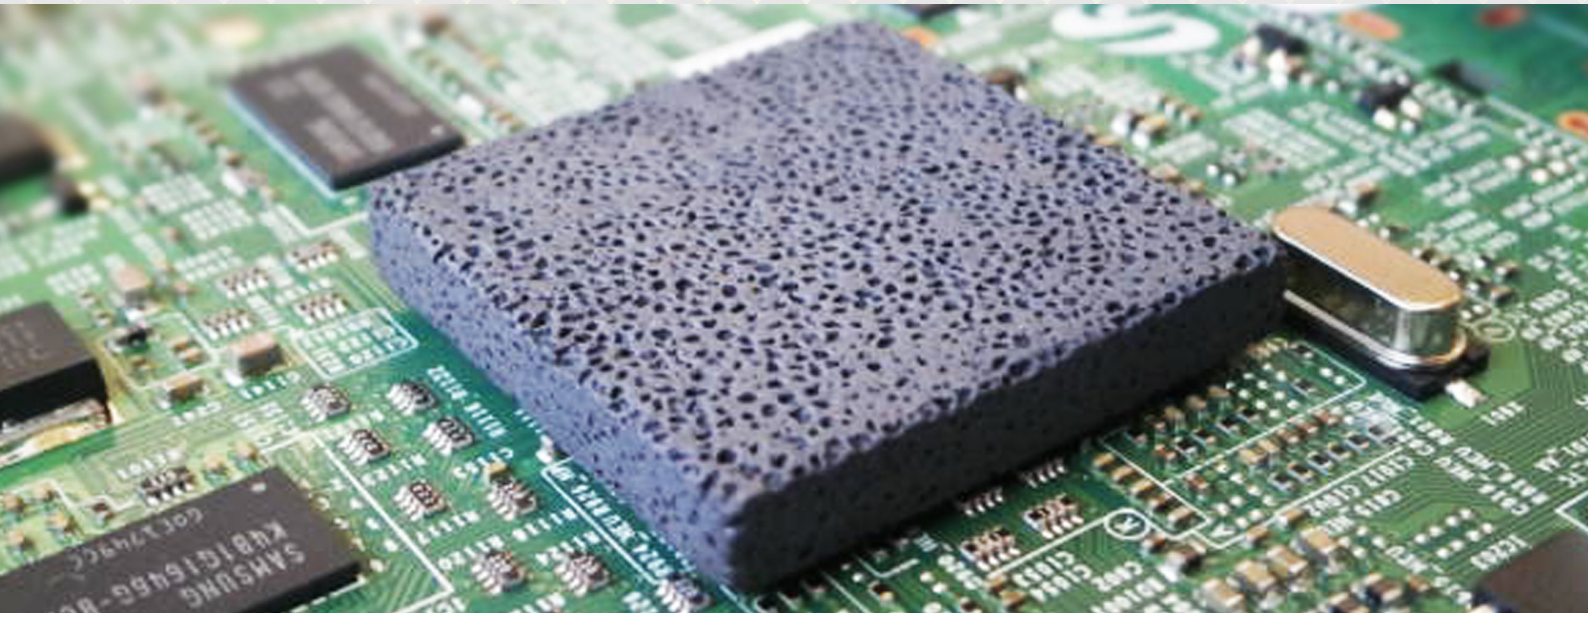

Introducing the next generation of low profile heat sinks from Versarien Technologies.

Using the incredible new material VersarienCu™, a micro-porous metallic copper foam, Versarien's heat sinks offer unparalleled thermal performance in low profile applications.

The large surface area created by the interconnected pores of the foam coupled with the excellent thermal conductivity of copper allows for the height of your heat sinks to be reduced, without sacrificing performance.

The copper foam is coated with a thin, hard layer of high temperature copper oxide that improves the emissivity of the foam to improve its radiant properties and reduce the temperature of your component.

This range is designed for use in passive cooling applications where space is at a premium and performance is crucial. VersarienCu™ heat sinks can be used to cool any IC component.

Contact us today to find out more

Versarien® TECHNOLOGIES

e: sales@versarien.com
t: +44 (0) 1594 888 622
w: www.versarien-technologies.co.uk

Versarien Technologies Limited | Company No: 07475659
Registered Office: Building 4, Vantage Point Business Village, Mitcheldean, Gloucestershire, GL17 0DD, UK
VAT Registration No: 122 6395 26

© 2015 Versarien Technologies Low Profile Heatsinks Rev 02 -10-03-2015

Low Profile Metallic Foam Heat Sinks

PRODUCT	POWER IC	HIGH TEMP. COMPONENT	TRANSISTOR	STB	AP ROUTER	G PON	CABLE MODEM	BROADBAND	VOIP	LED TV	LED TV (SCALAR IC)
LPH0001 10x10x2	●	●	●								
LPH0002 15x15x2	●	●	●								
LPH0003 20x20x2.5	●	●	●	●	●	●	●	●		●	
LPH0004 20x20x5	●	●	●	●	●	●	●	●		●	
LPH0005 25x25x2.5				●	●	●	●	●		●	
LPH0006 25x25x5				●	●	●	●	●		●	
LPH0007 30x30x2.5				●	●		●	●	●		
LPH0008 30x30x5				●	●		●	●			●
LPH0009 40x40x2.5				●	●		●	●			●
LPH0010 40x40x5				●	●		●	●			●

Performance Testing of 40X40 Low Profile Heat Sinks

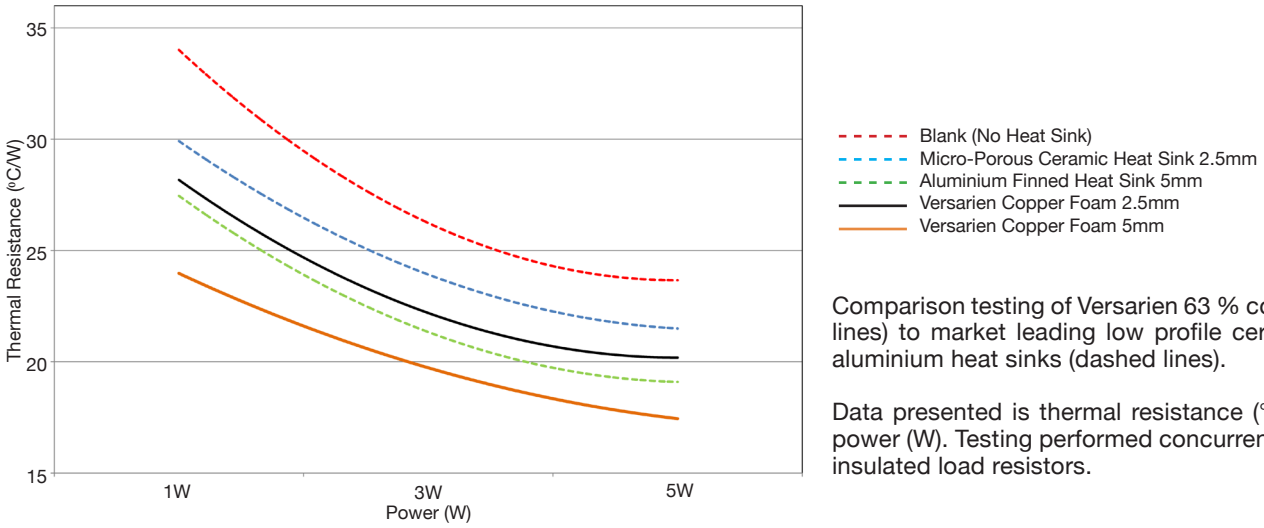

Comparison testing of Versarien 63 % copper foam (solid lines) to market leading low profile ceramic and finned aluminium heat sinks (dashed lines).

Data presented is thermal resistance (°C/W) vs applied power (W). Testing performed concurrently in still air with insulated load resistors.

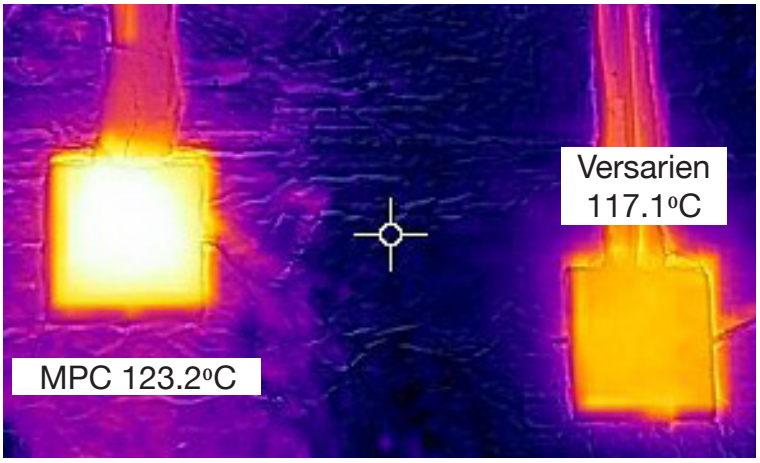

Comparative heatmap of a 40x40x2.5 microporous ceramic and VersarienCu™ heat sink at 5W. The Versarien heat sink is 6.1°C/W cooler.

At an applied load of 5W the thermal resistance of a 40x40x5 (mm) Versarien heat sink is 17.4 °C/W

At an applied load of 2W the thermal resistance of a 20x20x5 (mm) Versarien heat sink is 35.8 °C/W

Contact us today to find out more

Versarien® TECHNOLOGIES

e: sales@versarien.com
t: +44 (0) 1594 888 622
w: www.versarien-technologies.co.uk

Versarien Technologies Limited | Company No: 07475659
Registered Office: Building 4, Vantage Point Business Village, Mitcheldean, Gloucestershire, GL17 0DD, UK
VAT Registration No: 122 6395 26

© 2015 Versarien Technologies Low Profile Heatsinks Rev 02 -10-03-2015

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331