


BATTERY "FUEL" GAGE

MODEL 900R



CURTIS

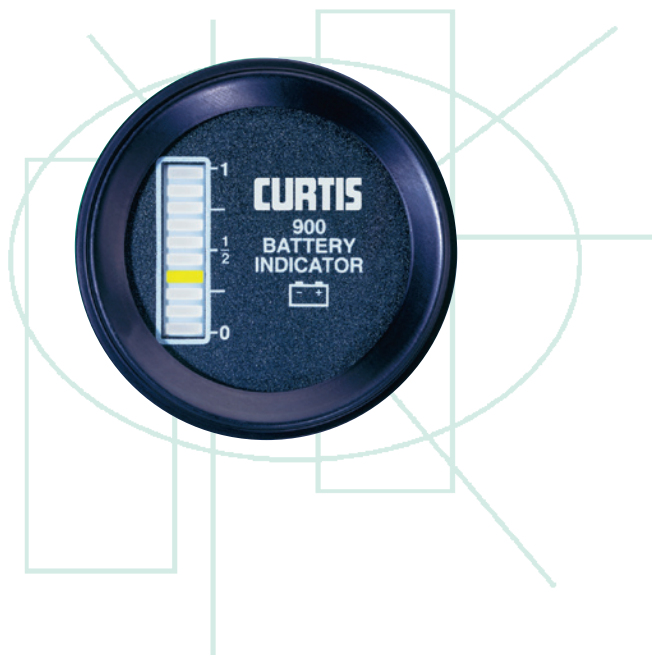

DESCRIPTION

The Curtis Model 900R battery "fuel" gauge is inexpensive and easy to install. It is a single piece package and installs via a simple 2 wire connection.

APPLICATION

Model 900R is ideally suited for lead acid battery-powered vehicles that require a display of state-of-charge only. The H reset profile is recommended for industrial/recreational vehicles that remain connected to their batteries during the charge cycle. The B reset profile is recommended for electric fork lift trucks and electric vehicles that can be disconnected from or remain connected to their batteries during the charge cycle. Units so configured have an undefeatable memory that holds the state of charge of the battery when disconnected.

FEATURES

- Multicolored 10-bar (5 green, 3 yellow, 2 red) LED displays state of charge.
- The top LED illuminates only when the battery is properly charged.
- Double flashing red LEDs signal "empty" alarm at 80% discharge.
- Recognizes improperly charged battery.
- Both fixed and adjustable discharge profiles are available.
- Easy to install.

SYSTEM VOLTAGES


- Available in single voltages from 12, 24, 36, 48, 72 and 80 VDC.

SPECIFICATIONS

- Operating Temperature:
-40 to +80° C
- Humidity:
95% RH (non-condensing) at 38° C
- Storage temperature:
-50 to +90° C
- Vibration:
Meets SAE J1378
- Shock & Vibration:
Meets SAE J1378

MODEL 900R

DIMENSIONS mm

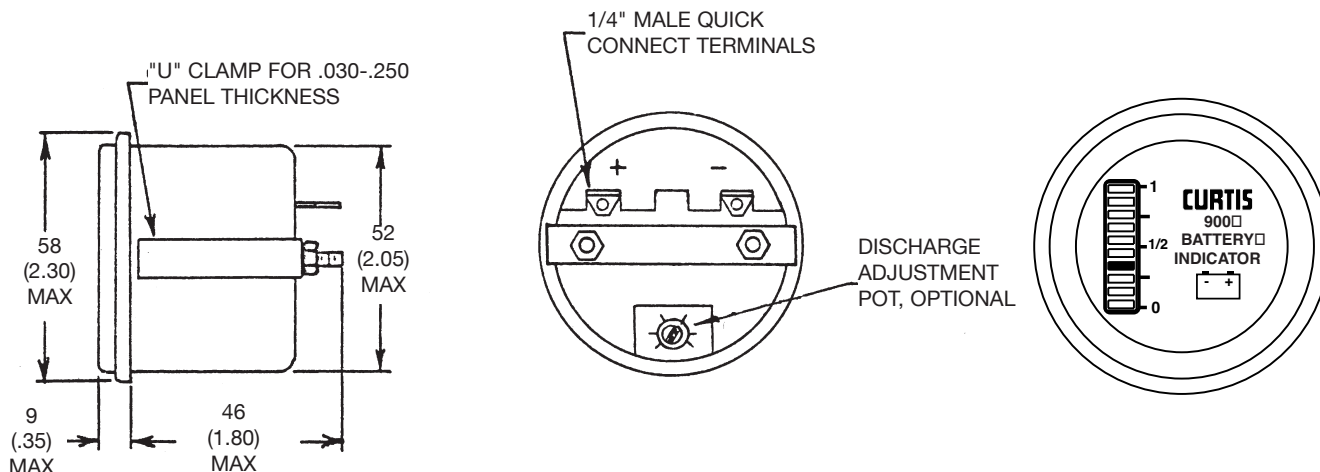

INSTALLATION

CURTIS 900R "Fuel" Gauge positive (+) terminal to battery positive (+) bus; gauge negative (-) terminal to battery negative (-) bus.

MODEL ENCODEMENT

900R	B	24	B	N	A	A	O
	Bezel B=Black No B=Stainless	VOLTAGE 12, 24, 36, 48 72, 80 VDC	MEMORY/RESET LEVEL B - with memory, HVR* & OCR** H - no memory, HVR* only	DISCHARGE PROFILE Full (v/c) Empty (v/c) G = 1.97 1.75 N = 2.04 1.73 W = 2.02 1.85 A = Adjustable; range of 1.56 to 1.82 v/c at empty B = Light duty adjustable; range of 1.71 to 1.93 v/c at empty	OPTION A = no option	OPTION A = no option	OEM CODE O = CURTIS logo

* HVR: High Voltage Reset – Battery is connected to gauge while recharging. The gauge resets to Full when the battery is above the HVR level for 6 minutes. With B or H, HVR = 2.35v/c.

**OCR: Open Circuit Reset – 2.09 v/c – Only available on units with Memory – Battery is disconnected from gauge while recharging. The gauge will reset to Full if the reconnected battery is above the OCR level. The gauge will display its stored state-of-charge if the battery is below this level. With B,, OCR = 2.09 v/c.

WARRANTY Two year limited warranty from time of delivery.





**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331