



DRAWING FOR REFERENCE: This is subject to change without notice
12/05/2013

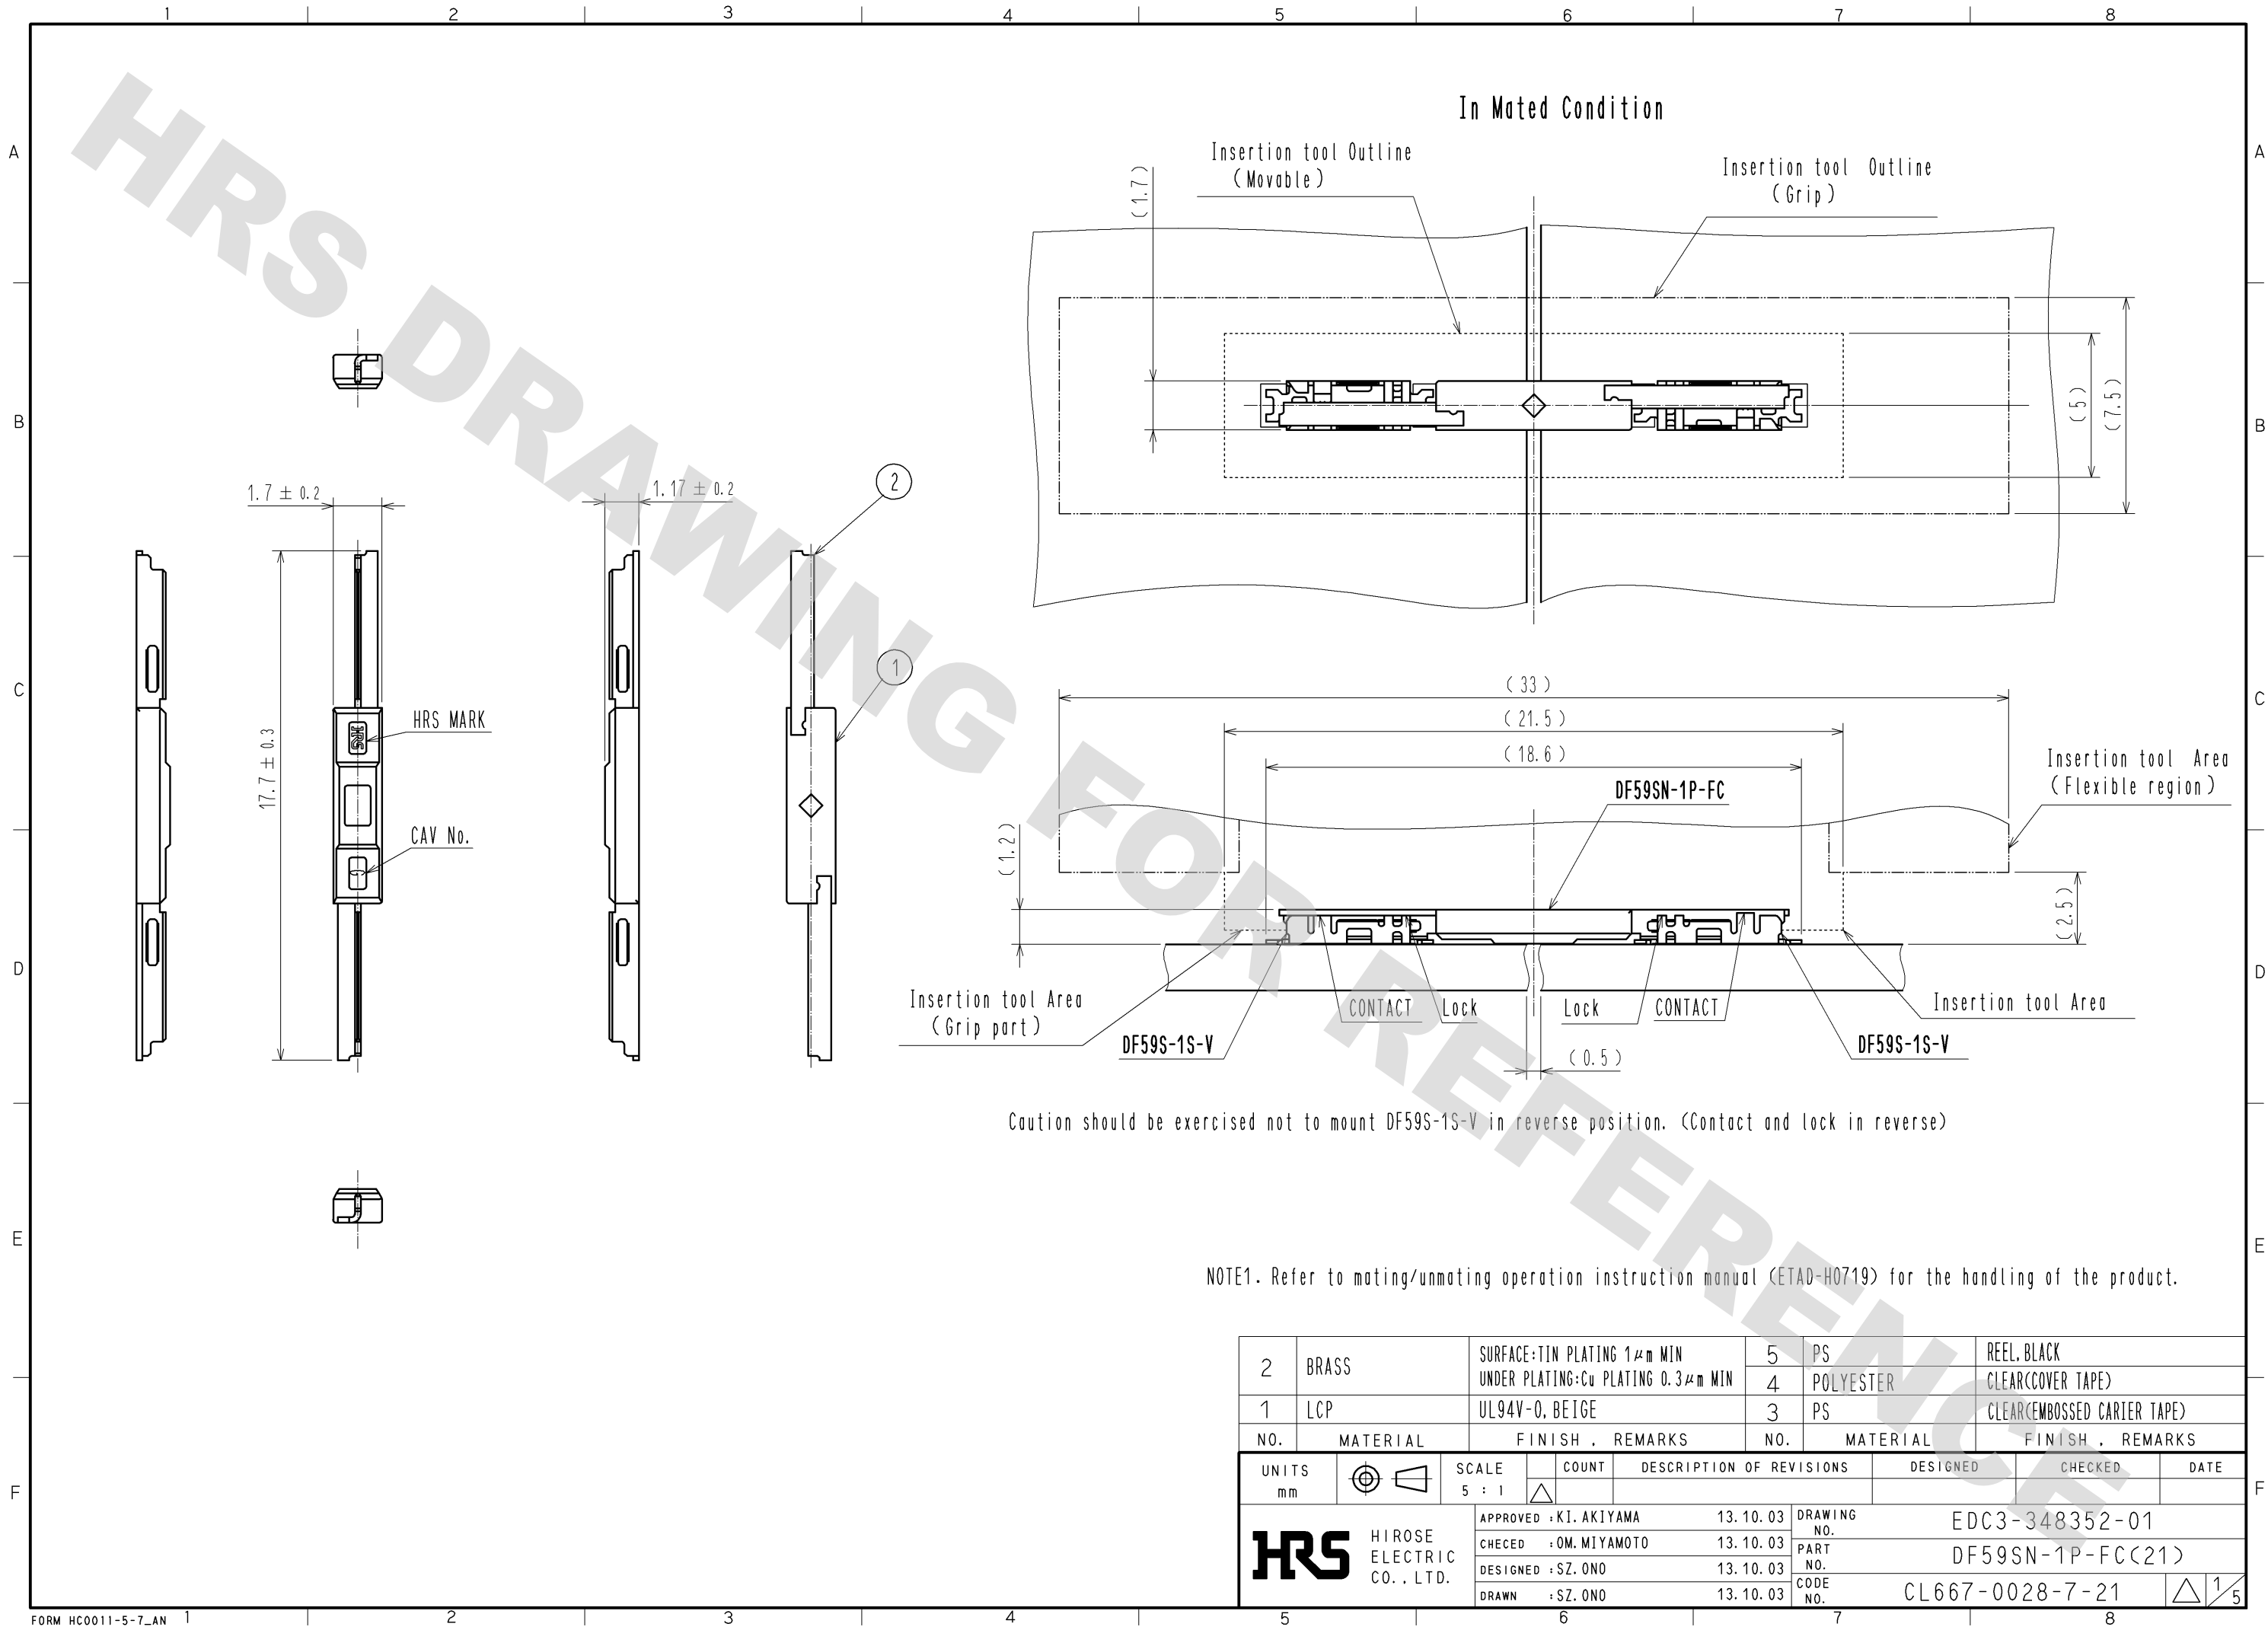

DRAWING FOR REFERENCE: This is subject to change without notice
12/05/2013

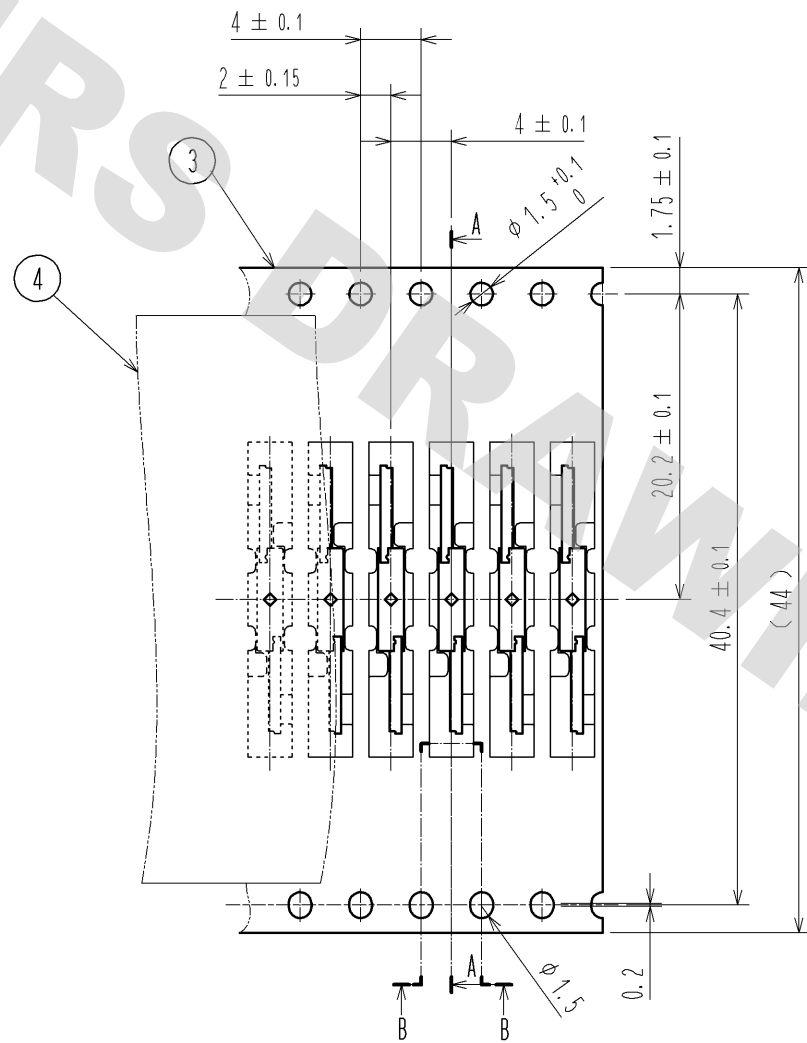


B-B(2:1)




Unreeling direction →

Taping(Free)

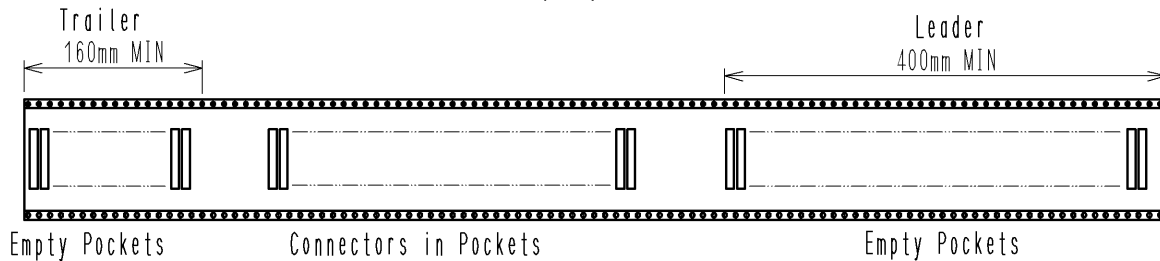

NOTE2. 1Reel:10000 Connectors.
3. The dimensions in parentheses are for reference.

Reel style and Dimensions (Free)

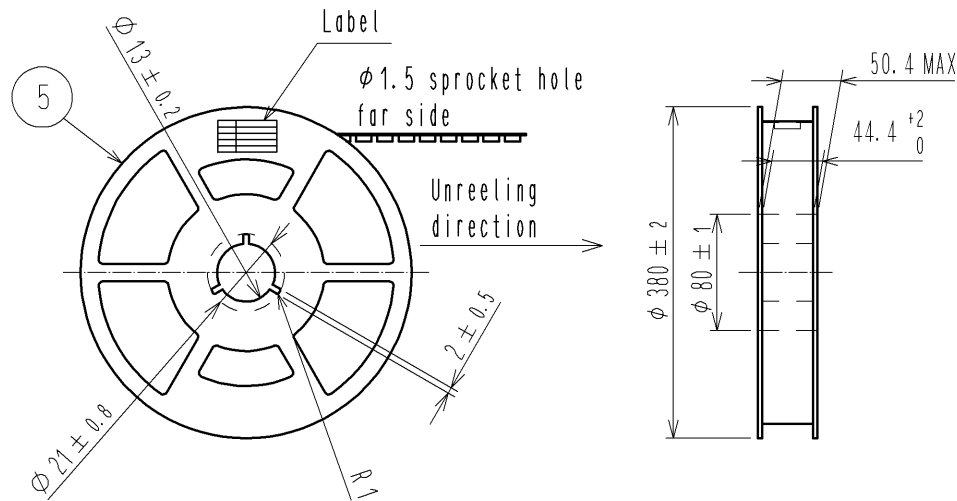

Detail of Part no. Label

生産月日	年 月 日
図 番	CL667-0028-7-21
品 名	DF59SN-1P-FC(21)
納入数量	10000 K0
納入者	ヒロセ電機(株)

HRS

DRAWING NO. EDC3-348352-01
PART NO. DF59SN-1P-FC(21)
CODE NO. CL667-0028-7-21

△ 2/5

DF59S Operation Procedures for Floating Socket




«Mating»

<How to pick up the socket>

Pick up the socket from a reel pocket with the insertion tool (DF59SN-1P-FC/IN-T00L).

1. Align the insertion tool to the pocket by using positioning guides.

2. Press down the insertion tool to the socket in the pocket vertically and lift it up, then the socket is captured into the insertion tool.

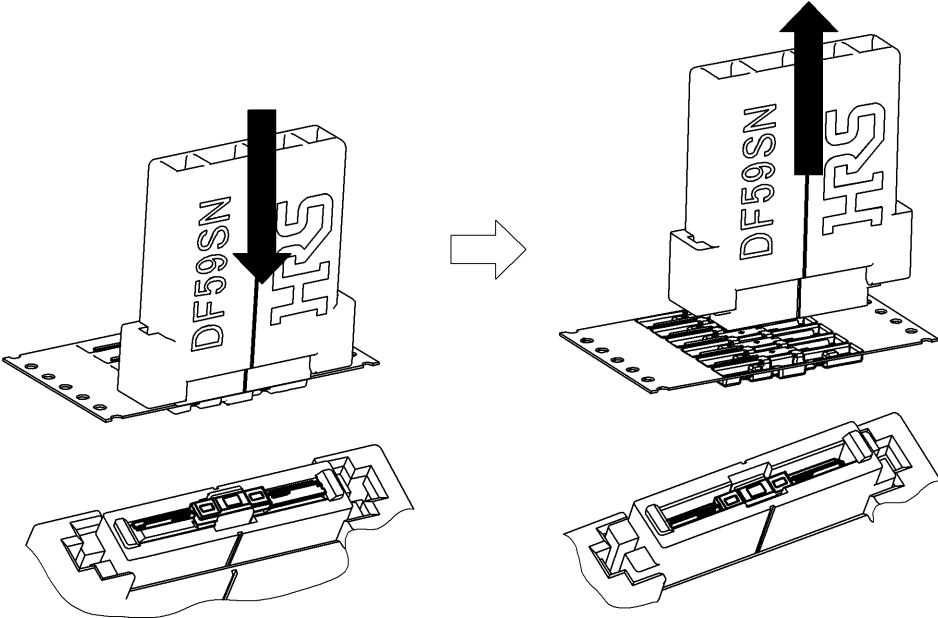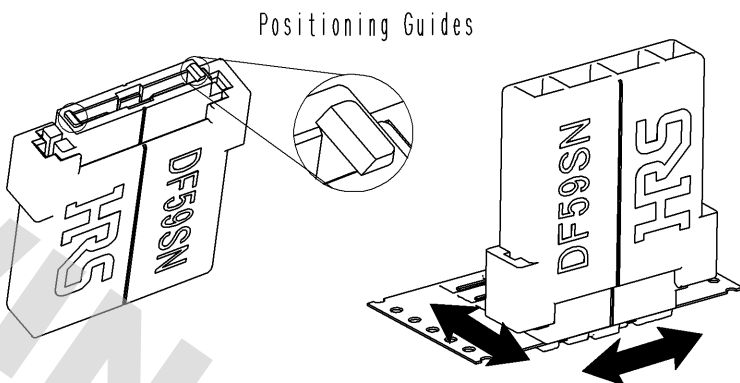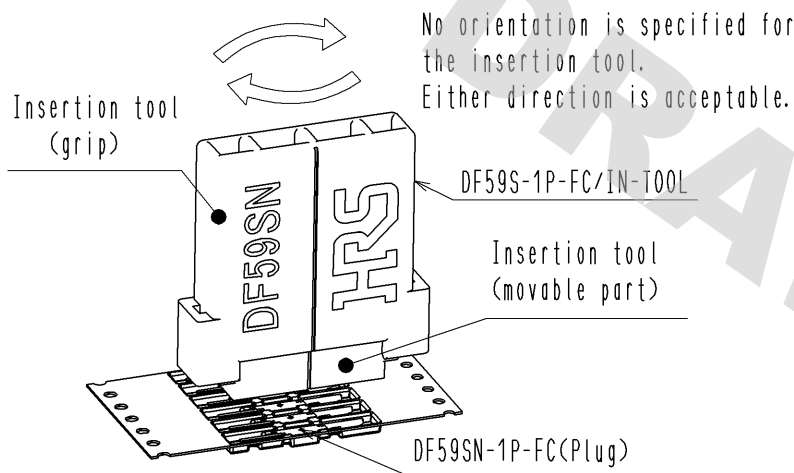




<How to mate the socket to the receptacle>

Mate the socket captured by the insertion tool to the receptacles.

3. Align the insertion tool to receptacles by using positioning guides.

※Align the center line of insertion tool to the center between PCBs.


4. Press straight down the insertion tool to the receptacles (PCBs), and lift it up.

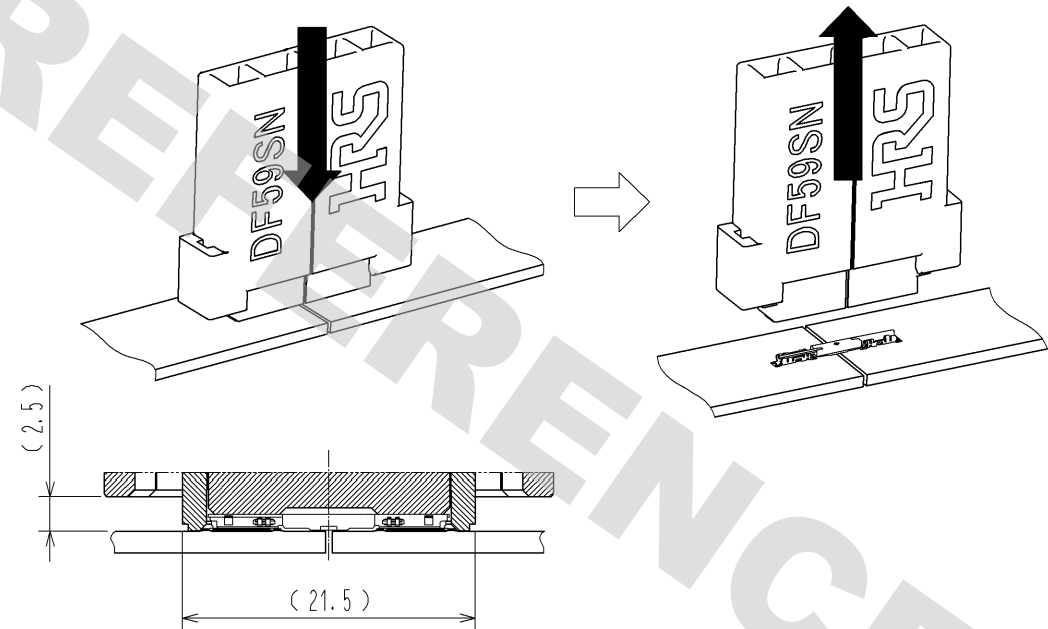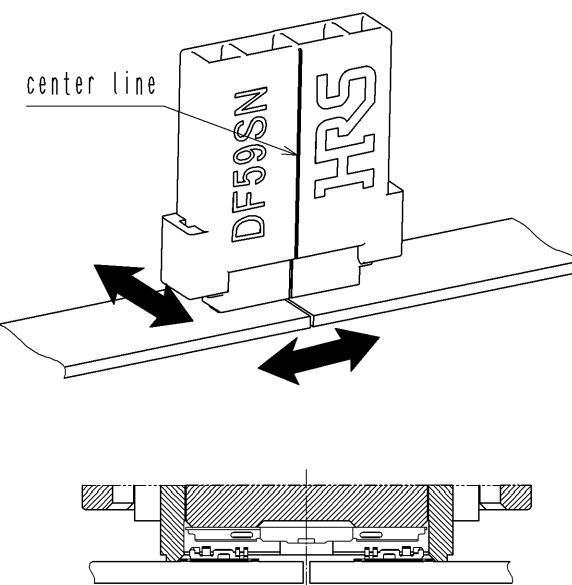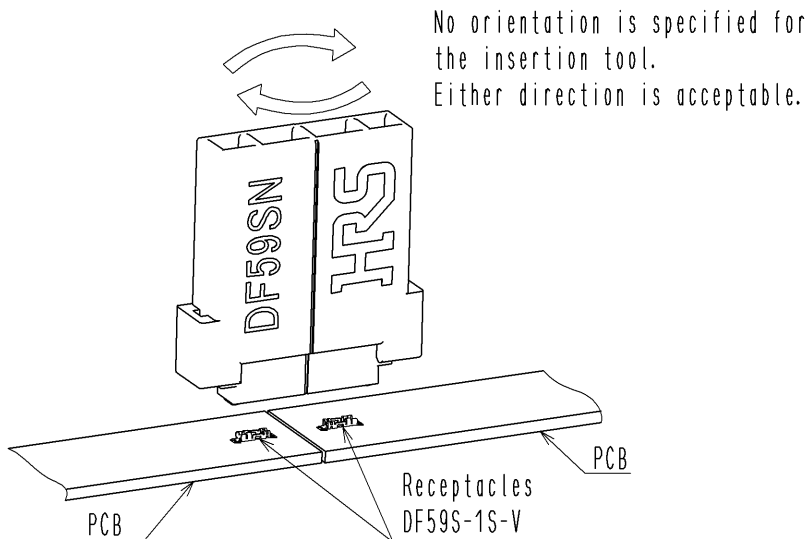


HRS	DRAWING NO.	EDC3-348352-01
	PART NO.	DF59SN-1P-FC(21)
	CODE NO.	CL667-0028-7-21
		3/5

《Unmating》

1. Hook the lever on either sides of floating socket with finger and lift up to the upper direction for unlock.
(Lift up until friction lock is released.)

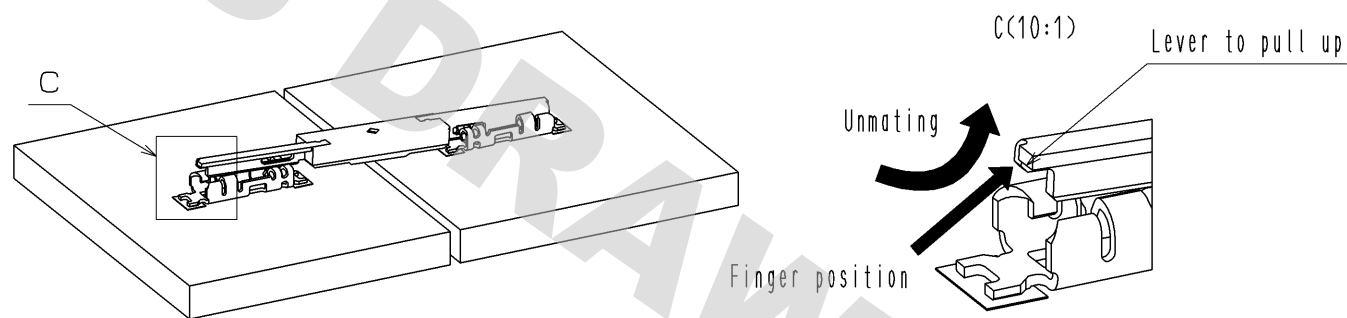


2. After releasing either side, hook the lever on the other side with a finger and lift up to the upper direction, too.

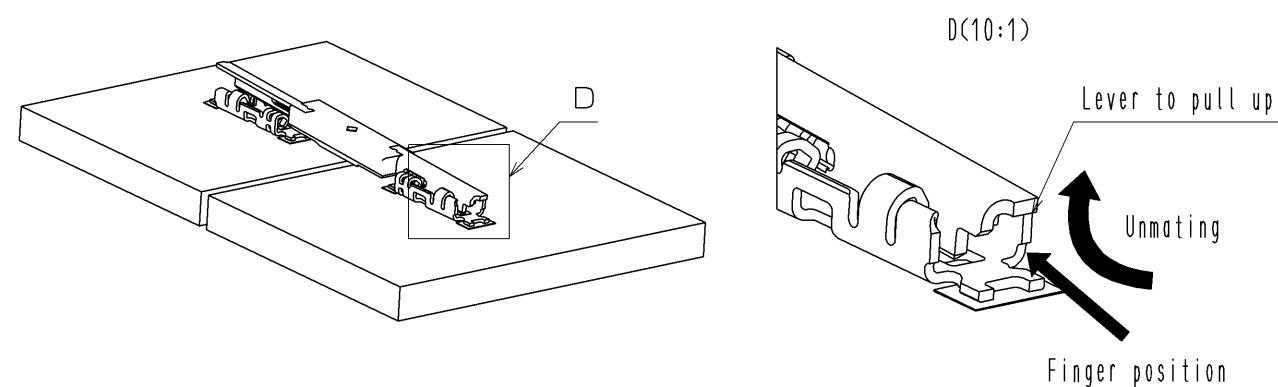


Withdrawal tool is also available, and its operation is the same as in case of using finger.

1. Hook the lever on either sides of the socket with the hook portion of the withdrawal tool, and lift it up straight to the upper direction for unlock.
(Lift up until friction lock is released.)

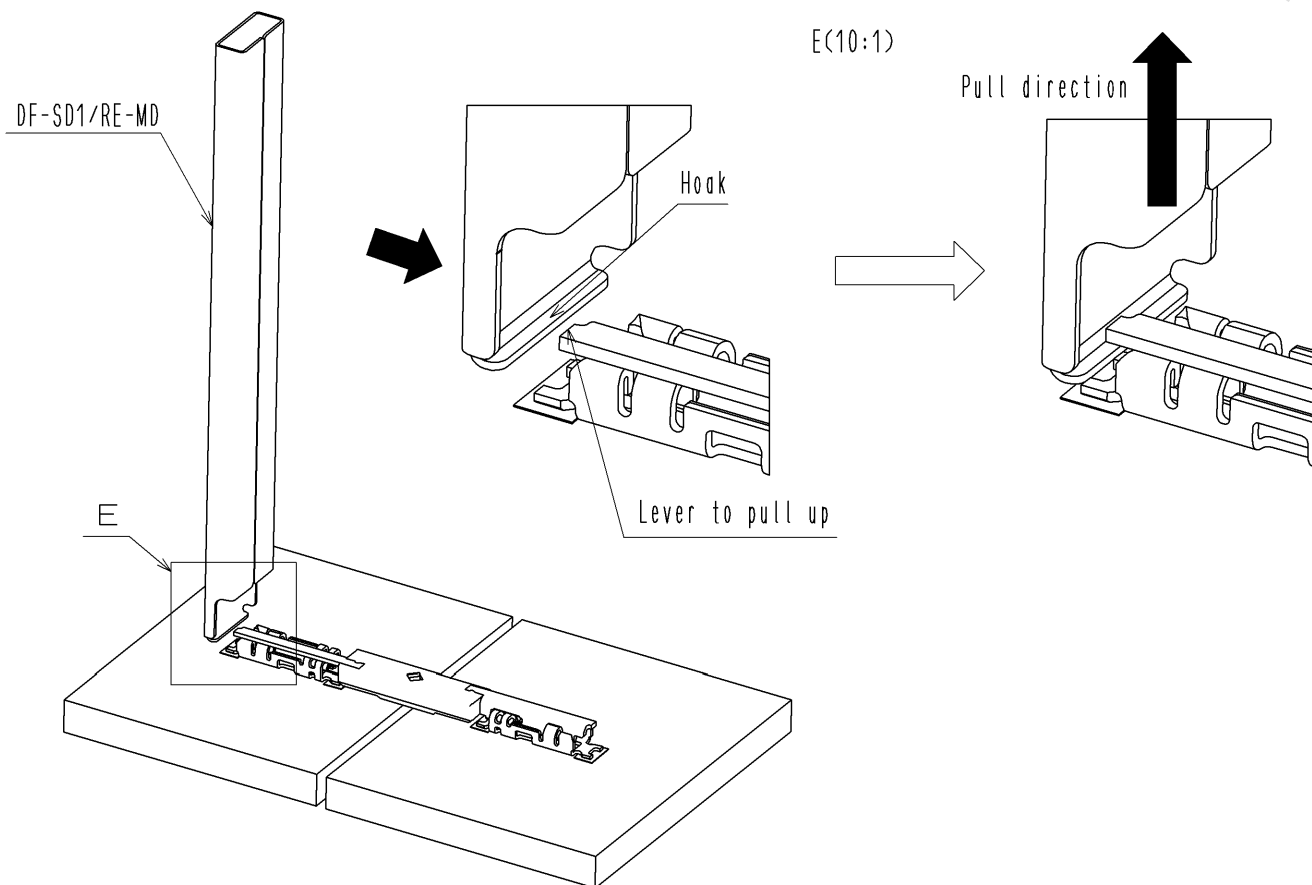

2. After releasing either side, hook the lever on the other side with the withdrawal tool and lift up to the upper direction, too.

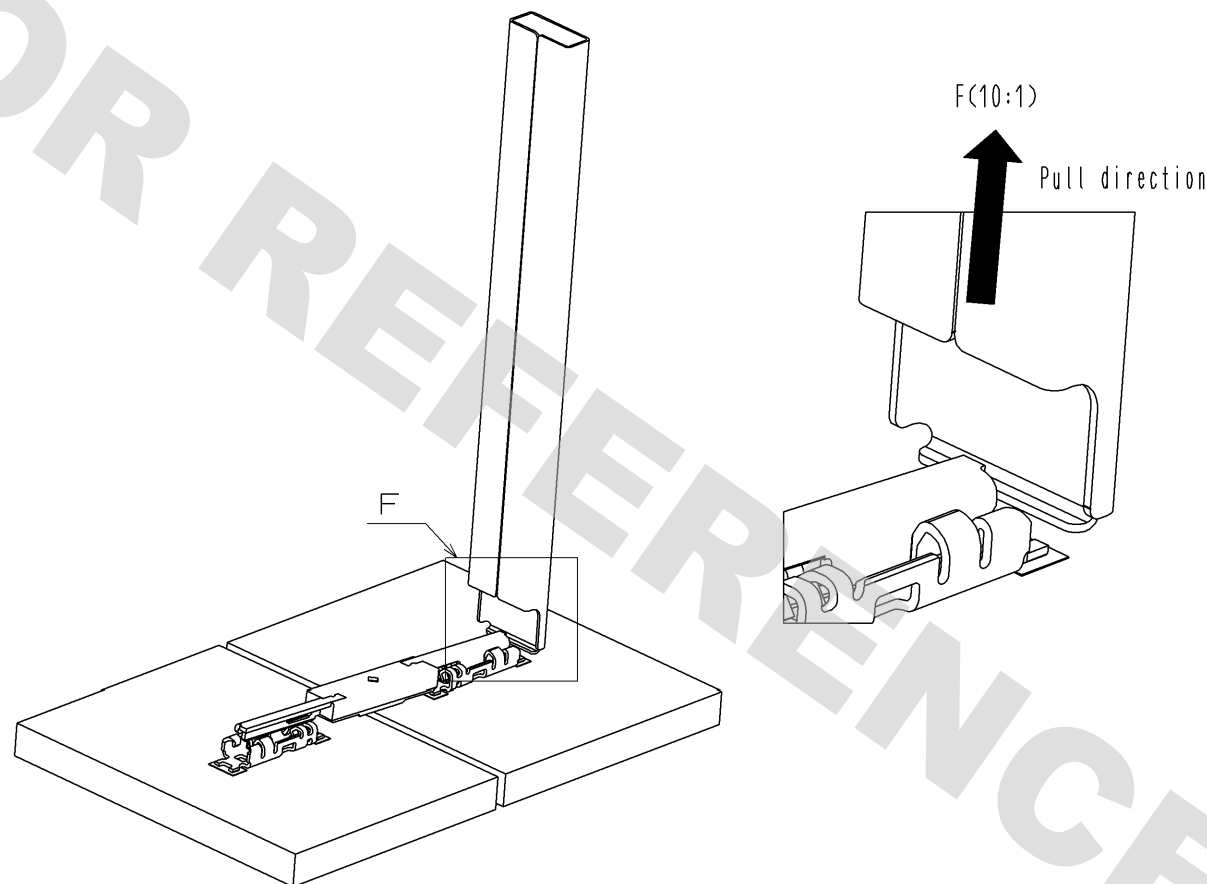

HRS

DRAWING NO.	EDC3-348352-01
PART NO.	DF59SN-1P-FCC(21)
CODE NO.	CL667-0028-7-21

DRAWING FOR REFERENCE: This is subject to change without notice
12/05/2013

Floating Range of DF59SN

Follow the specified floating range as shown below.




《Direction of X axis》

Floating range in X direction

■ Floating in X direction : +0.5mm

■ Standard Position

■ Direction of X axis floating : -0.5mm

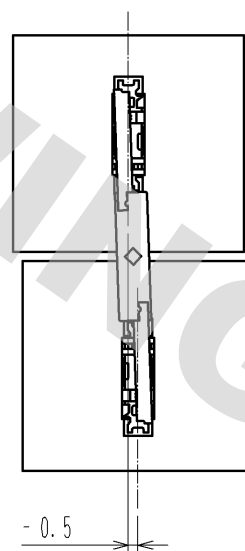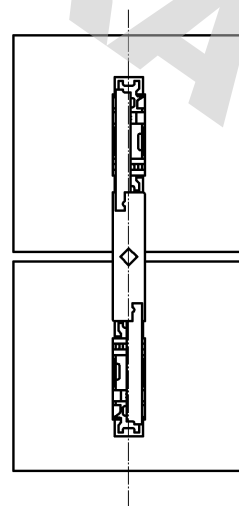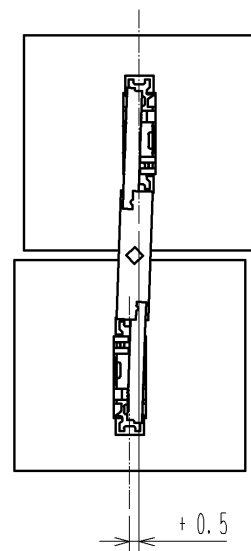




《Direction of Y axis》

Floating range in Y direction

■ Floating in Y direction : +0.5mm

■ Standard Position

■ Direction of Y axis floating : -0.5mm

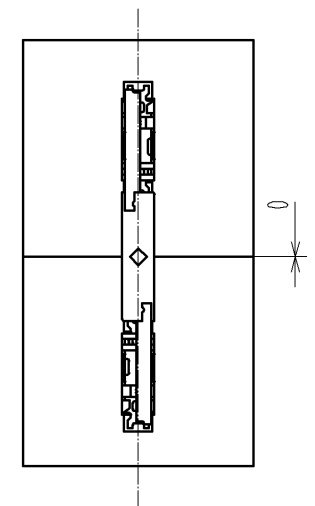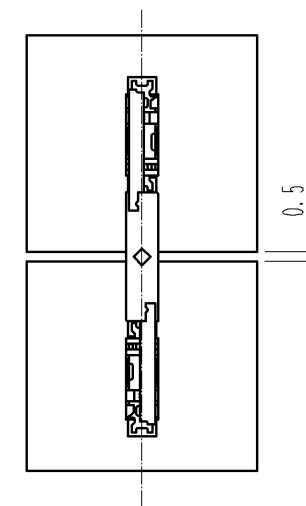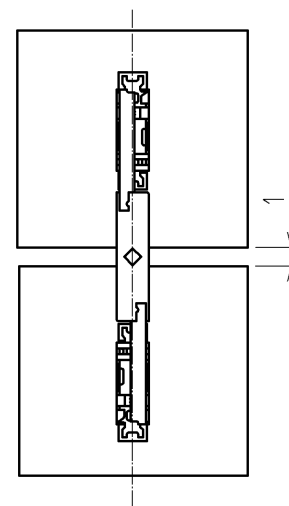



《Direction of Z axis》

Floating range in Z direction

■ Floating in Z direction : +0.2mm

■ Standard Position

■ Direction of Z axis floating : -0.2mm

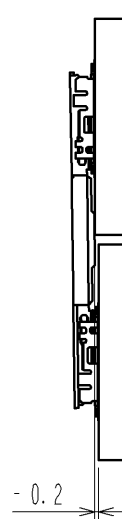

HRS

DRAWING NO.	EDC3-348352-01
PART NO.	DF59SN-1P-FC(21)
CODE NO.	CL667-0028-7-21

5/5



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331