

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1904

UNIVERSAL DUAL-BATTERY CHARGER/SELECTOR

LTC1960

DESCRIPTION

Demonstration circuit 1904 is a dual battery PowerPath™ and charger controller featuring the LTC1960. The input voltage is 15V to 20V. The charger output voltage is programmed via SPI serial interface. The maximum charge current is 4A. The demo board has been optimized to work with 3- and 4-cell Li-ion batteries. A jumper is provided to select the LowBatt voltage trip point. The board will not charge any battery without a device to program it. By default the board powers up in 3-Diode mode, which simply means all three power paths to the output (load) are on.

PowerPath selection is programmed over the SPI interface.

This is not a stand-alone demonstration circuit—an SPI interface and associated software is required for proper evaluation. Linear Technology offers demonstration circuit 1223A-B, which includes an SPI-to-USB-port adapter and software to control demonstration circuit 1904.

Design files for this circuit board are available. Call the LTC factory.

LTC is a registered trademark of Linear Technology Corporation.

Table 1. Performance Summary

PARAMETER	CONDITION	VALUE
Maximum Input Voltage	Limited by input Capacitor Volt Ratings	20V $\pm$ 10 %
Recommended Minimum Input Voltage		15V $\pm$ 10 %
Low Battery Voltage trip point at full discharge	0% capacity voltage. Set by DCLOW TRIP Jumper	>7.9 for 3 cell Li-ion >11V for 4 cell Li-ion
Input Trip Voltage	Set by DCDIV divider network.	13V $\pm$ 3%
Maximum Charge Current	Vin > VBATmax > 6V	4A $\pm$ 5% Settable to 1, 2 and 3 amps.
Short Circuit Shutdown Trip Current	Static Load T > 15ms	8.33A $\pm$ 5%
Input Current Limit	IBAT + ILOAD	3.57A $\pm$ 5%

QUICK START PROCEDURE


Demonstration circuit 1904 is easy to set up to evaluate the performance of the LTC1960. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Connect the input power source to DCIN terminals J1 or TP1 and TP3 using a power supply capable of handling 4A of current within a 15V to 20V range.
2. Connect the load to DCOUT terminals TP2 and TP4.
3. Turn on the input power supply.
4. Attach one or two batteries to the BATTERY 1 or BATTERY 2 terminals or both. Industry standard 5-pin AMP Smart Battery connectors are provided as well as test points for hardwire.

NOTE: The input supply *must* be greater than the full voltage value of the battery to allow a full charge to take place.


5. Program the LTC1960.

NOTE: OPTIONALLY use the DC1223A-B demonstration software to control and configure DC1904.

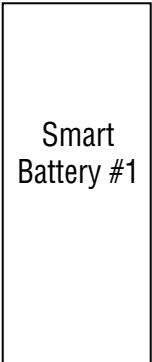

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1904

UNIVERSAL DUAL-BATTERY CHARGER/SELECTOR

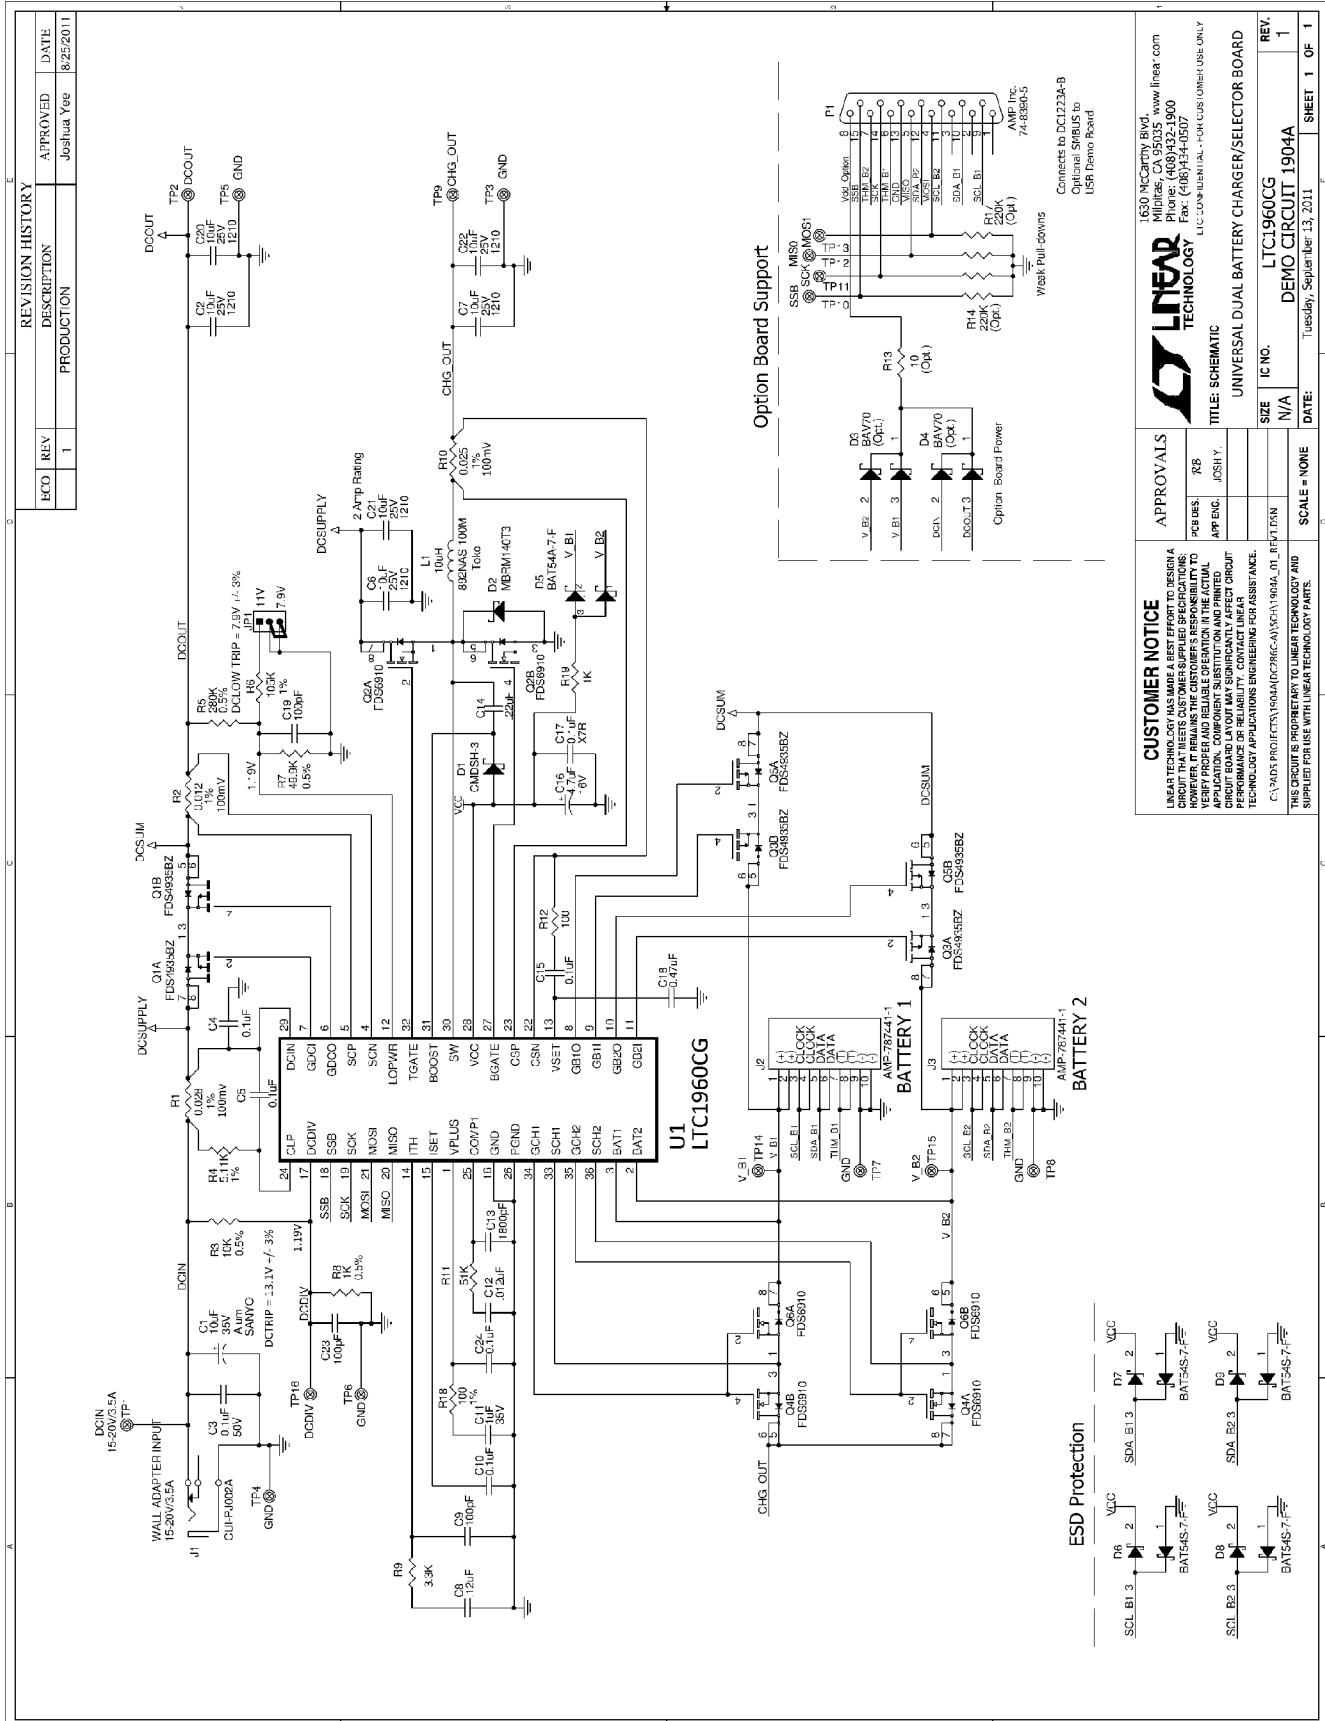

REVISION HISTORY		APPROVED	DATE
ECO	REV	DESCRIPTION	
1	1	PRODUCTION	8/25/2011

APPROVALS		APPROVED	DATE
DESIGN	TEST		
JDSH	JDSH		

TITLE: SCHEMATIC		IC NO.	REV.
UNIVERSAL DUAL BATTERY CHARGER/SELECTOR BOARD		N/A	1
LTC1960CG		DEMO CIRCUIT 1904A	1
DATE: Tuesday, September 13, 2011		SHEET 1 OF 1	

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. LINEAR TECHNOLOGY DOES NOT WARRANT THE ACCURACY OF THE CIRCUIT OR THE RESULTS OF THE CIRCUIT. THE CIRCUIT IS PROVIDED AS A GUIDE ONLY. THE CIRCUIT IS NOT TO BE USED IN ANY APPLICATION WHERE THE FAILURE OF THE CIRCUIT COULD CAUSE PERSONAL INJURY, DEATH, OR PROPERTY DAMAGE. THE CIRCUIT IS NOT TO BE USED IN ANY APPLICATION WHERE THE FAILURE OF THE CIRCUIT COULD CAUSE PERSONAL INJURY, DEATH, OR PROPERTY DAMAGE. THE CIRCUIT IS NOT TO BE USED IN ANY APPLICATION WHERE THE FAILURE OF THE CIRCUIT COULD CAUSE PERSONAL INJURY, DEATH, OR PROPERTY DAMAGE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331