

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 841

CONSTANT CURRENT BOOST CONVERTER WITH INPUT CURRENT AND OUTPUT VOLTAGE PROTECTION

LT3477

DESCRIPTION

Demonstration circuit 841 is a constant LED current boost converter with input current and output voltage protection featuring the LT[®]3477. The board is optimized to drive 330mA LED arrays with a total LED voltage between the maximum input voltage and 36V. The high input voltage range, high-efficiency low-side internal 3A NPN power switch, two floating current sense amplifiers and overvoltage/voltage feedback amplifier, shutdown control pin, Iadj LED current dimming control, externally programmable switching frequency and soft-start capacitor make the LT3477 an extremely powerful and versatile LED driving IC.

DC841 has overvoltage protection below 36V if the LEDs are open or not properly attached to the terminals on the PCB. The shutdown function is activated by pulling the shutdown terminal to ground, but in shutdown the boost configuration allows the input voltage to be seen on the output and if the attached LED array leaks current at the input voltage, the LEDs may not completely turn off in shutdown although IC switching has ceased. The Iadj terminals can be used to dim the LED current. In order to activate the Iadj terminals, the resistors shorting the Iadj pins to VIN

must be removed and the resistors between the Iadj terminals and pins must be stuffed.

A few simple modifications can be made to DC841 in order to convert the board from a boost converter to a buck converter or any type of step-up and step-down converter. Please consult the datasheet for schematic details and the factory for customization details.

The LT3477 datasheet gives a complete description of the part, operation and applications information. The datasheet must be read in conjunction with this Quick Start Guide for demonstration circuit 841. The LT3477 is assembled in a small 20-lead plastic TSSOP FE package with a thermally enhanced ground pad. Proper board layout is essential for maximum thermal performance. See the datasheet section 'Layout Considerations'.

Design files for this circuit board are available. Call the LTC factory.

LT is a trademark of Linear Technology Corporation

QUICK START PROCEDURE

Demonstration circuit 841 is easy to set up to evaluate the performance of the LT3477. Follow the procedure below:


NOTE: Make sure that the input voltage does not exceed 16V.

1. Connect an array of LEDs with forward voltage less than 36V, but greater than the input voltage, to the LED+ and LED- terminals on the PCB as shown.

2. Connect a 2.7V to 16V input power supply to the VIN and GND terminals on the PCB and observe the bright LEDs and the constant LED current.


QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 841

CONSTANT CURRENT BOOST CONVERTER WITH INPUT CURRENT AND OUTPUT VOLTAGE PROTECTION

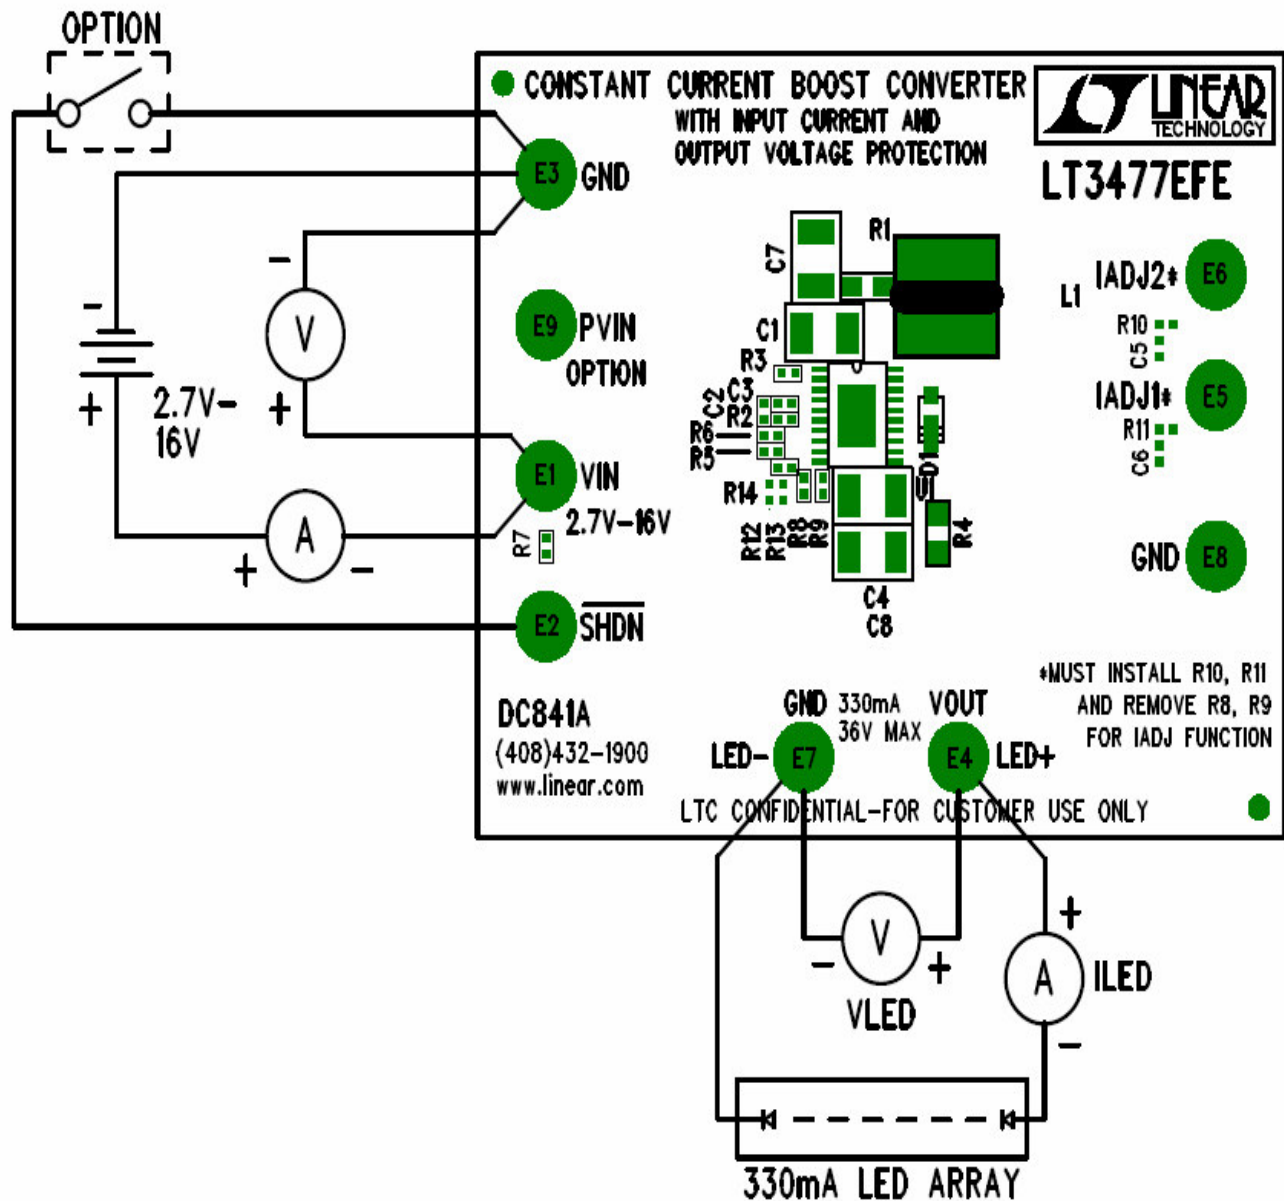

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 841

CONSTANT CURRENT BOOST CONVERTER WITH INPUT CURRENT AND OUTPUT VOLTAGE PROTECTION

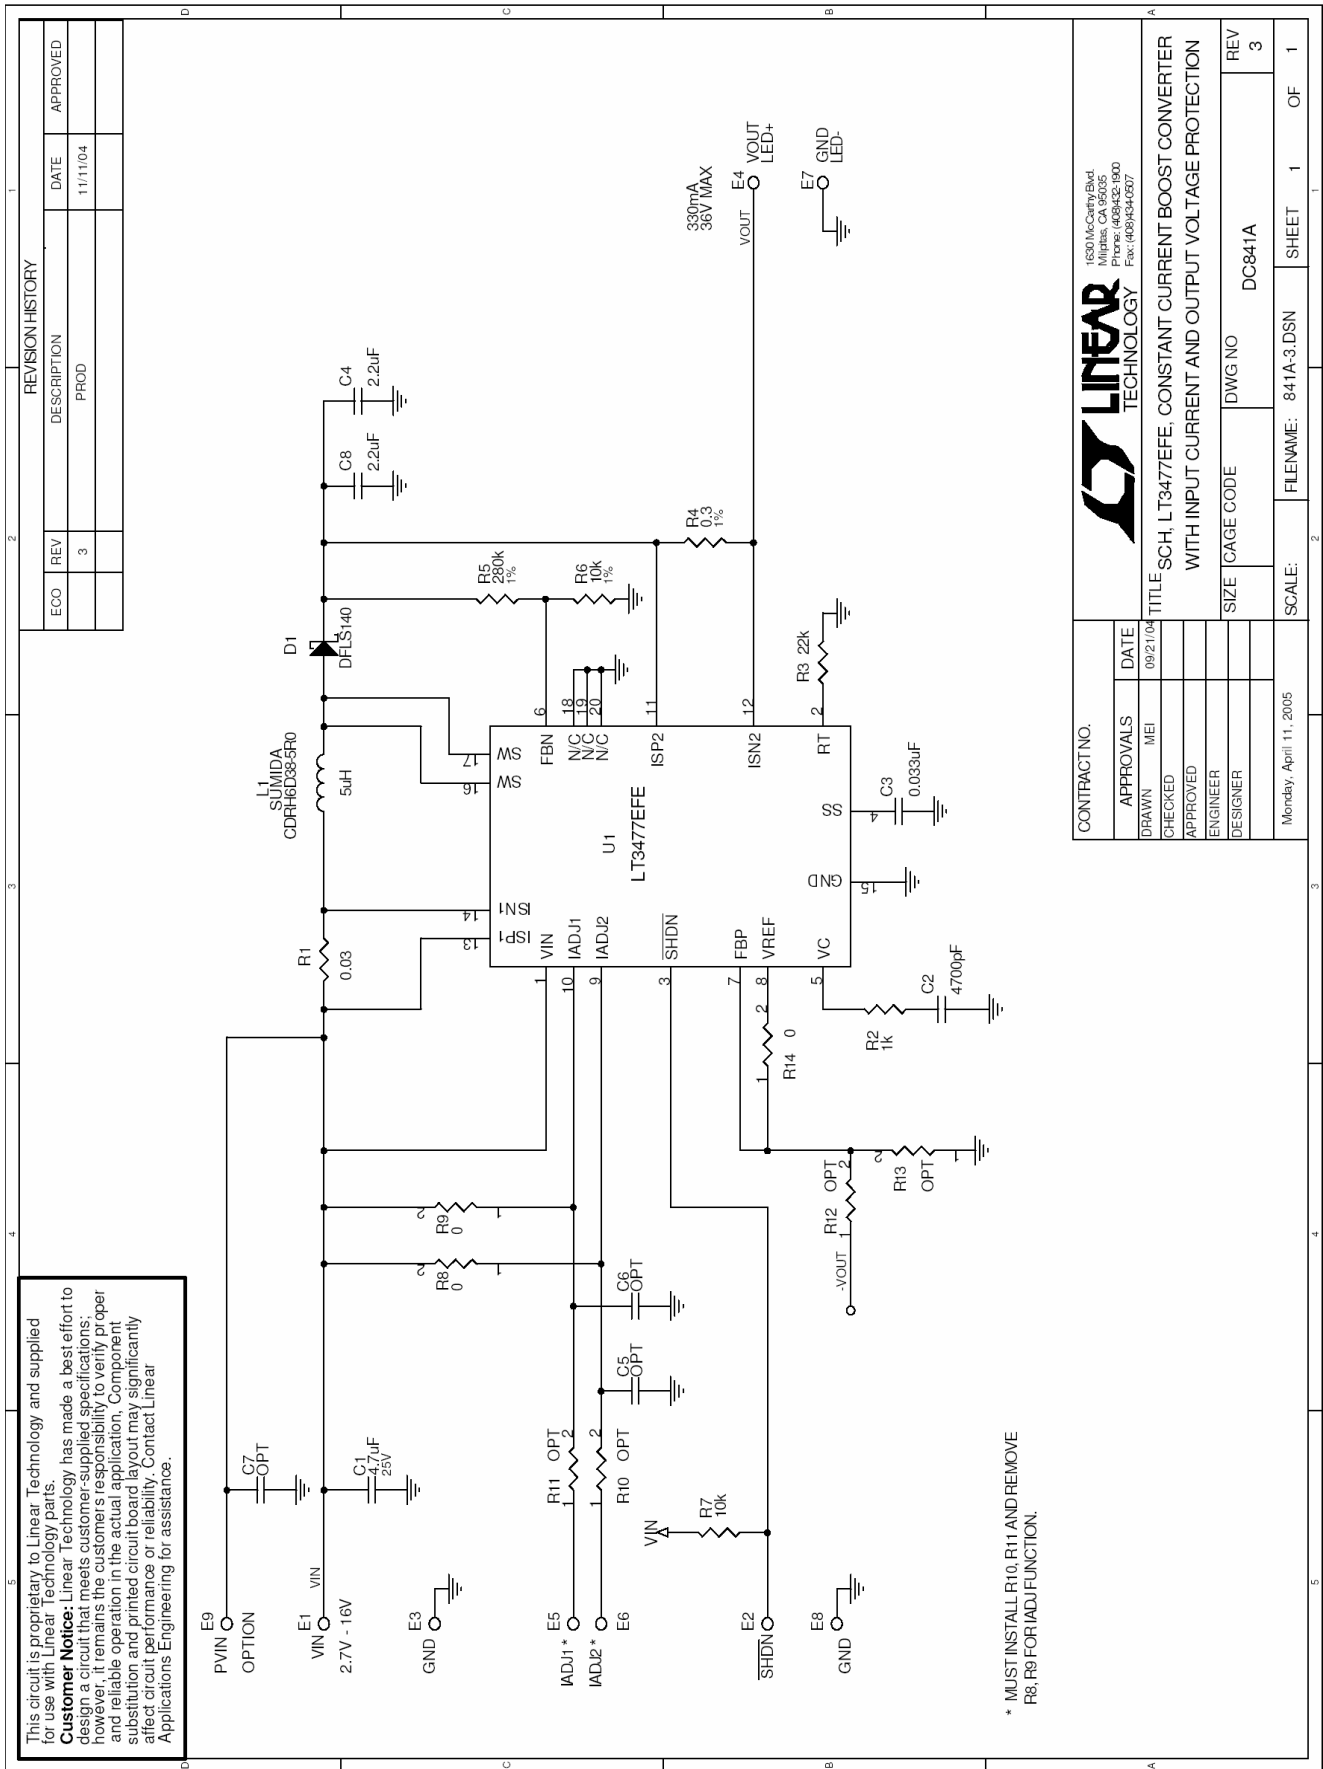



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331