

User Guide for  
FEBFSL126MR\_H432v1  
Evaluation Board

5V, 12V Green-Mode Fairchild Power  
Switch (FPS™)

Featured Fairchild Product:  
FSL126MR

***Direct questions or comments  
about this evaluation board to:  
“Worldwide Direct Support”***

***[Fairchild Semiconductor.com](http://Fairchild Semiconductor.com)***

## Table of Contents

|  |    |
|--|----|
| 1. Introduction.....                                   | 3  |
| 1.1. General Description .....                         | 3  |
| 1.2. Features .....                                    | 3  |
| 2. General Specifications .....                        | 4  |
| 3. Photographs.....                                    | 5  |
| 4. PCB Layout.....                                     | 6  |
| 5. Test Conditions and Items .....                     | 7  |
| 6. Performance of Evaluation Board.....                | 8  |
| 6.1. Startup Performance.....                          | 8  |
| 6.2. Normal Operation .....                            | 10 |
| 6.3. Voltage Stress of Secondary Diodes and Drain..... | 11 |
| 6.4. Output Ripple and Noise.....                      | 12 |
| 6.5. Ripple and Noise Waveforms .....                  | 13 |
| 6.6. Short Protections.....                            | 14 |
| 6.7. Efficiency .....                                  | 18 |
| 6.9. Output Voltage Regulation .....                   | 21 |
| 6.10. IC Temperature Measurement .....                 | 21 |
| 6.11. Conducted EMI Measurements.....                  | 22 |
| 7. Schematic.....                                      | 23 |
| 8. Line Filter and Inductor Specification .....        | 24 |
| 9. Transformer Specification .....                     | 27 |
| 10. Bill of Materials .....                            | 31 |
| 11. Revision History .....                             | 32 |

This user guide supports the evaluation kit for the FSL126MR. It should be used in conjunction with the FSL126MR datasheet as well as Fairchild's application notes and technical support team. Please visit Fairchild's website at [www.fairchildsemi.com](http://www.fairchildsemi.com).

## 11. Introduction

This document is an engineering report describing measured performance of the FSL126MR.

### 1.1. General Description

The FSL126MR integrated Pulse Width Modulator (PWM) and SenseFET is specifically designed for high-performance offline Switch-Mode Power Supplies (SMPS) with minimal external components. FSL126MR includes integrated high-voltage power switching regulators that combine an avalanche-rugged SenseFET with a current-mode PWM control block.

The integrated PWM controller includes: Under-Voltage Lockout (UVLO) protection, Leading-Edge Blanking (LEB), a frequency generator for EMI attenuation, an optimized gate turn-on/turn-off driver, Thermal Shutdown (TSD) protection, and temperature-compensated precision current sources for loop compensation and fault protection circuitry. The FSL126MR offers good soft-start performance. When compared to a discrete MOSFET and controller or RCC switching converter solution, the FSL126MR reduces total component count, design size, and weight; while increasing efficiency, productivity, and system reliability. This device provides a basic platform that is well suited for the design of cost-effective flyback converters.

### 1.2. Features

- Internal Avalanche-Rugged SenseFET (650V)
- Under 50mW Standby Power Consumption at 265V<sub>AC</sub>, No-load Condition with Burst Mode
- Fixed Operating Frequency with Frequency Modulation for Attenuating EMI
- Internal Startup Circuit
- Built-in Soft-Start: 15ms
- Pulse-by-Pulse Current Limiting
- Protections: Over-Voltage Protection (OVP), Overload Protection (OLP), Output-Short Protection (OSP), Abnormal Over-Current Protection (AOCP), Internal Thermal Shutdown Function with Hysteresis (TSD)
- Auto-Restart Mode
- Under-Voltage Lockout (UVLO)
- Low Operating Current: 1.8mA
- Adjustable Peak Current Limit


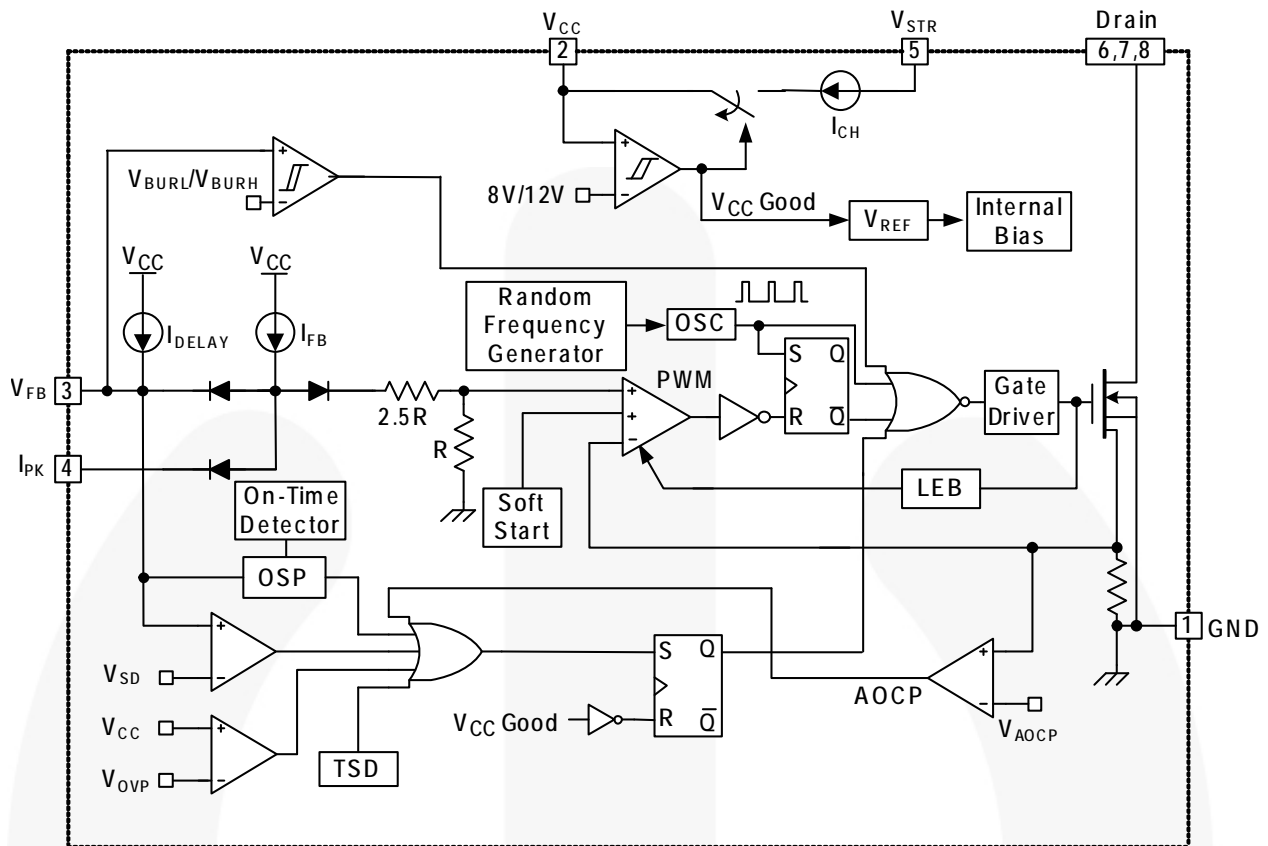


Figure 1. Internal Block Diagram

## 11. General Specifications

| Specification             | Min. | Max. | Units           |
|---------------------------|------|------|-----------------|
| <b>Input</b>              |      |      |                 |
| Voltage                   | 90   | 264  | V <sub>AC</sub> |
| Frequency                 | 47   | 63   | Hz              |
| <b>Output</b>             |      |      |                 |
| Output Voltage 1          |      | 5    | V               |
| Output Current 1          |      | 1.8  | A               |
| Output Voltage 2          |      | 12   | V               |
| Output Current 2          |      | 0.4  | A               |
| <b>Total Output Power</b> |      |      |                 |
| Full-load Output Power    |      | 13.8 | W               |

## 11. Photographs

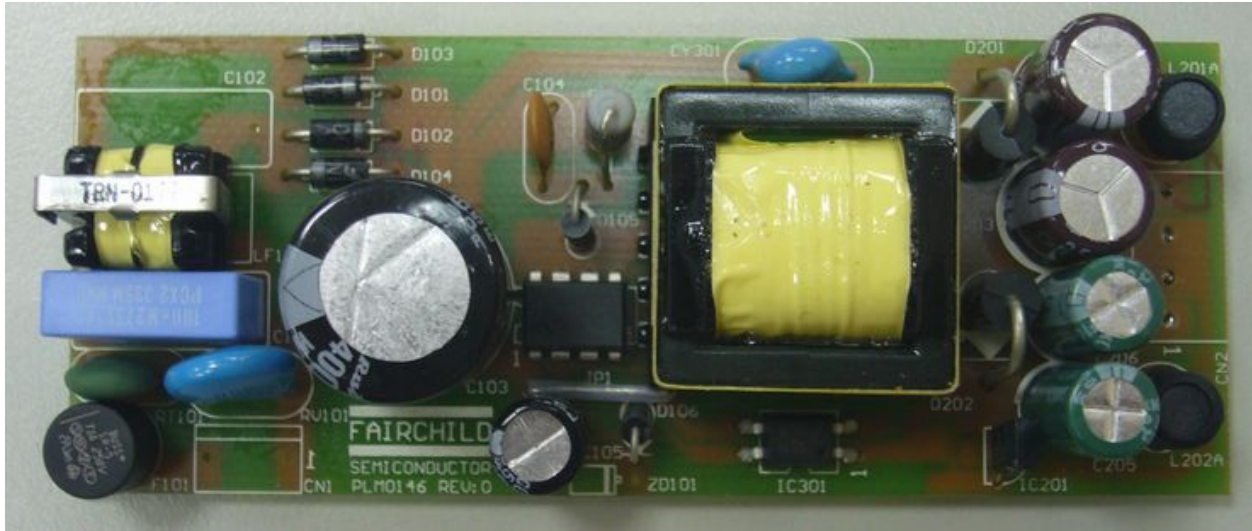

**Figure 2.** Top View (Dimension 106 x 41[mm<sup>2</sup>])

## 11. PCB Layout

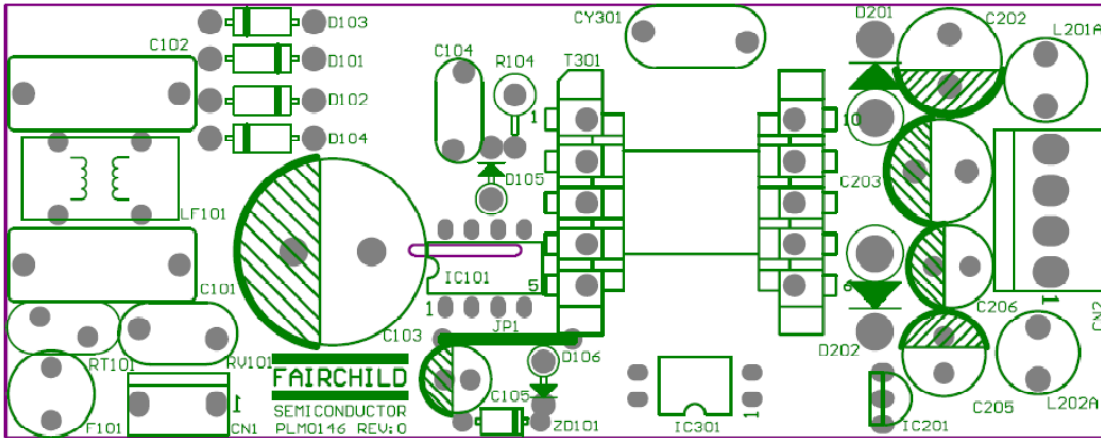


Figure 3. Top Overlay Silk Screen

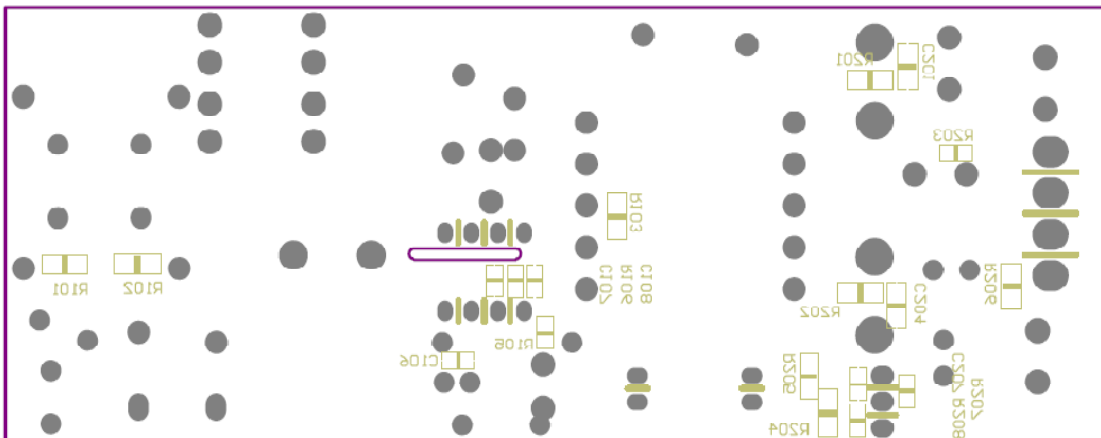


Figure 4. Bottom Overlay Silk Screen

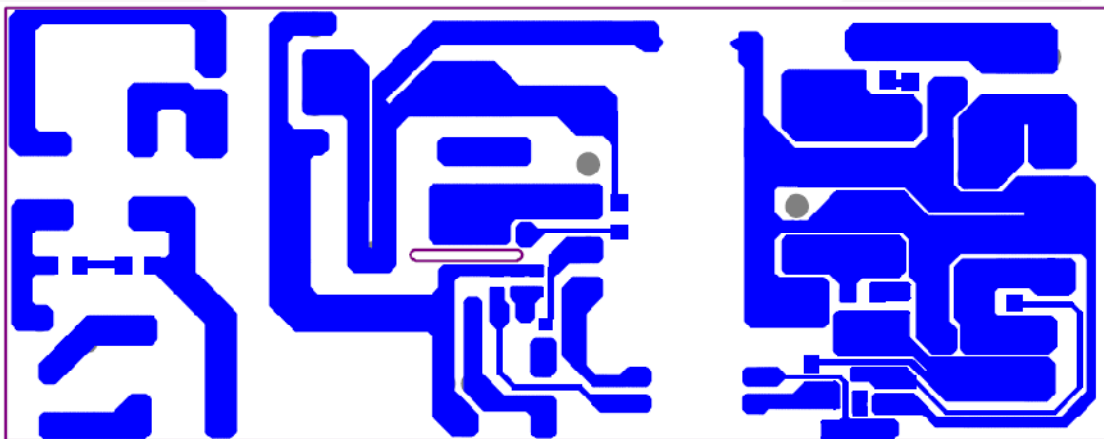



Figure 5. Bottom Layer Pattern

## 11. Test Conditions and Items


|                         |   |
|-------------------------|---|
| <b>Test Model</b>       | FEBFSL126MR_H432v1  |
| <b>Test Date</b>        | 4.29, 2011  |
| <b>Test Temperature</b> | Ambient   |
| <b>Test Equipment</b>   | <b>AC Source:</b> 6800 AC POWER SOURCE<br><b>Electronic Load:</b> Chroma 63030<br><b>Power Meter:</b> Yokogawa WT210<br><b>Oscilloscope:</b> LeCory 24Xs-A  |
| <b>Test Items</b>       | <ol style="list-style-type: none"> <li>1. Startup performance</li> <li>2. Normal Operation</li> <li>3. Voltage Stress of Secondary Diodes and Drain</li> <li>4. Output Ripple &amp; Noise</li> <li>5. Short Protections</li> <li>6. Power Off Waveforms</li> <li>7. Efficiency</li> <li>8. Standby Power Consumption</li> <li>9. Output voltage regulation</li> <li>10. Temperature Measurement</li> <li>11. Conducted EMI Measurement</li> </ol> |

## 11. Performance of Evaluation Board


### 6.5. Startup Performance

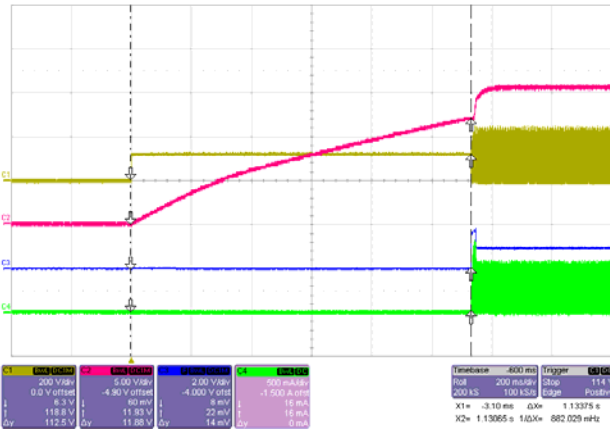


**Figure 6. Startup Time (AC Input to  $V_{CC}$  UVLO HIGH) = 1133.75ms, 90V<sub>AC</sub> and Full-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div**

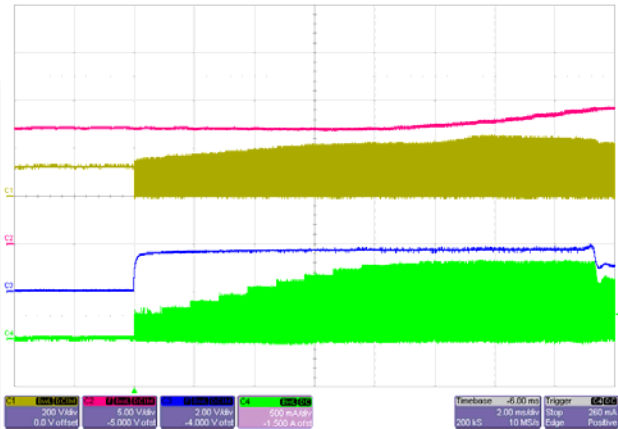

**Figure 7. Soft-Start, 90V<sub>AC</sub> and Full-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 2ms/div**

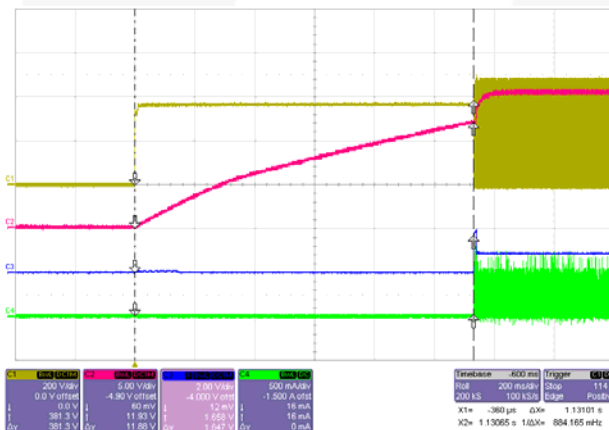

**Figure 8. Startup Time (AC Input to  $V_{CC}$  UVLO HIGH) = 1131.01ms, 265V<sub>AC</sub> and Full-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div**

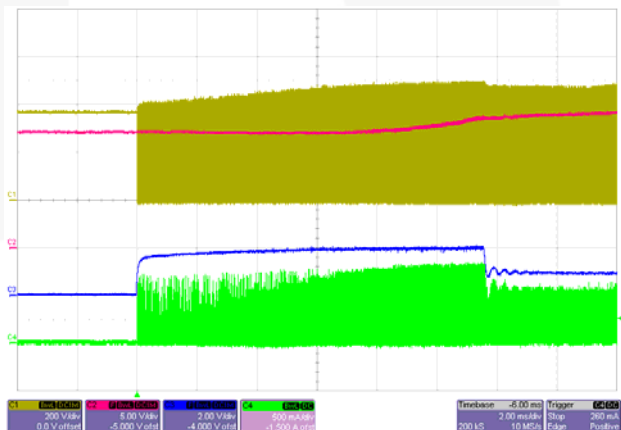


**Figure 9. Soft-Start, 265V<sub>AC</sub> and Full-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 2ms/div**


**Note:**

1. Startup time can be reduced with a smaller  $V_{CC}$  capacitor.




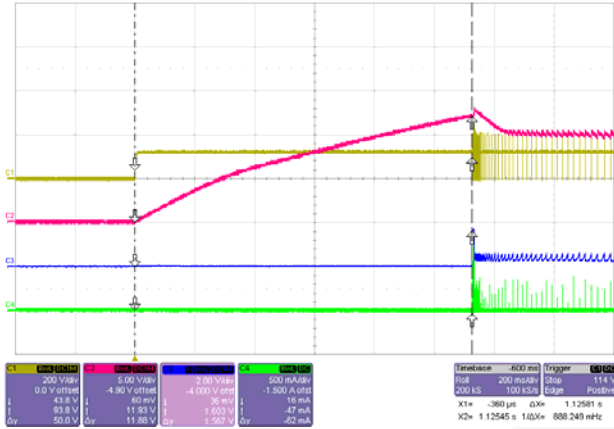


**Figure 10. Startup Time (AC Input to  $V_{CC}$  UVLO HIGH) = 1125.81ms, 90V<sub>AC</sub> and No-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div**

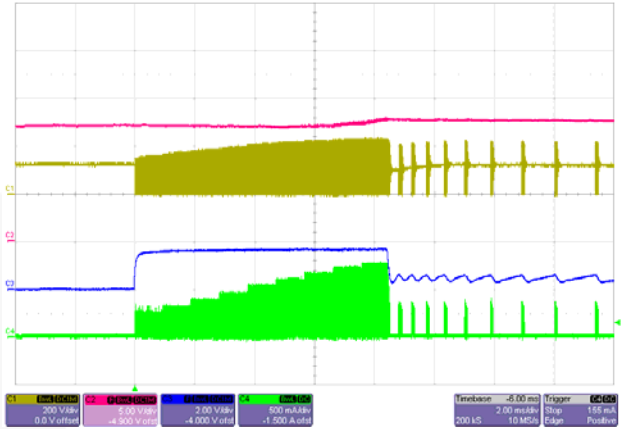

**Figure 11. Soft-Start, 90V<sub>AC</sub> and No-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 2ms/div**

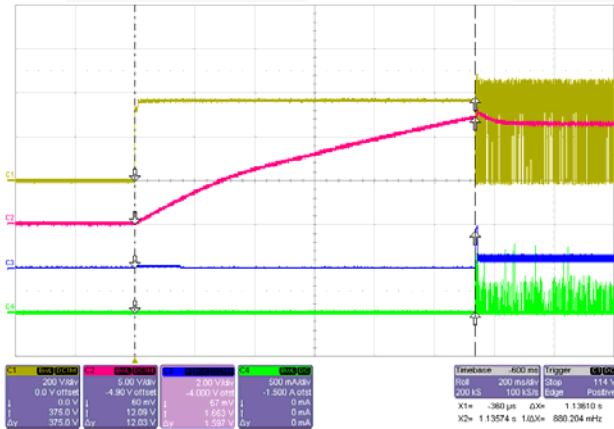

**Figure 12. Startup Time (AC Input to  $V_{CC}$  UVLO HIGH) = 1136.10ms, 265V<sub>AC</sub> and No-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div**

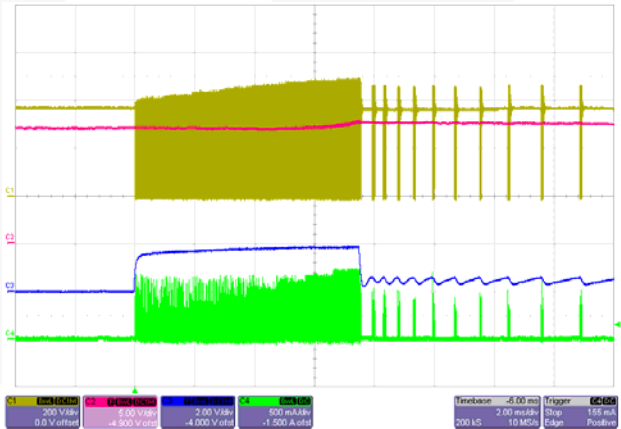


**Figure 13. Soft-Start, 265V<sub>AC</sub> and No-Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 2ms/div**


**Note:**

- Startup time can be reduced with a smaller  $V_{CC}$  capacitor.



## 1.2. Normal Operation

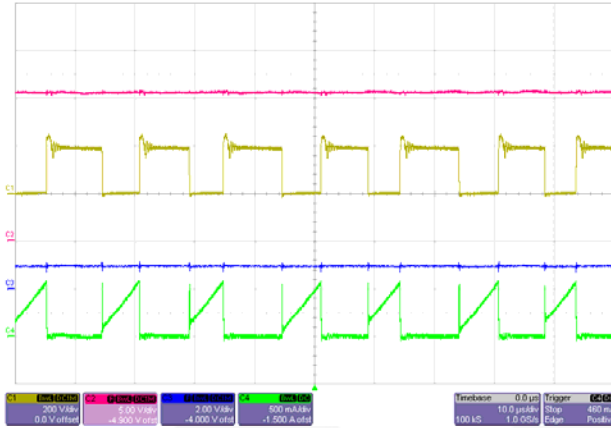



**Figure 14.** 90V<sub>AC</sub> and Full-Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 10µs/div

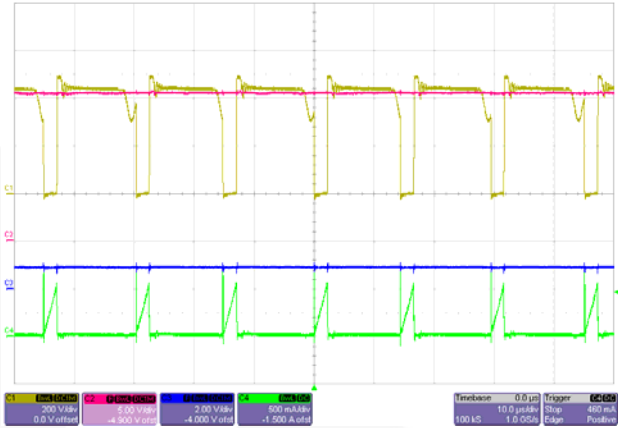

**Figure 15.** 265V<sub>AC</sub> and Full-Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 10µs/div

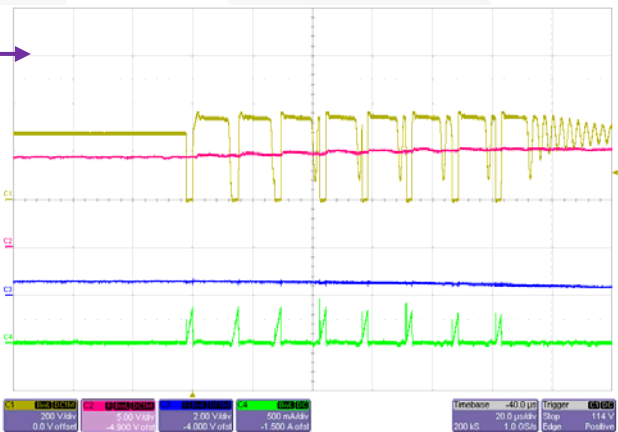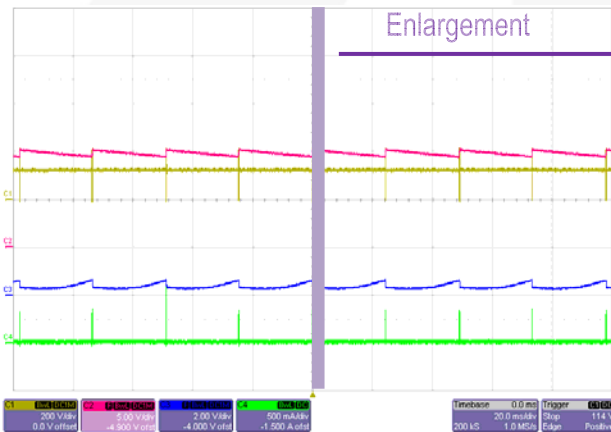


**Figure 16.** 90V<sub>AC</sub> and No-Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 20ms/div and 20µs/div

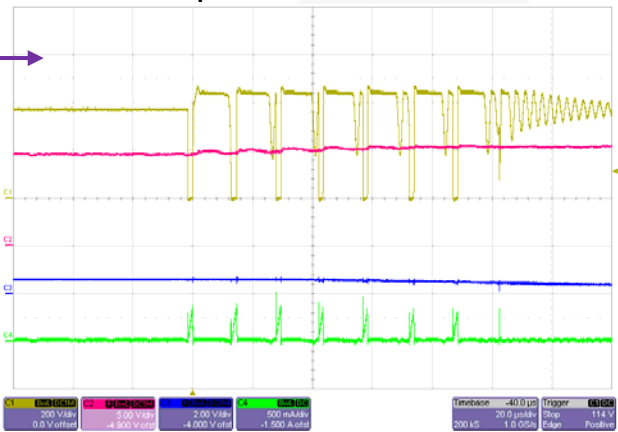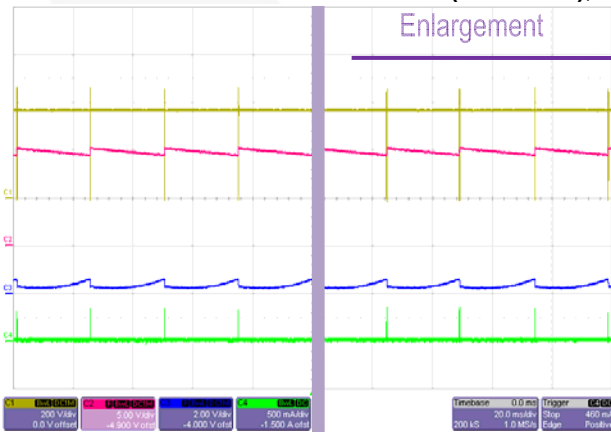


**Figure 17.** 265V<sub>AC</sub> and No-Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 20ms/div and 20µs/div


### 6.3. Voltage Stress of Secondary Diodes and Drain

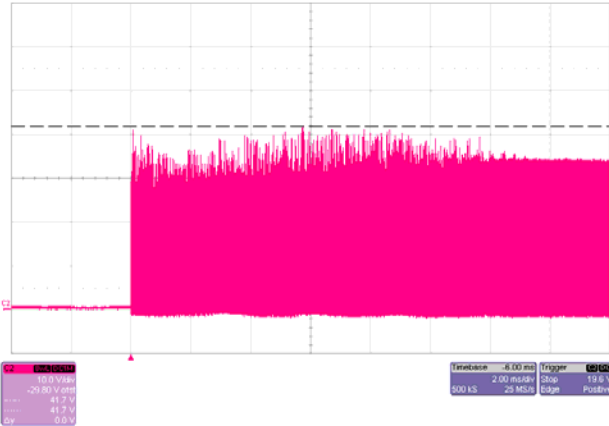

**Figure 18. Second Diode Voltage, 5V Output Diode with 265V<sub>AC</sub> & Full-Load Condition, V<sub>DIODE.MAX</sub> at Startup = 41.7V, CH2: V<sub>DIODE</sub>, (10V/div) Time: 2ms/div**

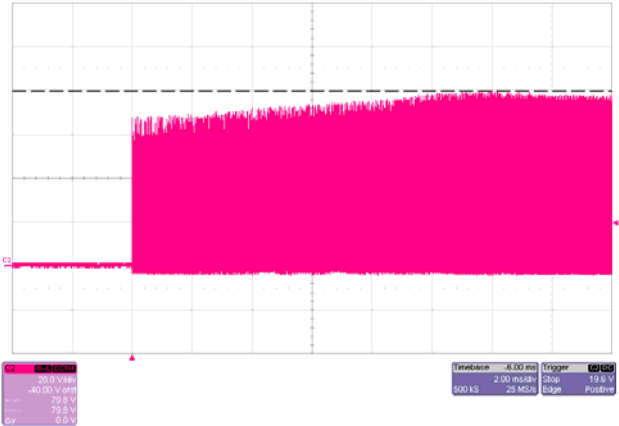

**Figure 19. Second Diode Voltage, 12V Output Diode with 265V<sub>AC</sub> & Full-Load Condition, V<sub>DIODE.MAX</sub> at Startup = 79.8V, CH2: V<sub>DIODE</sub>, (20V/div) Time: 2ms/div**

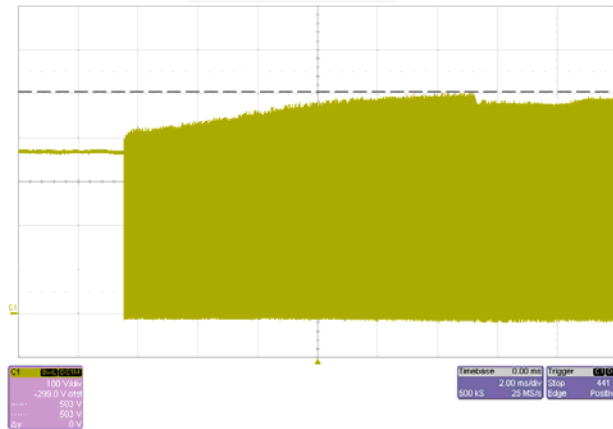

**Figure 20. Drain Voltage with 265V<sub>AC</sub>, & Full-Load Condition, V<sub>DS.MAX</sub> at Startup = 503V, CH2: V<sub>DS</sub>, (100V/div), Time: 2ms/div**

## 1.4. Output Ripple and Noise


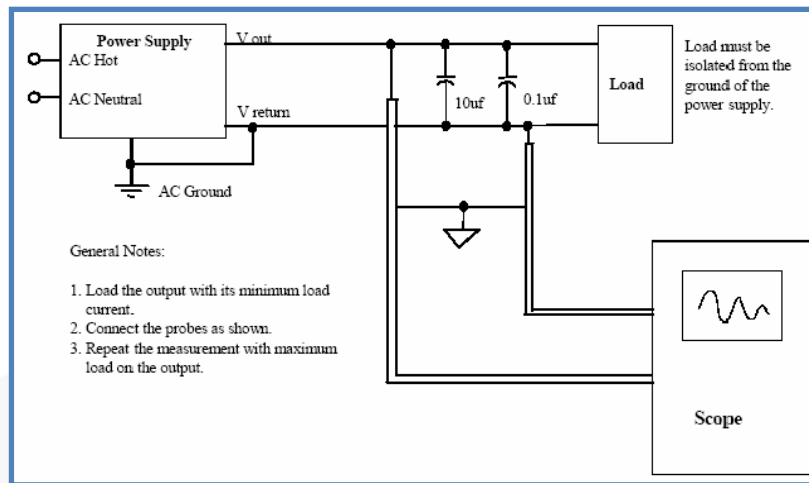


Figure 21. Recommended Test Setup


Table 1. Output Ripple and Noise Table

|                  | 90V <sub>AC</sub> |            | 110V <sub>AC</sub> |            | 230V <sub>AC</sub> |            | 265V <sub>AC</sub> |            |
|------------------|-------------------|------------|--------------------|------------|--------------------|------------|--------------------|------------|
|                  | 5V Output         | 12V Output | 5V Output          | 12V Output | 5V Output          | 12V Output | 5V Output          | 12V Output |
| <b>100% Load</b> | 37mV              | 70mV       | 29mV               | 49mV       | 20mV               | 35mV       | 18mV               | 33mV       |
| <b>75% Load</b>  | 24mV              | 40mV       | 17mV               | 27mV       | 15mV               | 26mV       | 16mV               | 27mV       |
| <b>50% Load</b>  | 13mV              | 20mV       | 14mV               | 21mV       | 14mV               | 20mV       | 13mV               | 20mV       |
| <b>25% Load</b>  | 73mV              | 55mV       | 70mV               | 55mV       | 71mV               | 55mV       | 72mV               | 57mV       |
| <b>No-Load</b>   | 28mV              | 10mV       | 28mV               | 11mV       | 28mV               | 10mV       | 33mV               | 10mV       |


## 6.5. Ripple and Noise Waveforms

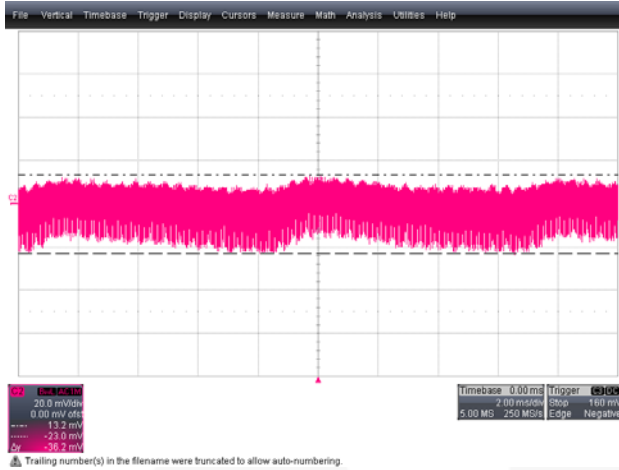


**Figure 22.**  $V_{O\_RIPPLE} = 37\text{mV}$ , 5V Output at 90V<sub>AC</sub> and Full-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 2ms/div

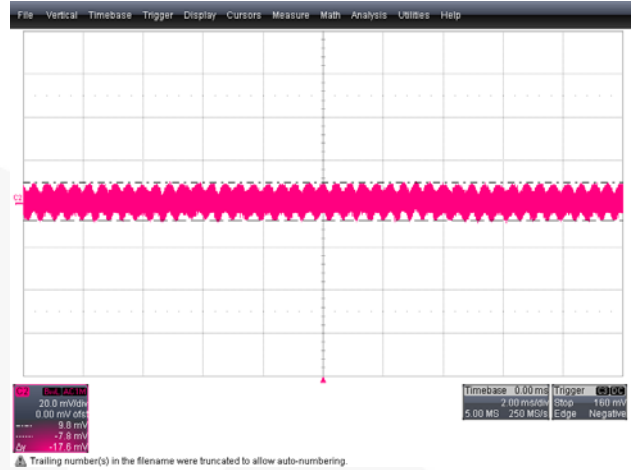

**Figure 23.**  $V_{O\_RIPPLE} = 18\text{mV}$ , 5V Output at 265V<sub>AC</sub> and Full-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 2ms/div

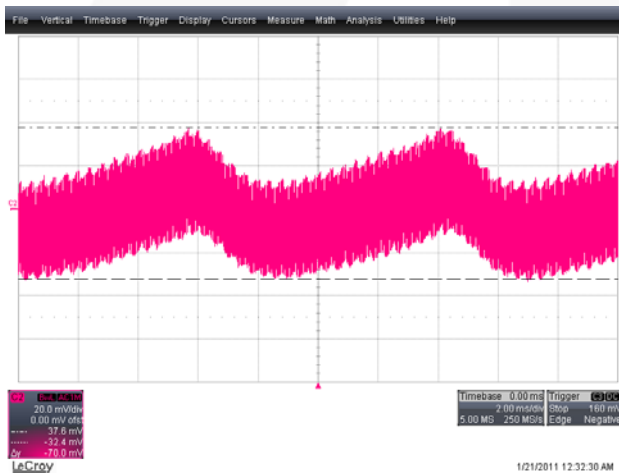


**Figure 24.**  $V_{O\_RIPPLE} = 70\text{mV}$ , 12V Output at 90V<sub>AC</sub> and Full-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 10ms/div

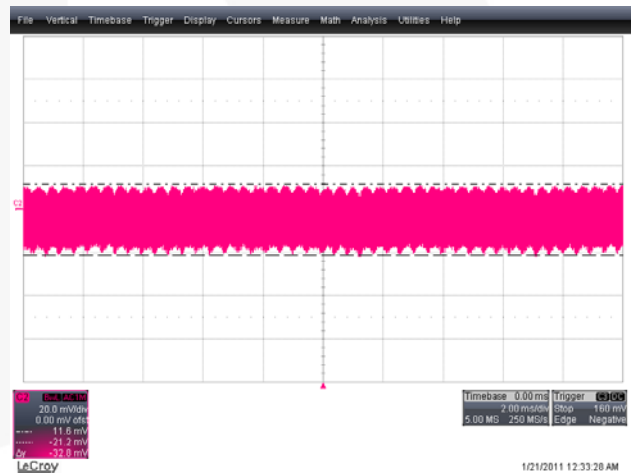


**Figure 25.**  $V_{O\_RIPPLE} = 33\text{mV}$ , 12V Output at 265V<sub>AC</sub> and Full-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 2ms/div




**Figure 26.**  $V_{O\_RIPPLE} = 28\text{mV}$ , 5V Output at 90V<sub>AC</sub> and No-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 10ms/div

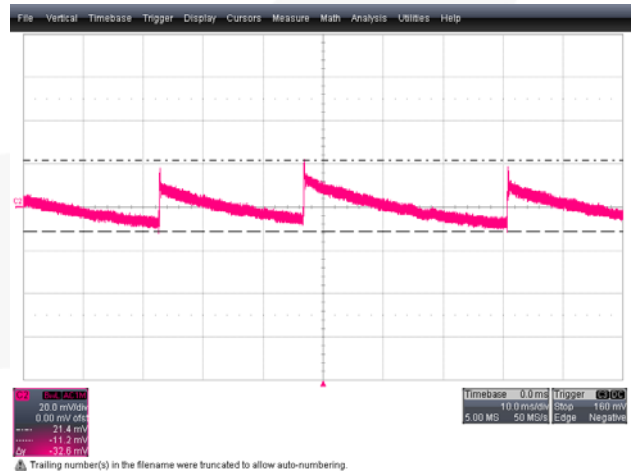

**Figure 27.**  $V_{O\_RIPPLE} = 33\text{mV}$ , 5V Output at 90V<sub>AC</sub> and No-Load Condition, CH2: V<sub>O</sub> (20mV/div), Time: 10ms/div

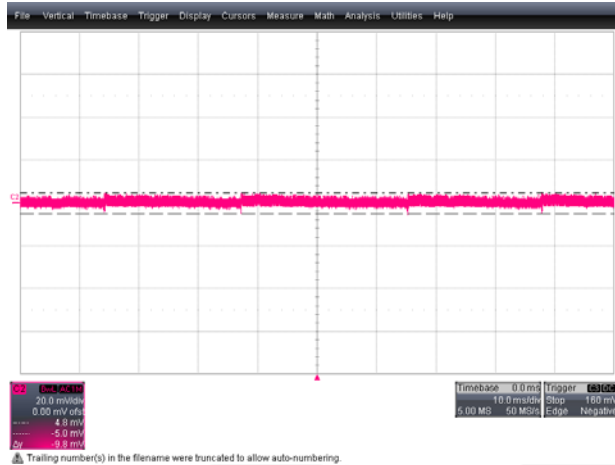


**Figure 28.**  $V_{O\_RIPPLE} = 10mV$ , 12V Output at 90V<sub>AC</sub> and No-Load Condition, CH2:  $V_O$  (20mV/div), Time: 10ms/div

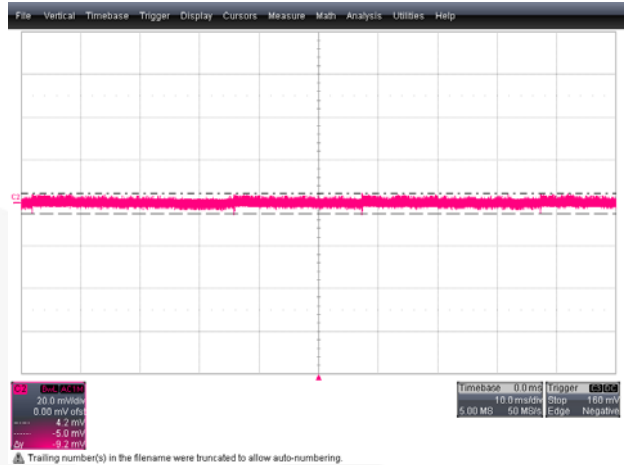


**Figure 29.**  $V_{O\_RIPPLE} = 10mV$ , 12V Output at 265V<sub>AC</sub> and No-Load Condition, CH2:  $V_O$  (20mV/div), Time: 10ms/div

## 6.6. Short Protections


### 6.6.1. Output Short

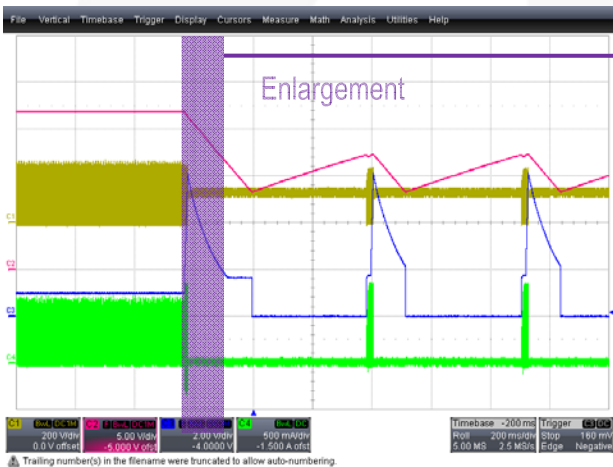


**Figure 30.** OLP Triggered:  $V_{FB} = 6.12V$ , 5V Output Short with 90V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

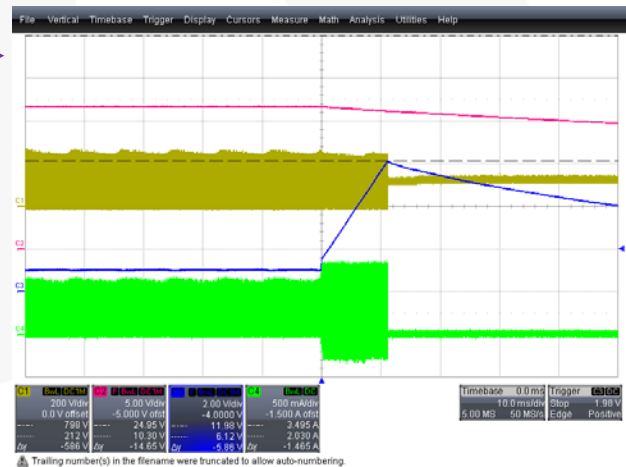

**Figure 31.** OSP Triggered:  $V_{FB} = 1.60V$ , 5V Output Short with 265V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

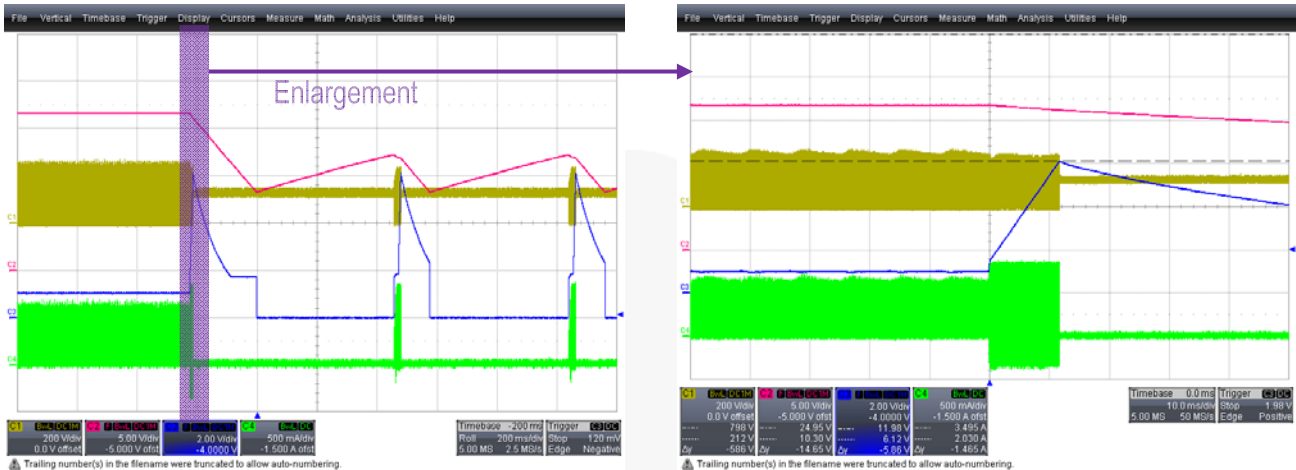


**Figure 32.** OLP Triggered :  $V_{FB} = 6.12V$ , 12V Output Short with 90V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

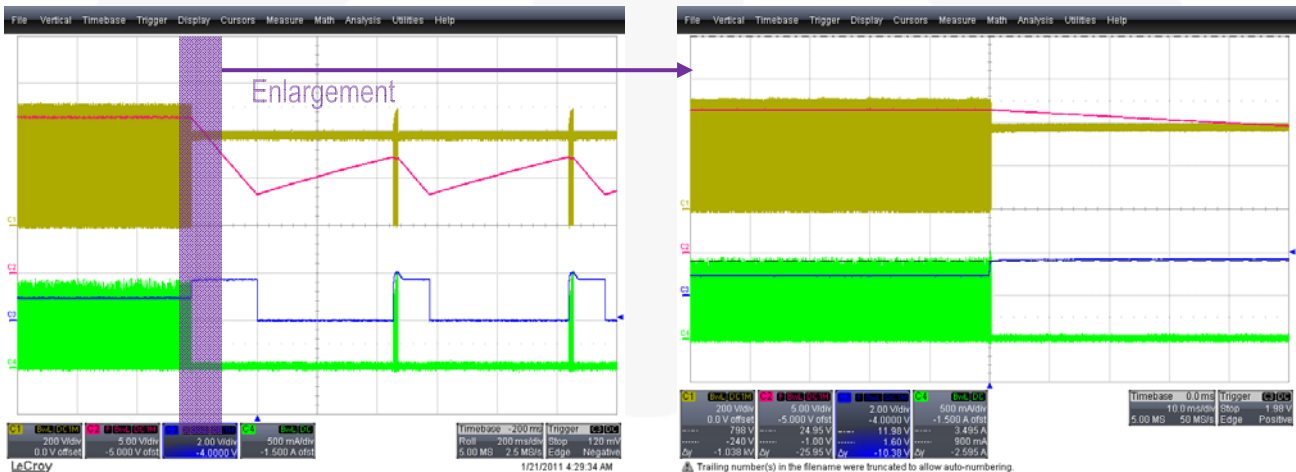


**Figure 33.** OSP Triggered:  $V_{FB} = 1.60V$ , 12V Output Short with 265V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

### 6.6.2. Second Diode Short

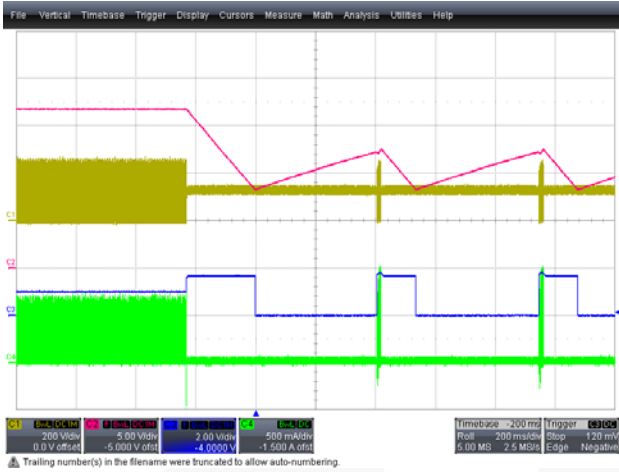

**Figure 34. 5V Diode Short at 90V<sub>AC</sub> and Full Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 200ms/div**

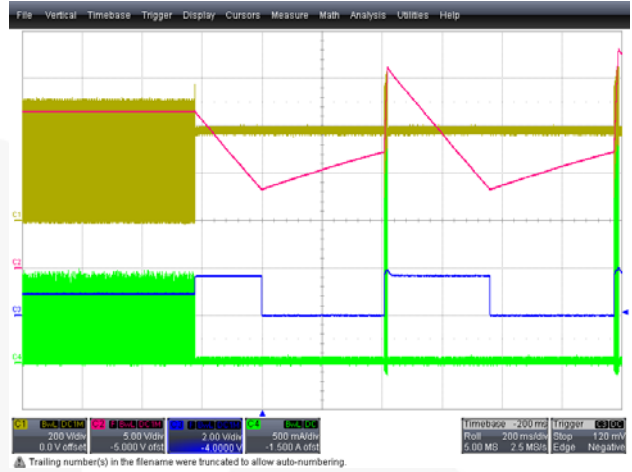

**Figure 35. 5V Diode Short at 265V<sub>AC</sub> and Full Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 200ms/div**




**Figure 36. 5V Diode Short at 90V<sub>AC</sub> and Full Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 200ms/div**




**Figure 37. 5V Output at 265V<sub>AC</sub> and Full Load Condition, CH1: V<sub>DS</sub> (200V/div), CH2: V<sub>CC</sub> (5V/div), CH3: V<sub>FB</sub> (2V/div), CH4: I<sub>DS</sub> (500mA/div), Time: 200ms/div**



### 6.6.2. Opto-Coupler Secondary Short

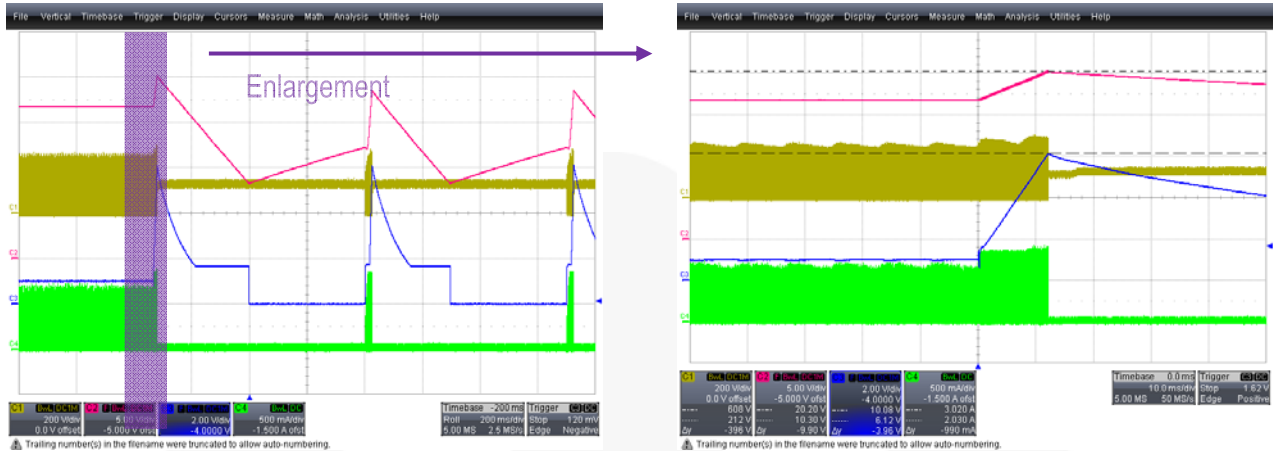


**Figure 38.** OLP Triggered:  $V_{FB} = 6.12V$ , Opto-coupler Secondary Short with 90V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

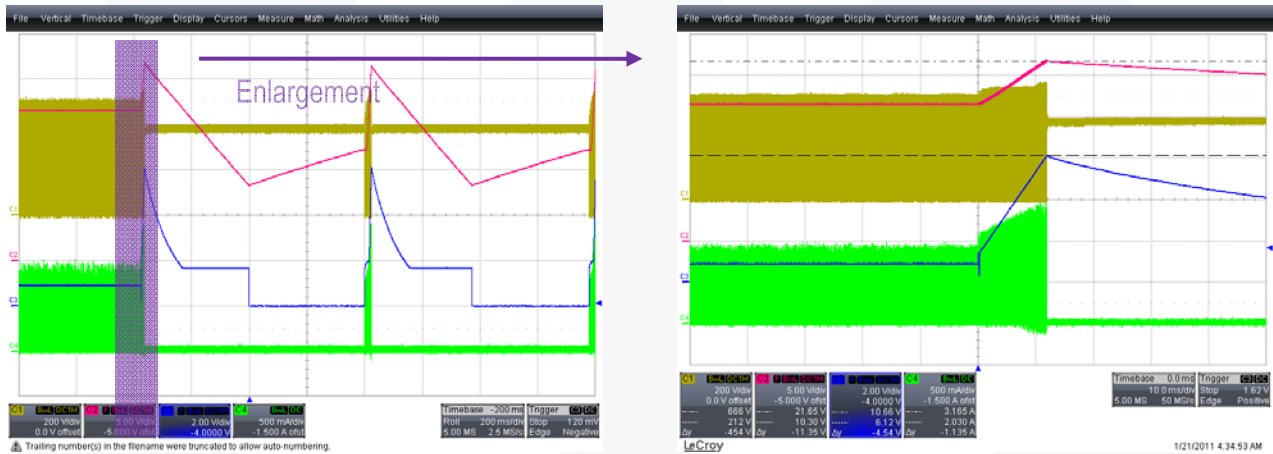


**Figure 39.** OLP Triggered:  $V_{FB} = 6.12V$ , Opto-coupler Secondary with 265V<sub>AC</sub> and Full-Load, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div and 10ms/div

### 6.6.3. Power-Off Waveforms

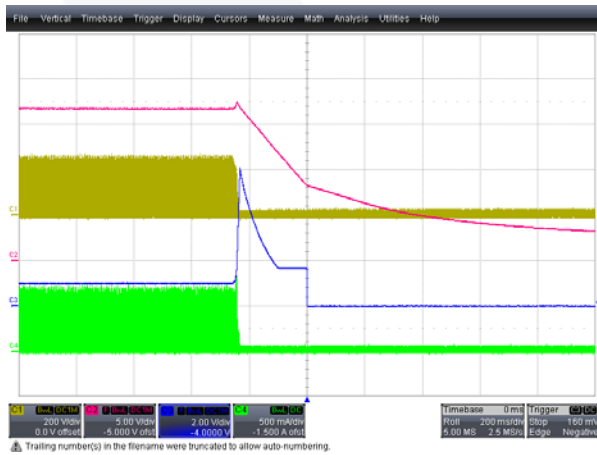

**Figure 40.** Power Off at 90V<sub>AC</sub> and Full Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div

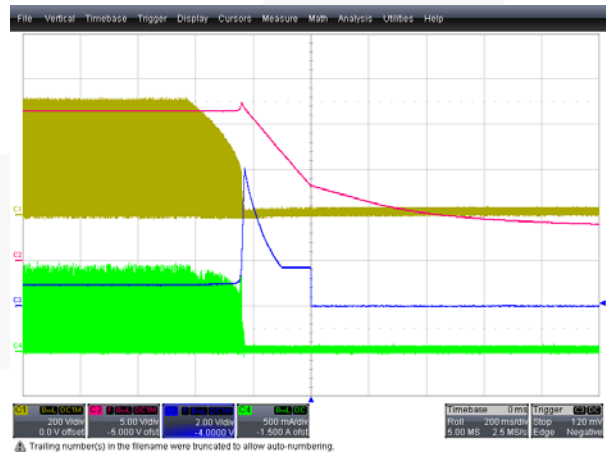

**Figure 41.** Power Off at 265V<sub>AC</sub> and Full Load Condition, CH1:  $V_{DS}$  (200V/div), CH2:  $V_{CC}$  (5V/div), CH3:  $V_{FB}$  (2V/div), CH4:  $I_{DS}$  (500mA/div), Time: 200ms/div

## 6.7. Efficiency

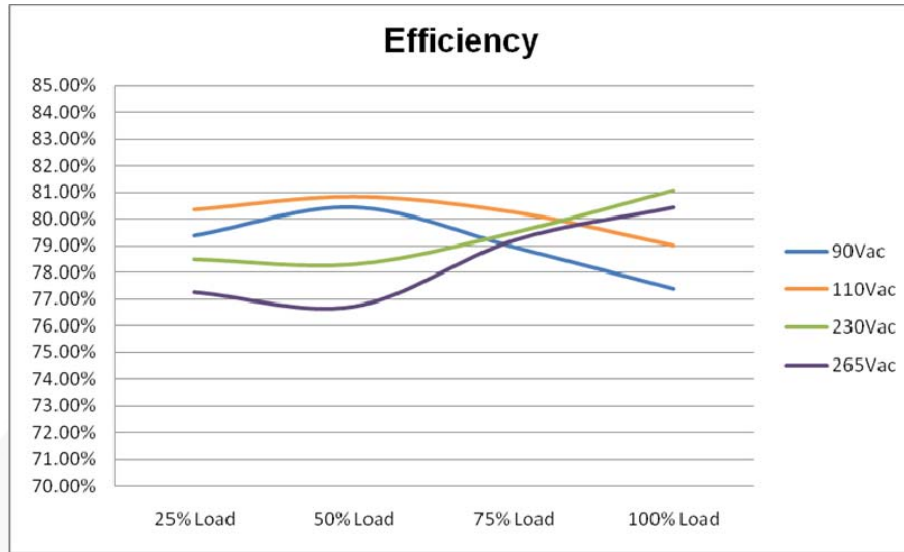


Figure 42. Efficiency vs. Load

Table 2. Efficiency Test Results

|                           |             | 90V <sub>AC</sub> |                | 110V <sub>AC</sub> |                | 230V <sub>AC</sub> |                | 265V <sub>AC</sub> |                |
|---------------------------|-------------|-------------------|----------------|--------------------|----------------|--------------------|----------------|--------------------|----------------|
|                           |             | V <sub>O</sub>    | I <sub>O</sub> | V <sub>O</sub>     | I <sub>O</sub> | V <sub>O</sub>     | I <sub>O</sub> | V <sub>O</sub>     | I <sub>O</sub> |
| 100% Load                 | 5V Output   | 4.998V            | 1.800A         | 4.998V             | 1.800A         | 4.999V             | 1.800A         | 4.999V             | 1.800A         |
|                           | 12V Output  | 11.567V           | 0.400A         | 11.540V            | 0.400A         | 11.525V            | 0.400A         | 11.525V            | 0.400A         |
|                           | Input Power | 17.60W            |                | 17.23W             |                | 16.78W             |                | 16.92W             |                |
|                           | Efficiency  | 77.40%            |                | 79.00%             |                | 81.10%             |                | 80.43%             |                |
| 75% Load                  | 5V Output   | 4.999V            | 1.350A         | 4.999V             | 1.350A         | 4.999V             | 1.350A         | 4.999V             | 1.350A         |
|                           | 12V Output  | 11.460V           | 0.300A         | 11.453V            | 0.300A         | 11.452V            | 0.300A         | 11.450V            | 0.300A         |
|                           | Input Power | 12.90W            |                | 12.69W             |                | 12.81W             |                | 12.86W             |                |
|                           | Efficiency  | 78.97%            |                | 80.26%             |                | 79.50%             |                | 79.19%             |                |
| 50% Load                  | 5V Output   | 5.000V            | 0.900A         | 5.000V             | 0.900A         | 5.000V             | 0.900A         | 5.000V             | 0.900A         |
|                           | 12V Output  | 11.371V           | 0.200A         | 11.371V            | 0.200A         | 11.370V            | 0.200A         | 11.370V            | 0.200A         |
|                           | Input Power | 8.42W             |                | 8.38W              |                | 8.65W              |                | 8.83W              |                |
|                           | Efficiency  | 80.45%            |                | 80.84%             |                | 78.31%             |                | 76.72%             |                |
| 25% Load                  | 5V Output   | 5.000V            | 0.450A         | 5.000V             | 0.450A         | 5.000V             | 0.450A         | 5.000V             | 0.450A         |
|                           | 12V Output  | 11.480V           | 0.100A         | 11.490V            | 0.100A         | 11.490V            | 0.100A         | 11.490V            | 0.100A         |
|                           | Input Power | 4.28W             |                | 4.23W              |                | 4.33W              |                | 4.40W              |                |
|                           | Efficiency  | 79.39%            |                | 80.35%             |                | 78.50%             |                | 77.25%             |                |
| <b>Average Efficiency</b> |             | 79.05%            |                | 80.11%             |                | 79.35%             |                | 78.40%             |                |

**Note:**


3. Above test was completed after 15 minutes aging.

**Table 3. Standby Power Consumption**


|      |             | 90V <sub>AC</sub> |                | 110V <sub>AC</sub> |                | 230V <sub>AC</sub> |                | 265V <sub>AC</sub> |                |
|------|-------------|-------------------|----------------|--------------------|----------------|--------------------|----------------|--------------------|----------------|
|      |             | V <sub>o</sub>    | I <sub>o</sub> | V <sub>o</sub>     | I <sub>o</sub> | V <sub>o</sub>     | I <sub>o</sub> | V <sub>o</sub>     | I <sub>o</sub> |
| 50mA | 5V Output   | 5.002V            | 50.6mA         | 5.002V             | 50.6mA         | 5.001V             | 50.6mA         | 5.001V             | 50.6mA         |
|      | 12V Output  | 12.290V           | 0.0mA          | 12.300V            | 0.0mA          | 12.380V            | 0.0mA          | 12.420V            | 0.0mA          |
|      | Input Power | 355.0mW           |                | 357.0mW            |                | 390.0mW            |                | 403.0mW            |                |
| 20mA | 5V Output   | 5.002V            | 20.6mA         | 5.002V             | 20.6mA         | 5.002V             | 20.6mA         | 5.002V             | 20.6mA         |
|      | 12V output  | 12.120V           | 0.0mA          | 12.130V            | 0.0mA          | 12.210V            | 0.0mA          | 12.220V            | 0.0mA          |
|      | Input Power | 168.0mW           |                | 169.0mW            |                | 180.0mW            |                | 191.0mW            |                |
| 10mA | 5V Output   | 5.002V            | 10.1mA         | 5.002V             | 10.1mA         | 5.002V             | 10.1mA         | 5.002V             | 10.1mA         |
|      | 12V Output  | 12.010V           | 0.0mA          | 12.020V            | 0.0mA          | 12.050V            | 0.0mA          | 12.080V            | 0.0mA          |
|      | Input Power | 104.0mW           |                | 103.0mW            |                | 112.0mW            |                | 117.0mW            |                |
| 0mA  | 5V Output   | 5.002V            | 0.0mA          | 5.002V             | 0.0mA          | 5.002V             | 0.0mA          | 5.002V             | 0.0mA          |
|      | 12V Output  | 11.600V           | 0.0mA          | 11.610V            | 0.0mA          | 11.610V            | 0.0mA          | 11.610V            | 0.0mA          |
|      | Input Power | 33.0mW            |                | 34.0mW             |                | 39.0mW             |                | 44.0mW             |                |

**Note:**

- Above test results represent changing 5V load condition with no-load condition of 12V output.

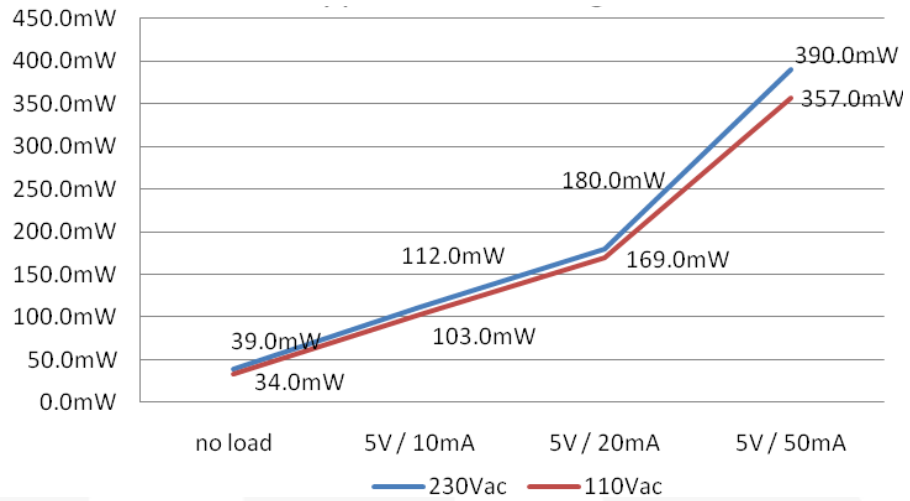

**Figure 43. Standby Power as Decreasing Load**

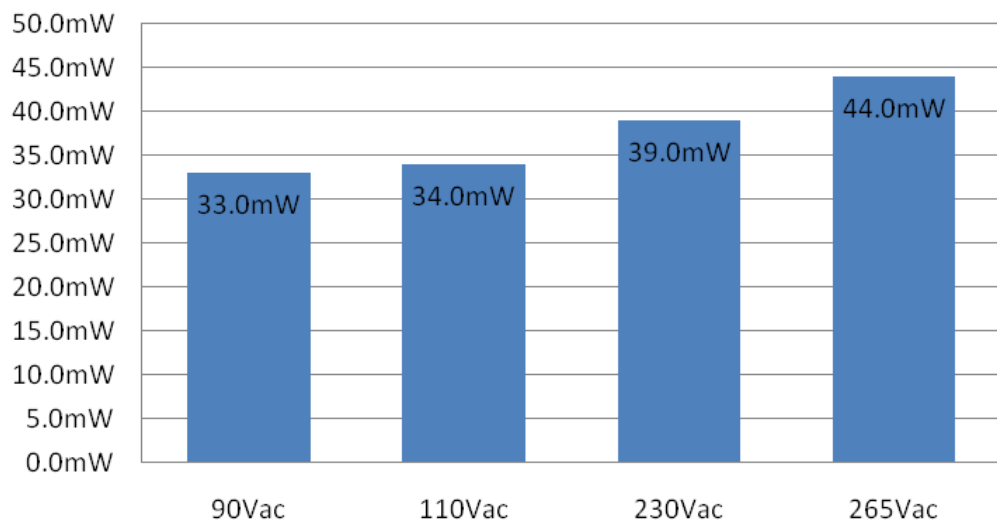

**Figure 44. No Load Standby Power**


## 6.9. Output Voltage Regulation

| Output Regulation Table |                    |         |         |         |         |          |          |          |           |
|-------------------------|--------------------|---------|---------|---------|---------|----------|----------|----------|-----------|
|                         |                    | No Load | 5V/10mA | 5V/20mA | 5V/50mA | 25% Load | 50% Load | 75% Load | 100% Load |
| 5V                      | 90V <sub>AC</sub>  | 0.04%   | 0.04%   | 0.04%   | 0.04%   | 0.00%    | 0.00%    | -0.02%   | -0.04%    |
|                         | 110V <sub>AC</sub> | 0.04%   | 0.04%   | 0.04%   | 0.04%   | 0.00%    | 0.00%    | -0.02%   | -0.04%    |
|                         | 230V <sub>AC</sub> | 0.04%   | 0.04%   | 0.04%   | 0.02%   | 0.00%    | 0.00%    | -0.02%   | -0.02%    |
|                         | 265V <sub>AC</sub> | 0.04%   | 0.04%   | 0.04%   | 0.02%   | 0.00%    | 0.00%    | -0.02%   | -0.02%    |
| 12V                     | 90V <sub>AC</sub>  | -3.33%  | 0.08%   | 1.00%   | 2.42%   | -4.33%   | -5.24%   | -4.50%   | -3.61%    |
|                         | 110V <sub>AC</sub> | -3.25%  | 0.17%   | 1.08%   | 2.50%   | -4.25%   | -5.24%   | -4.56%   | -3.83%    |
|                         | 230V <sub>AC</sub> | -3.25%  | 0.42%   | 1.75%   | 3.17%   | -4.25%   | -5.25%   | -4.57%   | -3.96%    |
|                         | 265V <sub>AC</sub> | -3.25%  | 0.67%   | 1.83%   | 3.50%   | -4.25%   | -5.25%   | -4.58%   | -3.96%    |

## 6.10. IC Temperature Measurement


|                         | 90V <sub>AC</sub> | 110V <sub>AC</sub> | 230V <sub>AC</sub> | 265V <sub>AC</sub> |
|-------------------------|-------------------|--------------------|--------------------|--------------------|
| <b>IC</b>               | 77.4°C            | 73.2°C             | 72.0°C             | 76.0°C             |
| <b>Transformer</b>      | 59.0°C            | 59.9°C             | 62.0°C             | 62.6°C             |
| <b>5V Output Diode</b>  | 87.2°C            | 86.7°C             | 86.9°C             | 87.0°C             |
| <b>12V Output Diode</b> | 56.4°C            | 56.5°C             | 57.0°C             | 57.0°C             |
| <b>Ambient</b>          | 30.0°C            | 29.1°C             | 29.2°C             | 29.0°C             |

## 6.11. Conducted EMI Measurements

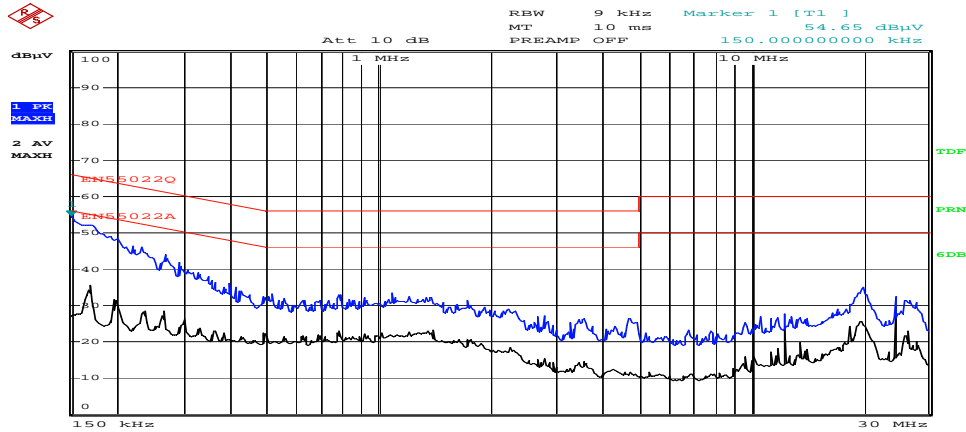


Date: 21.JAN.2011 17:45:41

**Figure 45.** <L1>,  $V_{IN} = 110V_{AC}$ , Load = 5V / 2.5Ω, Load = 12V / 28Ω

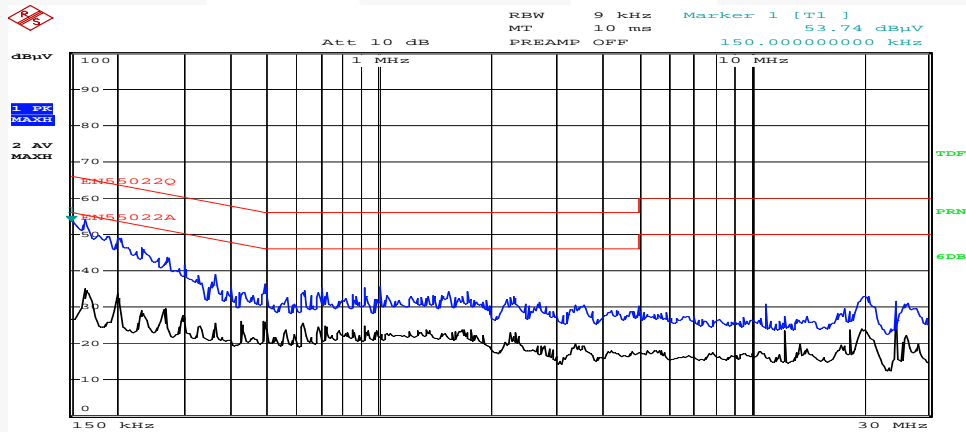


Date: 21.JAN.2011 17:43:54

**Figure 46.** <N>,  $V_{IN} = 110V_{AC}$ , Load = 5V / 2.5Ω, Load = 12V / 28Ω

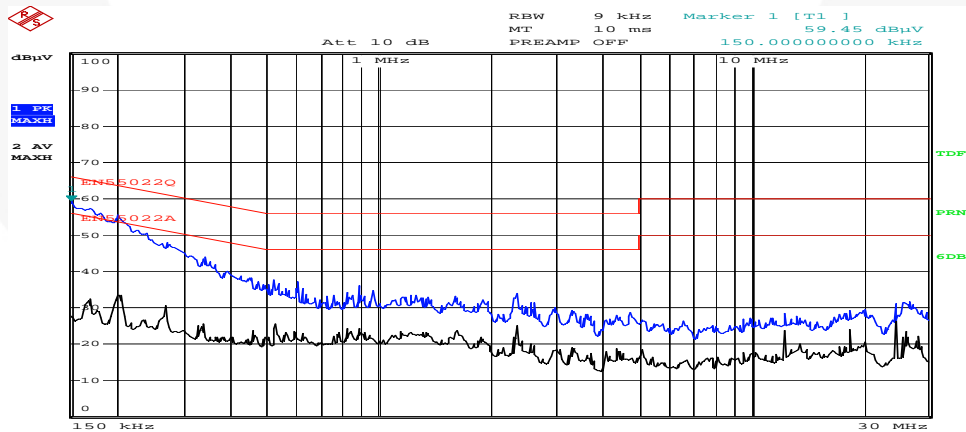

Date: 21.JAN.2011 17:40:22

**Figure 47.** <L1>,  $V_{IN} = 230V_{AC}$ , Load = 5V / 2.5Ω, Load = 12V / 28Ω

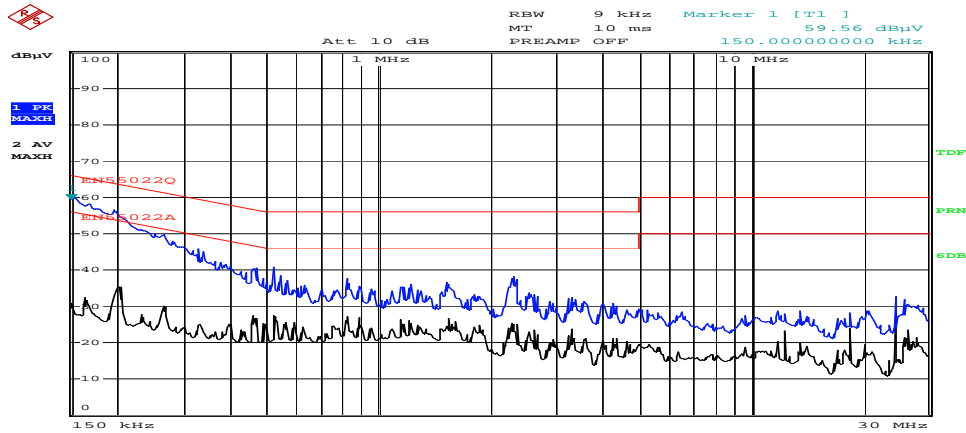

Date: 21.JAN.2011 17:42:09

Figure 48. <N>,  $V_{IN} = 230V_{AC}$ , Load = 5V / 2.5Ω, Load = 12V / 28Ω

## 11. Schematic

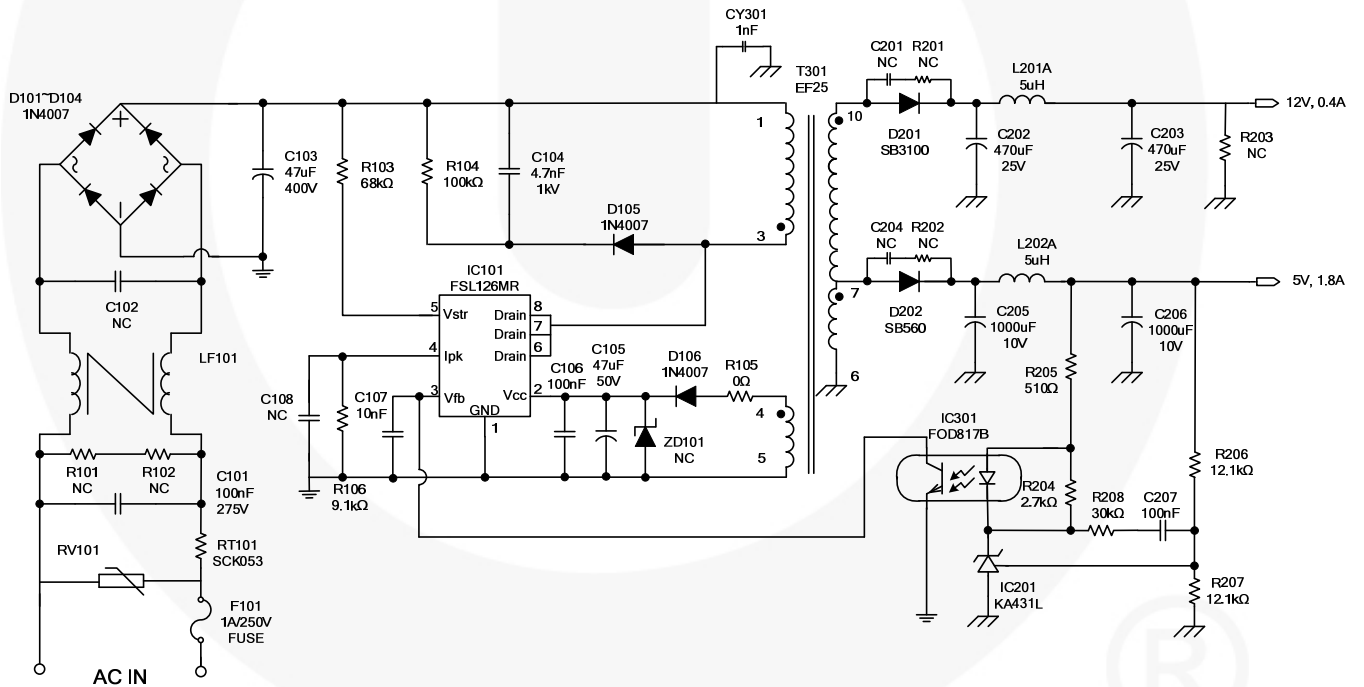



Figure 49. Schematic

## 8. Line Filter and Inductor Specification


|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0177 |
| ATE      | 12/22/2003 | Version | A | Page | 1/2      |

### 1. DIMENSION

(P1-4) TRN-0177

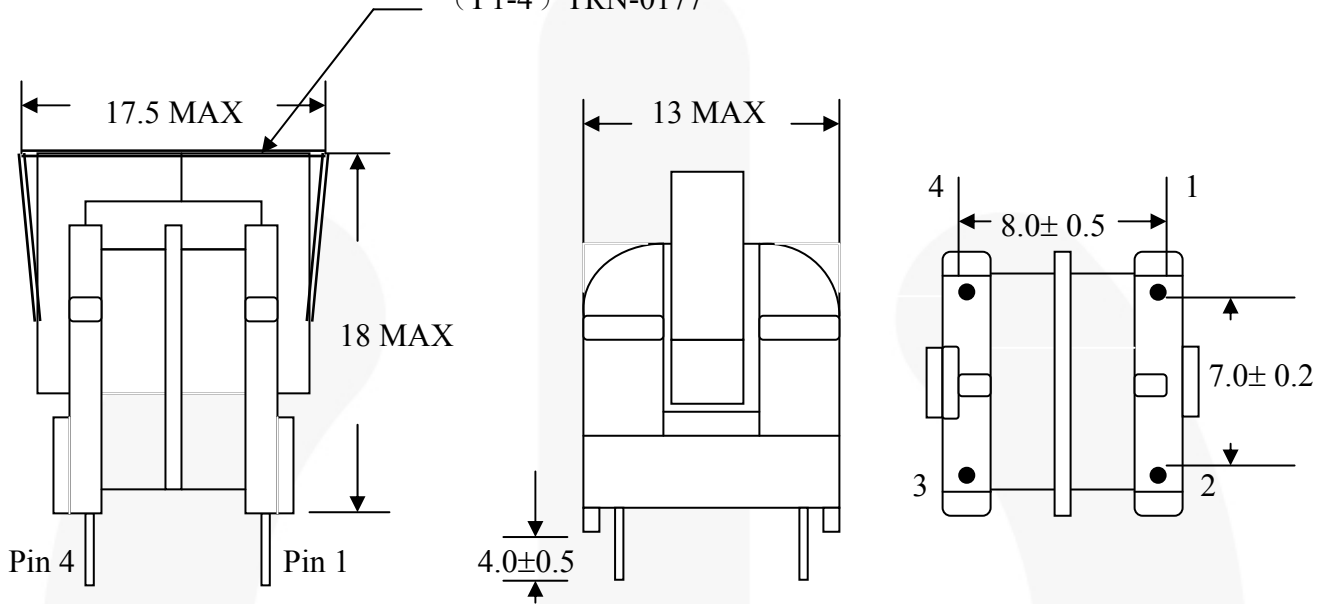

### 2. SCHEMATIC

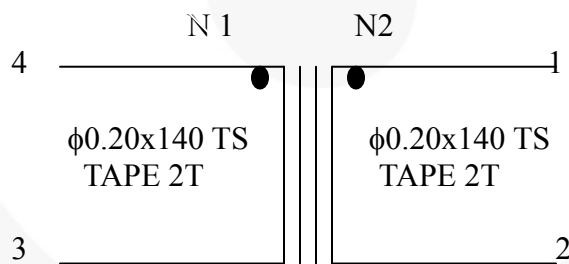

**Note :**

1. The inductance (winding) of N1 and N2 must be same, tolerance  $\pm 2\%$  .
2. The initial inductance of N1 and N2 must be : 50mH  $\pm 20$

| UNIT   | m/m          | DRAWN                         | CHECK          | TITLE     | LINE FILTER |
|--|--------------|-------------------------------|----------------|-----------|-------------|
| TEL  | (02)29450588 | Ci wun Chen                   | Guo long Huang | IDENT NO. | TRN-0177    |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO., LTD. |                | D W G NO. | I0903       |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                               |                |           |             |



|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0177 |
| DATE     | 12/22/2003 | Version | A | Page | 2/2      |

### 3. ELECTRICAL SPECIFICATION

3.1 Inductance test: at 1KHz ,1V

L1: 50mH  $\pm$  20% . L2 : 50mH  $\pm$ 20% .

3.2 DC Resistance test at 25°C

R1: 2.3 mOhmo max. R2 : 2.3 mOhmo max.

3.3 Hi-pot test :

AC 1000V /5mA/1s hi-pot for one minute between N1to N2.

AC 1000V /5mA/1s hi-pot for one minute between N1 & N2 to core.

3.4 Insulation test :

The insulation resistance is between winding to winding and winding to core measured by DC 500V, must be over 100Mohm.

3.5 Terminal strength :

1.0Kg on terminals for 30 seconds, test the breakdown.

### 4. MATERIALS LIST


| COMPONENT   | MAT'L                  | MANUFACTURE                           | UL FILE NO. |
|-------------|------------------------|---------------------------------------|-------------|
| 1BOBBIN     | T373J, 94V-0           | Chang Chun plastics CO.,LTD, TF-UU9.8 | E59481(S)   |
| 2.CORE      | A10, MJ                | Ferrite core UU9.8. Acme, Chilsin,.   |             |
| 3.WIRE      | UEW-2                  | Jung Shing Wire CO.,LTD               | E79029(S)   |
|             | UEW                    | Tai-I electric Wire & Cable CO.,LTD   | E85640(S)   |
| 4.VARNISH   | BC-346A                | John C Dolph CO.,LTD                  | E51047(M)   |
|             | 468-2FC                | Ripley Resin Engineering Co Inc.      | E81777(N)   |
| 5.TAPE      | 1350                   | Minnesota Mining & MFG co             | E17385(N)   |
|             | 3161                   | Nitto Denko CORP.                     | E34833(M)   |
| 6.TERMINALS | Tin-Coated-Copper Wire | Will for special wire CORP.           |             |
| 7.CLAMP     | UU9.8                  | Pin Hsiang industrial CO.,LTD         |             |

| UNIT   | m/m          | DRAWN                         | CHECK          | TITLE     | LINE FILTER |
|--|--------------|-------------------------------|----------------|-----------|-------------|
| TEL  | (02)29450588 | Ci wun Chen                   | Guo long Huang | IDENT NO. | TRN-0177    |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO., LTD. |                | D W G NO. | I0903       |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                               |                |           |             |

|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0216 |
| DATE     | 05/22/2007 | Version | A | Page | 1/1      |

**1.DIMENSION:**

**UNIT: mm**

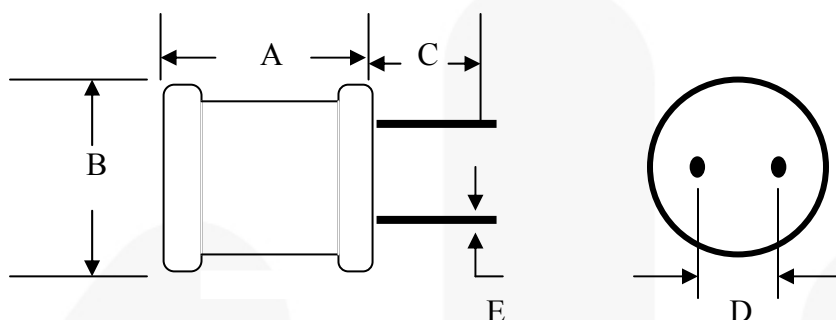

|   |          |
|---|----------|
| A | 11 max   |
| B | 9.0 max  |
| C | 10 (REF) |
| D | 3.0±1    |
| E | φ0.65    |

**2.ELECTRICAL SPECIFICATION: at 1KHz,0.3V**

- 2.1 INDUCTANCE : 5μH min
- 2.2 DC RESISTANCE : 28.mOhm max
- 2.3 TURN & WIRE : φ0.55x16.5TS(ref)

**3. MATERIALS LIST**


| COMPONENT   | MAT'L                      | MANUFACTURE                          | UL FILE NO. |
|-------------|----------------------------|--------------------------------------|-------------|
| 1.CORE      | S6,SGB<br>or equal         | Ferrite core DRWW 6x8<br>Jaw Shianq. |             |
| 2.WIRE      | UEW-B                      | Chuen Yih Wire CO.,LTD               | E154709(S)  |
|             | UEW-2                      | Jung Shing Wire CO.,LTD              | E79029(S)   |
|             | UEW                        | Tai-I Electric Wire & Cable CO.,LTD  | E85640(S)   |
| 3.TUBE      | KUHS-225                   | Korea Unichenm CO.,LTD               | E157822(S)  |
|             | 811                        | Sumitomo Electric Industries CO.,LTD | E48762(S)   |
| 4.TERMINALS | Tin coated-<br>Copper wire | Will for special wire CORP           |             |

| UNIT   | m/m          | DRAWN                        | CHECK          | TITLE        | LINE FILTER |
|--|--------------|------------------------------|----------------|--------------|-------------|
| TEL  | (02)29450588 | Ci wun Chen                  | Guo long Huang | IDENT<br>NO. | TRN-0216    |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO.,LTD. |                | DWG<br>NO.   | I0033       |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                              |                |              |             |

## 9. Transformer Specification

|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0310 |
| DATE     | 05/05/2011 | Version | A | Page | 1/4      |


### 1.DIMENSION

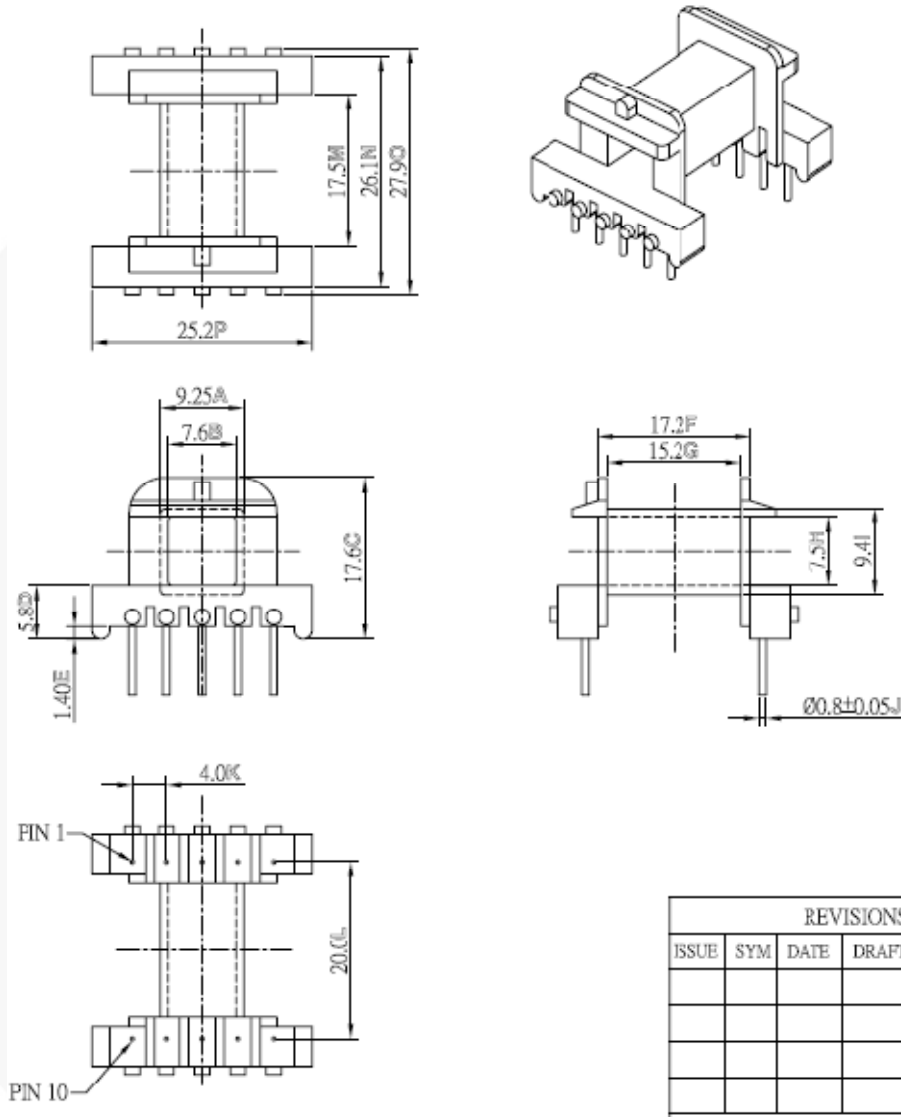

| UNIT   | m/m          | DRAWN                        | CHECK          | TITLE      | TRANS    |
|--|--------------|------------------------------|----------------|------------|----------|
| TEL  | (02)29450588 | Ci wun Chen                  | Guo long Huang | IDENT N.O. | TRN-0310 |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO.,LTD. |                | D W G N.O. | I2509    |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                              |                |            |          |

|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0310 |
| DATE     | 05/05/2011 | Version | A | Page | 2/4      |

**2.SCHEMATIC:**

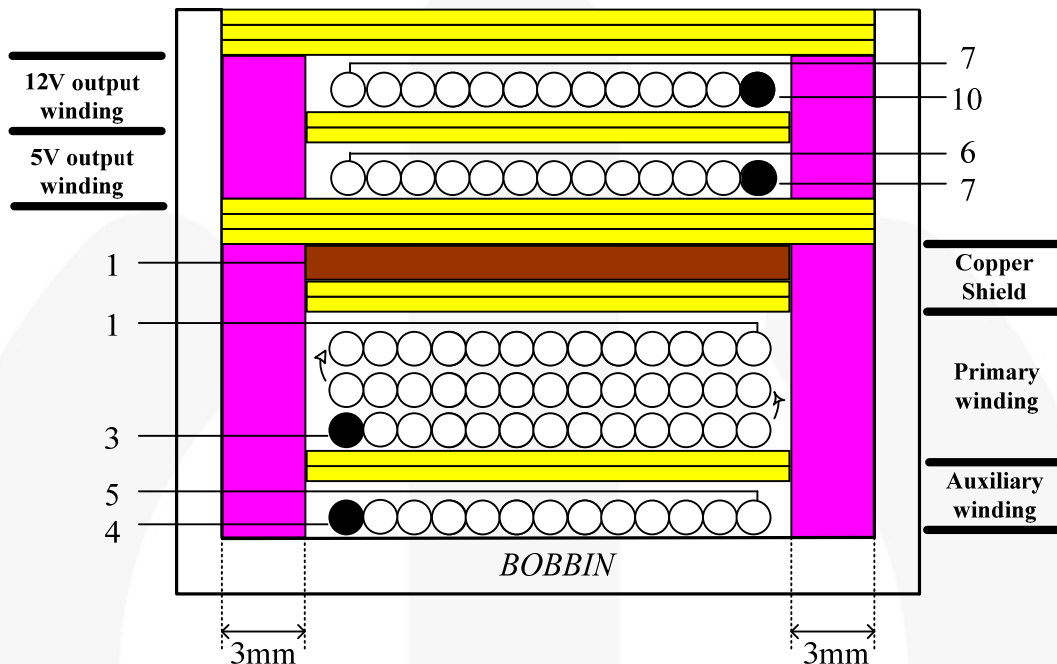

1. When W2 is winding, it should be 3 layers.
2. When W4 is winding, it must wind one layer.
3. When COPPER SHIELD is winding, 3mm barrier tape must exist both primary and secondary side.

| NO | TERMINAL |   | WIRE               | Ts  | INSULATION |     | BARRIER |  |
|----|----------|---|--------------------|-----|------------|-----|---------|--|
|    | S        | F |                    |     | Ts         | pri | sec     |  |
| W1 | 4        | 5 | 2UEW 0.33*2        | 13  | 2          | 3mm | 3mm     |  |
| W2 | 3        | 1 | 2UEW 0.3*1         | 81  | 2          | 3mm | 3mm     |  |
| W3 | 1        | - | COPPER SHIELD      | 1.2 | 3          | 3mm | 3mm     |  |
| W4 | 7        | 6 | 2UEW 0.37*4        | 6   | 2          | 3mm | 3mm     |  |
| W5 | 10       | 7 | 2UEW 0.42*3        | 7   | 3          | 3mm | 3mm     |  |
|    |          |   | CORE ROUNDING TAPE |     | 3          |     |         |  |

| UNIT   | m/m          | DRAWN                        | CHECK          | TITLE      | TRANS    |
|--|--------------|------------------------------|----------------|------------|----------|
| TEL  | (02)29450588 | Ci wun Chen                  | Guo long Huang | IDENT N.O. | TRN-0310 |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO.,LTD. |                | D W G N.O. | I2509    |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                              |                |            |          |

|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0310 |
| DATE     | 05/05/2011 | Version | A | Page | 3/4      |

### 3.ELECTRICAL SPECIFICATION

3.Inductance test: at 67KHz ,1.0V

P(5-4) : 1.4 mH +-5%

3.2 DC Resistance test at 25°C

P(3-1):.1.17Ohmo max      P(10-6) : 44.94Ohmo max

P(4-5): 78.96 Ohmo max

3.3 Hi-pot test:

AC 2.0K V /60Hz/5mA hi-pot for one minute between primary to secondary.

AC 1.0K V /60Hz/5mA hi-pot for one minute between primary to core.

AC 1.0K V /60Hz/5mA hi-pot for one minute between secondary to core.

3.4 Insulation test :

The insulation resistance is between pri to sec and windings to core measured by DC 500V, must be over 100MOhm.

3.5 Terminal strength :

1.5Kg on terminals for 10 seconds, test the breakdown.

| UNIT   | m/m          | DRAWN                        | CHECK          | TITLE      | TRANS    |
|--|--------------|------------------------------|----------------|------------|----------|
| TEL  | (02)29450588 | Ci wun Chen                  | Guo long Huang | IDENT N.O. | TRN-0310 |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO.,LTD. |                | D W G N.O. | I2509    |
| No.26-1, Lane 128, Sec. 2, Singnan Rd., Jhonghe City, Taipei County 235, Taiwan (R.O.C.) |              |                              |                |            |          |

### SPECIFICATION APPROVAL

|          |            |         |   |      |          |
|----------|------------|---------|---|------|----------|
| Customer |            |         |   | P/N: | TRN-0310 |
| DATE     | 05/05/2011 | Version | A | Page | 4/4      |

#### 4. MATERIALS LIST

| COMPONENT           | MATERIALS                        | MANUFACTURE   | FILE NO.      |
|---------------------|----------------------------------|---|---------------|
| 1.Bobbin            | Phenolic<br>94V-<br>0,T373J,150□ | EF-25(TF-2502)<br>Chang Chun plastics CO.,LTD         | E59481(S)     |
| 2.Core              | PC-40,BH2,2E6<br>3C85,MZ-4       | Ferrite core EF-25<br>TDK,Tokin.Tomita.Philip.Nicera. |               |
| 3.Wire              | UEWE<br>130□                     | Tai-I electronic wire & cable CO.,LTD                 | E85640 ( S )  |
|                     | UEW-2<br>130□                    | Jung Shing wire CO.,LTD                               | E174837       |
|                     | UEW-B<br>130□                    | Chuen Yih wire CO.,LTD                                | E154709 ( S ) |
| 4.Varnish           | BC-346A<br>180□                  | John C Dolph CO.,LTD.                                 | E51047 ( M )  |
|                     | 468-2FC<br>130□                  | Ripley Resin Engineering Co Inc.                      | E81777 ( N )  |
| 5.Tape<br>t=0.064mm | 31CT 130□                        | Nitto Denk Corp                                       | E34833 ( M )  |
|                     | Polyester 3M<br>#1350(b) 130□    | Minnesota Mining &MFG CO.,LTD<br>CTI Material Group□  | E17385 ( N )  |
| 6.Tube              | Teflon tube<br>TFL<br>150V,200□  | Great Holding Industrial CO.,LTD                      | E156256 ( S ) |
| 7.Terminals         | Tin coated-<br>Copper wire       | Will for special wire CORP                            |               |
| 8.Shield            | Copper foil                      | Hitachi cable ltd.<br>(copper foil : 0.025tx9mm+TAPE) |               |

| UNIT   | m/m          | DRAWN                        | CHECK          | TITLE         | TRANS    |
|--|--------------|------------------------------|----------------|---------------|----------|
| TEL  | (02)29450588 | Ci wun Chen                  | Guo long Huang | IDENT<br>N O. | TRN-0310 |
| FAX  | (02)29447647 | SEN HUEI INDUSTRIAL CO.,LTD. |                | D W G<br>N O. | I2509    |
| No.26-1, Lane 128, Sec. 2,<br>Singnan Rd., Jhonghe City, Taipei<br>County 235, Taiwan (R.O.C.) |              |                              |                |               |          |

## 10. Bill of Materials

| Component                                | Qty. | Part Number | Manufacturer            | Reference                                |
|--|------|-------------|-------------------------|--|
| JUMPER WIRE 0.6*52mm                     | 1    |             |                         | JP1                                      |
| Metal Oxide Film Resistor 2W-S 100KΩ ±5% | 1    |             |                         | R104                                     |
| Chip Resistor 0805 0Ω ±5%                | 1    |             |                         | R105                                     |
| Chip Resistor 0805 510Ω ±5%              | 1    |             |                         | R205                                     |
| Chip Resistor 0805 9K1Ω ±1%              | 1    |             |                         | R106                                     |
| Chip Resistor 0805 12K1Ω ±1%             | 1    |             |                         | R207                                     |
| Chip Resistor 0805 30KΩ ±5%              | 1    |             |                         | R208                                     |
| Chip Resistor 1206 2K7Ω ±5%              | 1    |             |                         | R204                                     |
| Chip Resistor 1206 12K1Ω ±1%             | 1    |             |                         | R206                                     |
| Chip Resistor 1206 68KΩ ±5%              | 1    |             |                         | R103                                     |
| NTC 8φ 5Ω SCK053                         | 1    |             |                         | RT101                                    |
| Ceramic Capacitor 472P 1KV +80/-20%      | 1    |             |                         | C104                                     |
| 0805 MLCC X7R ±10% 103P 50V              | 1    |             |                         | C107                                     |
| 0805 MLCC X7R ±10% 104P 50V              | 2    |             |                         | C106, C207                               |
| Electrolytic Capacitor 47μF 50V 105°C    | 1    | 8*11        | Jakycon                 | C105                                     |
| Electrolytic Capacitor 47μF 400V 105°C   | 1    | 18*20 WXA   | Rubycon                 | C103                                     |
| Electrolytic Capacitor 470μF 25V 105°C   | 2    | 10*16       | NCC                     | C202, C203                               |
| Electrolytic Capacitor 1000μF 10V 105°C  | 2    | 8*16 GK     | SAMXON                  | C205 C206                                |
| X2 Capacitor 0.1μF 275V ±20%             | 1    |             |                         | C101                                     |
| Y1 Capacitor 102P 250V ±20%              | 1    |             |                         | CY301                                    |
| Inductor DR6X8 5μH                       | 2    | TRN0216     | SEN HUEI                | L201A, L202A                             |
| Inductor UU9.8 50mH                      | 1    | TRN0177     | SEN HUEI                | LF101                                    |
| Transformer EF-25-H 1.4mH                | 1    | TRN0310     | SEN HUEI                | T301                                     |
| Diode 1A/700V DO-41                      | 6    | 1N4007      | Fairchild Semiconductor | D101, D102,<br>D103, D104,<br>D105, D106 |
| Schottky Diode 3A/100V DO-201AD          | 1    | SB3100      | Fairchild Semiconductor | D201                                     |
| Schottky Diode 3A/60V DO-201AD           | 1    | SB360       | Fairchild Semiconductor | D202                                     |
| IC FOD817B DIP                           | 1    |             | Fairchild Semiconductor | IC301                                    |
| REGULATOR KA431L ±0.5%                   | 1    |             | Fairchild Semiconductor | IC201                                    |
| IC FSL126MR DIP                          | 1    |             | Fairchild Semiconductor | IC101                                    |
| FUSE BUSS SR-5 1A/250V                   | 1    |             |                         | F101                                     |
| Varistor 10φ470V                         | 1    |             |                         | RV101                                    |
| PCB PLM0146 REV0                         | 1    |             |                         |  |

## 11. Revision History

| Rev.  | Date       | Description   |
|-------|------------|---|
| 1.0.0 |            | Change User Guide EVB number from FEB432001 to FEBFSL126MR_H432v1 |
| 1.0.1 | March 2012 | Formatting & editing pass by Tech Docs prior to posting           |
|       |            |   |
|       |            |   |

### WARNING AND DISCLAIMER

Replace components on the Evaluation Board only with those parts shown on the parts list (or Bill of Materials) in the Users' Guide. Contact an authorized Fairchild representative with any questions.

This board is intended to be used by certified professionals, in a lab environment, following proper safety procedures. Use at your own risk. The Evaluation board (or kit) is for demonstration purposes only and neither the Board nor this User's Guide constitute a sales contract or create any kind of warranty, whether express or implied, as to the applications or products involved. Fairchild warrants that its products meet Fairchild's published specifications, but does not guarantee that its products work in any specific application. Fairchild reserves the right to make changes without notice to any products described herein to improve reliability, function, or design. Either the applicable sales contract signed by Fairchild and Buyer or, if no contract exists, Fairchild's standard Terms and Conditions on the back of Fairchild invoices, govern the terms of sale of the products described herein.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION.

| As  | used | herein:1.  |
|---|------|--|
| Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user. |      | 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness. |

### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

### EXPORT COMPLIANCE STATEMENT

These commodities, technology, or software were exported from the United States in accordance with the Export Administration Regulations for the ultimate destination listed on the commercial invoice. Diversion contrary to U.S. law is prohibited.

U.S. origin products and products made with U.S. origin technology are subject to U.S. Re-export laws. In the event of re-export, the user will be responsible to ensure the appropriate U.S. export regulations are followed.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fairchild Semiconductor:](#)

[FEBFSL126MR\\_H432V1](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331