


REV.	SHEET 1 OF 4	DOCUMENT NO. 10-597878-()	
		LTR	DATE
A		INITIAL RELEASE	1/25/10
B		(CL 11) SEE CHG NOTICE ECN: B1963-0000	12/12/11
C		(CL 11) SEE CHG NOTICE ECN: B5923-0000	6/14/13
D		(CL 11) SEE CHG NOTICE ECN: B6621-0000	1/22/14
E		(CL 11) ADDED -93 & -094 ECN: B7821-0000	2/26/14
F		(CL 11) SEE CHG NOTICE ECN: B8395-0000	4/30/14
G		(CL 11) SEE CHG NOTICE ECN: C0271-0000	4/18/16

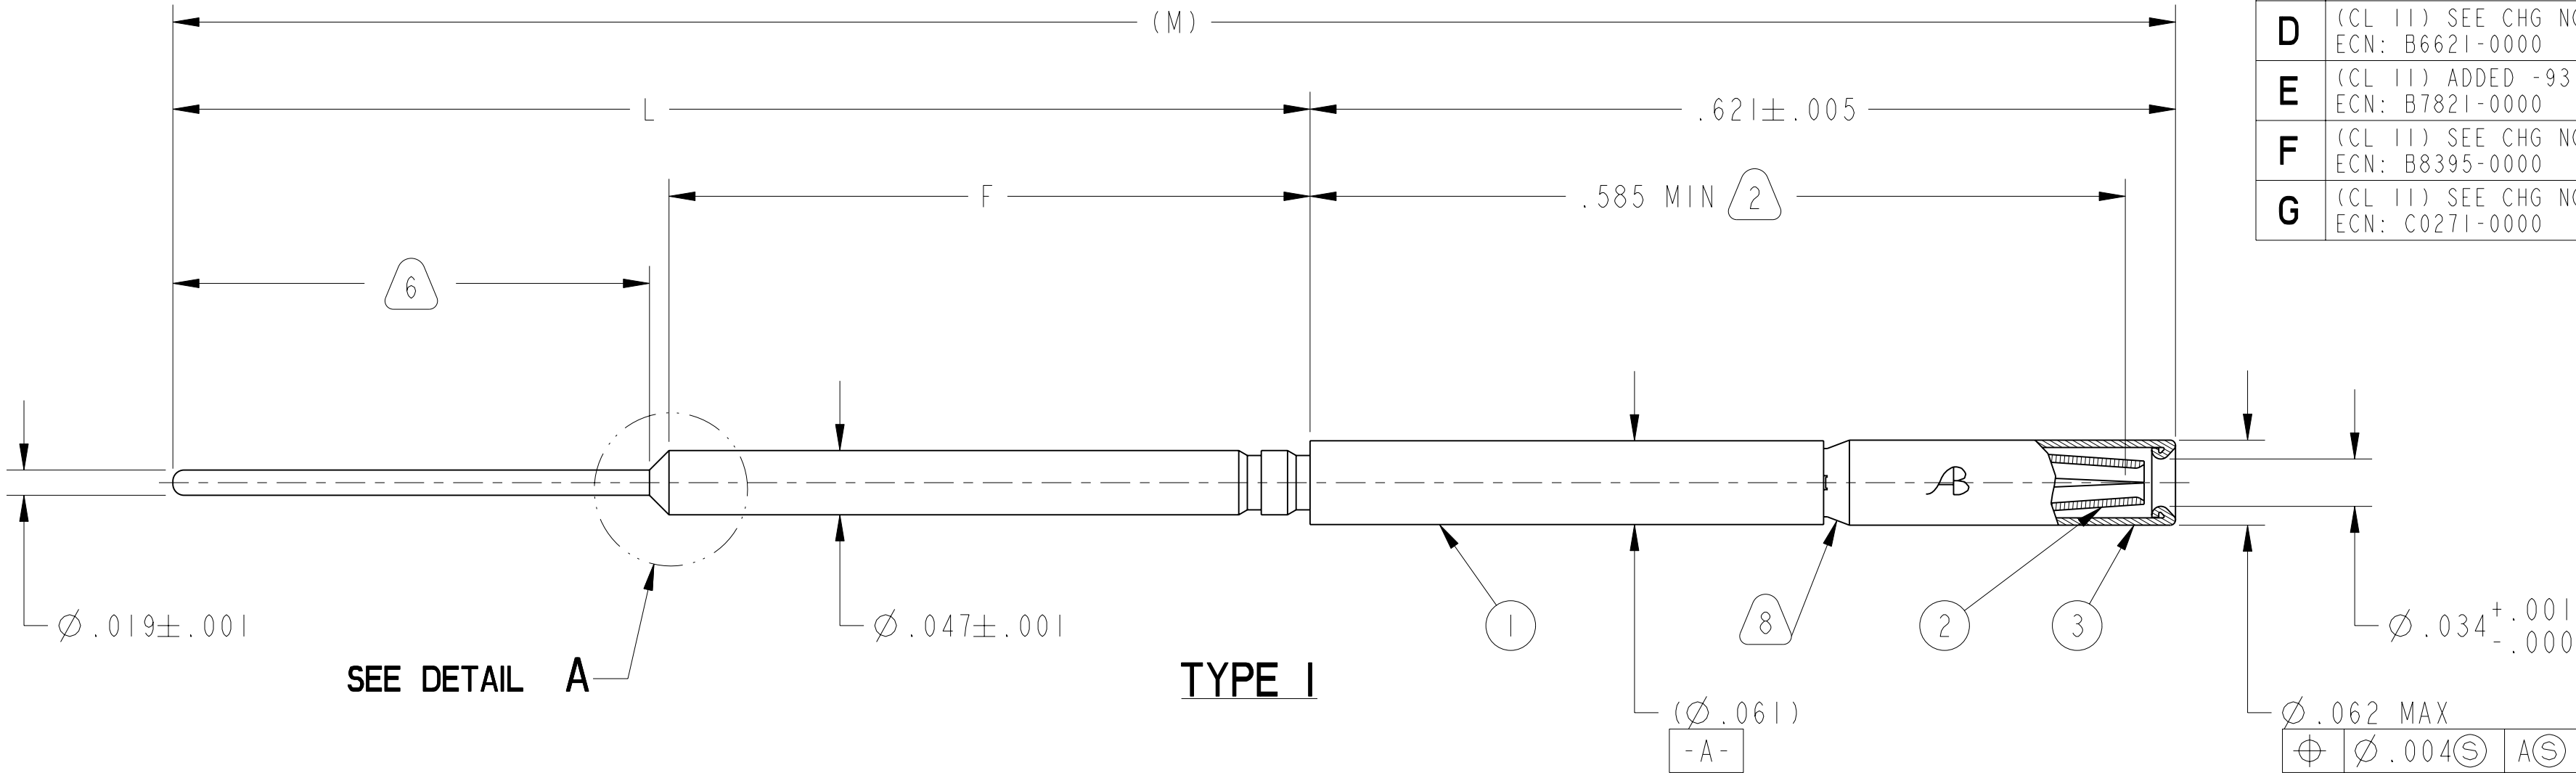

8 CRIMP SLEEVE AND SPRING TIGHTLY TO BODY PER 9-9383. A 15 POUND AXIAL LOAD SHALL NOT DISLODGE SPRING. SLEEVE SHALL WITHSTAND A .4 IN-OZ TORQUE WITHOUT SPINNING.

7. SPECIFIED GENERAL TOLERANCES:

$\pm .005$

6 INDICATED AREA MEETS THE SOLDERABILITY REQUIREMENTS OF MIL-STD-202, METHOD 208.

5. MEETS THE APPLICABLE REQUIREMENTS OF M39029/56.

4. ALL DIMENSIONS ARE AFTER PLATING.

3. PROCESS SPEC:
ASSY 9-9383
TEST 9-5272-16

2 INDICATED DIMENSION TO BE FROM SHOULDER TO POINT OF ENGAGEMENT OF SPRING AND A.0300±.0002 DIAMETER SQUARE ENDED PIN.

1. A.0305+.0002-.0000 DIA HARDENED STEEL PIN SHALL ENGAGE SOCKET WITH A FORCE NOT GREATER THAN 9.5 OZ. A .0295+.0000-.0002 DIAMETER HARDENED STEEL PIN SHALL DISENGAGE SOCKET WITH A FORCE NOT LESS THAN 1.25 OZ. DEPTH OF ENGAGEMENT OF PINS SHALL BE .116 MIN. FROM FRONT OF CONTACT. PINS SHALL HAVE A SPHERICAL TIP AND A 3/ FINISH.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

N/A

NEXT ASSEMBLY

PRO/ENGINEER INFORMATION	
Pro/e Model Used:	10-597878.ASSEM
Drawing Name:	10-597878

10. SOCKET SPRING TINES (ITEM 2) ARE GOLD PLATED PER AS39029 REQUIREMENTS.

9 TO COMPLETE PART NUMBER, ADD APPLICABLE SUFFIX DIGIT FOR CONTACT BODY FINISH

SUFFIX DIGIT


I
5
D

FINISH

GOLD 20-30 MICROINCHES
GOLD 9-7362-5
GOLD 9-7362-D

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ±.0005 ANGLES= ±2° .XXX = ±.010 .XX = ±.03 .X = ±.1 ----- DIM.& TOL. PER ASME Y14.5M; DRM PER MIL-DTL-31000; OTHER Amphenol Stds. PER 9-3800 LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY	MATERIAL SPEC. N/A
	PROCESS SPEC. SEE NOTE 3

3	I	10-407914-22B	SLEEVE	8
2	I	10-597871-725	SPRING	8
I	I	10-597879-()	CONTACT BODY	
POS	QTY	PART NUMBER	DESCRIPTION	NOTE

		PARTS LIST			
APPROVALS		DATE	AMPHENOL CORPORATION 40-60 DELAWARE AVENUE SIDNEY, N.Y. 13838		
PREPARED BY HTANG		20-Feb-09			
ENGINEER IN CHARGE LRATCHFORD					
DESIGN MANAGER HJOHNSON					
DESIGN ACTIVITY GROUP MIL-AER DEVELOP					
THIRD ANGLE PROJECTION		CONTACT, SOCKET, ELECTRICAL CONNECTOR SIZE 22D, TYPE LJT-R, HYBRID, PCB			
		SIZE C	CAGE CODE 77820	DOCUMENT NO. 10-597878-()	REV. G
SCALE: 10.0		REF. 10-597872-451		SHEET 1 OF 4	

[illegible]

10-597878-()

SHEET 3 OF 4

REV. G

DOCUMENT NO.

10-597878-()

4

3

2

10-597878-()

ASSEMBLY NUMBER

BODY

F

L

(M)

TYPE

10-597878-31()

10-597879-31()

.460^{+.000}_{-.015}

.783±.005

1.406

I

10-597878-32()

10-597879-32()

.804±.005

1.129±.003

1.752

10-597878-33()

10-597879-33()

.479±.005

.754±.003

1.377

10-597878-34()

10-597879-34()

.460±.005

1.203±.003

1.826

10-597878-35()

10-597879-35()

.450±.005

.880±.005

1.503

II

10-597878-36()

10-597879-36()

.520±.003

.747±.005

1.370

10-597878-37()

10-597879-37()

.730±.003

.830±.002

1.453

10-597878-38()

10-597879-38()

.460^{+.000}_{-.015}

1.017±.003

1.640

I

10-597878-39()

10-597879-39()

1.577±.005

1.687±.005

2.310

10-597878-40()

10-597879-40()

.280^{+.000}_{-.015}

.782±.005

1.405

II

10-597878-41()

10-597879-41()

.588^{+.003}_{-.000}

.730±.003

1.353

10-597878-42()

10-597879-42()

.623±.005

.748±.005

1.371

10-597878-43()

10-597879-43()

.340±.005

.460±.005

1.083

I

10-597878-44()

10-597879-44()

.280^{+.000}_{-.015}

.782±.005

1.405

10-597878-45()

10-597879-45()

1.450^{+.000}_{-.015}

2.167±.003

2.790

10-597878-46()

10-597879-46()

.520±.005

.833±.002

1.456

10-597878-47()

10-597879-47()

.600±.003

.700±.003

1.323

II

10-597878-48()

10-597879-48()

.280^{+.000}_{-.015}

.550±.005

1.173

10-597878-49()

10-597879-49()

.280±.005

.805±.005

1.428

I

10-597878-50()

10-597879-50()

.257±.005

.503±.005

1.126

10-597878-51()

10-597879-51()

.280^{+.000}_{-.015}

.715±.005

1.338

I

10-597878-52()

10-597879-52()

.580±.003

.830±.005

1.453

10-597878-53()

10-597879-53()

.460^{+.000}_{-.015}

.965±.003

1.588

10-597878-54()

10-597879-54()

.479±.005

1.054±.005

1.677

II

10-597878-55()

10-597879-55()

.750±.005

1.060±.005

1.683

10-597878-56()

10-597879-56()

.800±.005

.986±.005

1.609

10-597878-57()

10-597879-57()

.280^{+.000}_{-.015}

.420±.003

1.043

I

10-597878-58()

10-597879-58()

.637±.003

1.075±.004

1.698

10-597878-59()

10-597879-59()

.460^{+.000}_{-.015}

.850±.005

1.473

I

10-597878-60()

10-597879-60()

.600±.005

.938±.005

1.561

10-597878-61()

10-597879-61()

.410±.003

.690±.003

1.313

II

10-597878-62()

10-597879-62()

.438±.005

.754±.003

1.377

10-597878-63()

10-597879-63()

.280^{+.000}_{-.015}

.825±.005

1.448

I

10-597878-64()

10-597879-64()

.590±.005

.901±.005

1.524

10-597878-65()

10-597879-65()

.460±.005

.915±.005

1.538

10-597878-66()

10-597879-66()

.460±.005

.645±.003

1.268

10-597878-67()

10-597879-67()

.280±.005

1.015±.005

1.638

I

10-597878-68()

10-597879-68()

.735±.005

1.169±.005

1.792

10-597878-69()

10-597879-69()

.376±.005

.995±.005

1.618

9

9

NOTES: SEE SHEET 1

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

10-597878-()

SHEET 3 OF 4

REV. G

4

3

2

1

IMAGED / Apr . 19 2016, 11:54:03 AM

3

2

1

10-597878-()

SHEET 3 OF 4

REV. G

SIZE C

CAGE CODE 77820

DOCUMENT NO. 10-597878-()

REV. G

SCALE: 6.0

REF: 10-597872-451

SHEET 3 OF 4

4				3			2			10-597878-()			



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331