



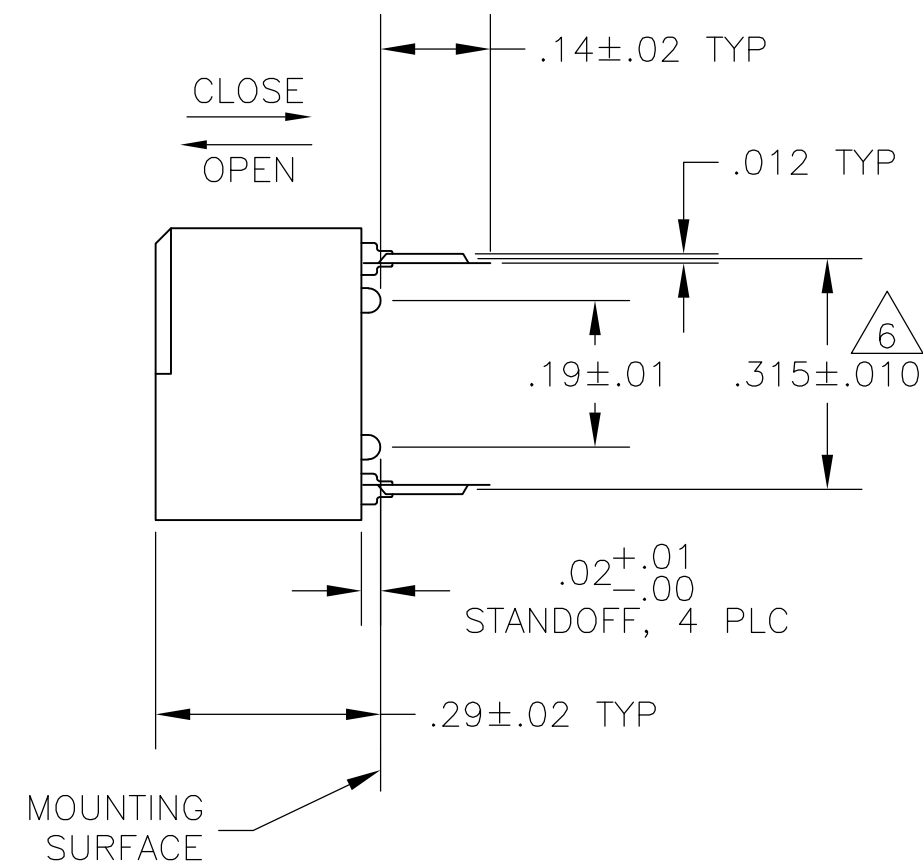

	NO POSITION MARKING.
	NO PART NO. MARKING.
	STRIPPABLE TAPE SEAL, SEE FIGURE 8.
	OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

- 1 FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- 2 SWITCH SHOWN IN OPEN POSITION.
- 3 ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- 4 STAMPING WILL VARY ON 2 AND 3 POSITION TOPS DUE TO SPACE RESTRICTIONS.
- 5 STRIPPABLE TRANSPARENT SEAL, SEE FIG 6.
- 6 .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300^{+.010}_{-.000} AT MOUNTING SURFACE.

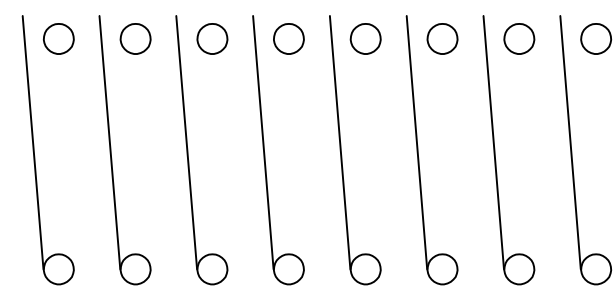

CONTACT ARRANGEMENT

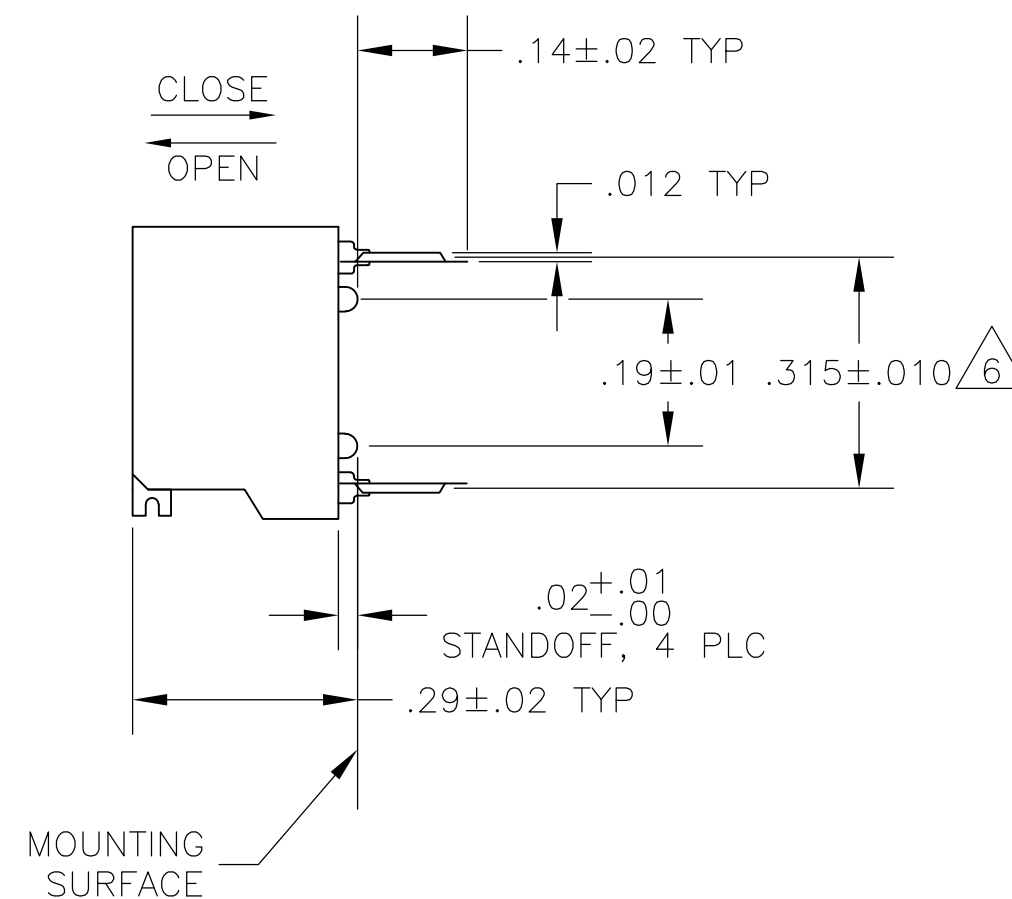


FIG 2

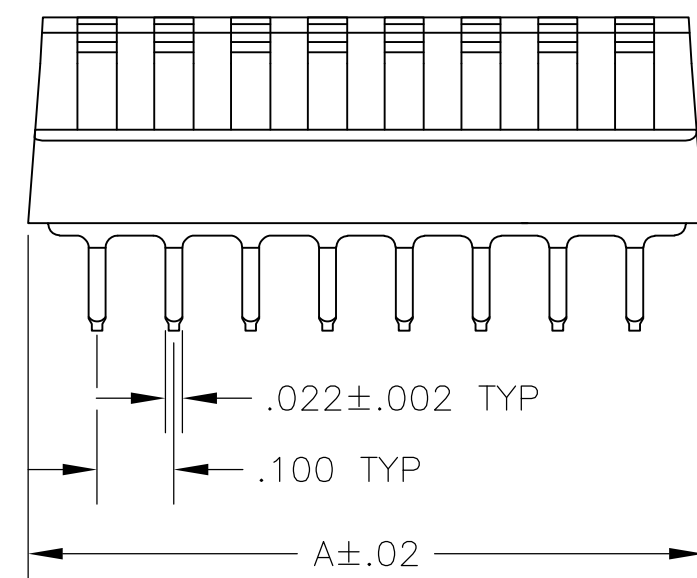


		FIG 2	FIG 3A& 7	—	1.08	10	6—435802—3
		FIG 1	FIG 3B		.88	8	3—435802—8
	SUPSD BY 1—435802—6	—FIG 2	 		.58	5	3—435802—1
	 OBSOLETE	—FIG 2	 		.88	8	3—435802—0
	SUPSD BY 2—5435802—9	—FIG 2	 		.48	4	2—435802—9
	SUPSD BY 1—435802—0	—FIG 1		—	.28	2	2—435802—8
	OBSOLETE	FIG 1			.28	2	2—435802—7
	OBSOLETE	FIG 2			1.08	10	2—435802—6
	OBSOLETE	FIG 2	FIG 4	—	.88	8	2—435802—5
	OBSOLETE	FIG 2			.88	8	2—435802—4
	OBSOLETE	FIG 2	FIG 3A& 5	—	.48	4	2—435802—3
		FIG 2	FIG 3A		1.28	12	2—435802—2
		FIG 2			1.18	11	2—435802—1
		FIG 2			1.08	10	2—435802—0
		FIG 2			.98	9	1—435802—9
		FIG 2			.78	7	1—435802—8
		FIG 2			.68	6	1—435802—7
		FIG 2			.58	5	1—435802—6
		FIG 2			.48	4	1—435802—5
	SUPSD BY 435802—2	—FIG 2			.38	3	1—435802—4
	SUPSD BY 3—1437590—2	—FIG 1	FIG 3B		.28	2	1—435802—3
	 OBSOLETE	—FIG 2		—	1.28	12	1—435802—2
		FIG 1	FIG 3B	—	.28	2	1—435802—0
		FIG 2	FIG 3A		.88	8	435802—9
		FIG 2		—	1.08	10	435802—8
	SUPSD BY 5435802—7	—FIG 2		—	.98	9	435802—7
		FIG 2		—	.78	7	435802—6
		FIG 2		—	.68	6	435802—5
		FIG 2		—	.58	5	435802—4
		FIG 2		—	.48	4	435802—3
		FIG 2		—	.38	3	435802—2
	435802—1 SHOWN	FIG 2	FIG 3A	—	.88	8	435802—1
		HOUSING	MARKING	PROTECTIVE SEAL	A	NO OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TALLEY 9-19-89		 TE Connectivity	
		CHK R. MILLER 9-19-89			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± -.005 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD H. LEITER 9-19-89	
		PRODUCT SPEC -		NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED	
		APPLICATION SPEC -			
MATERIAL HOUSING & ROCKERS: POLYESTER CONTACTS: BERYLLIUM COPPER		FINISH CONTACTS; PLATED .000030 MIN GOLD IN CONTACT AREA OVER .000050 MIN NICKEL		SIZE A2	CAGE CODE 00779
		WEIGHT -		DRAWING NO C-435802	
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 of 2
				REV A1 2	

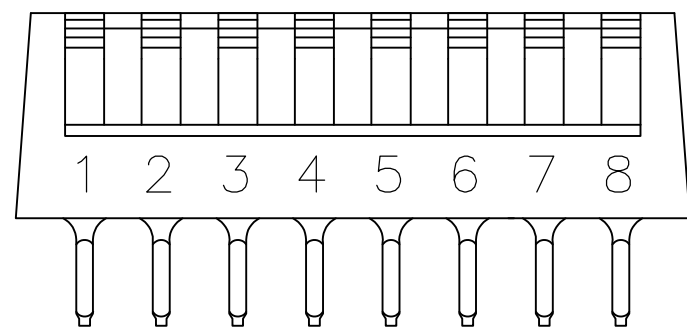


FIG 3A

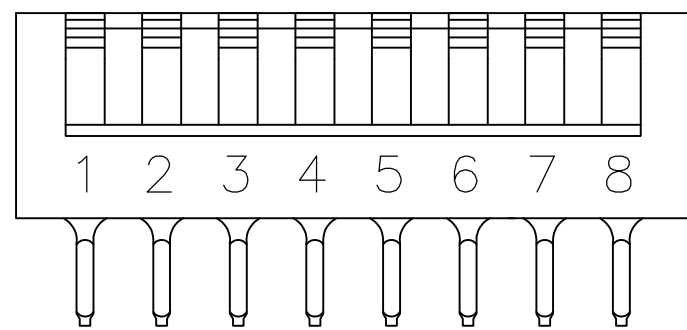


FIG 3B

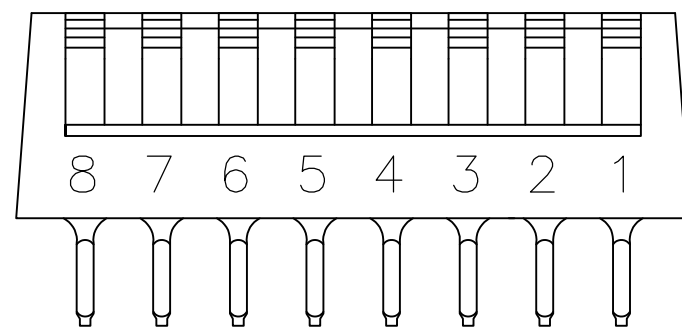


FIG 4


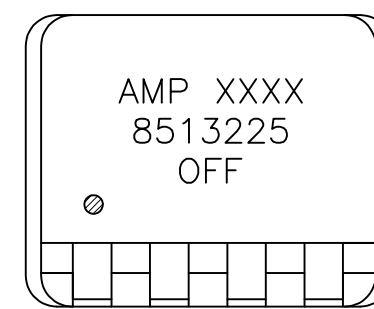


FIG 5

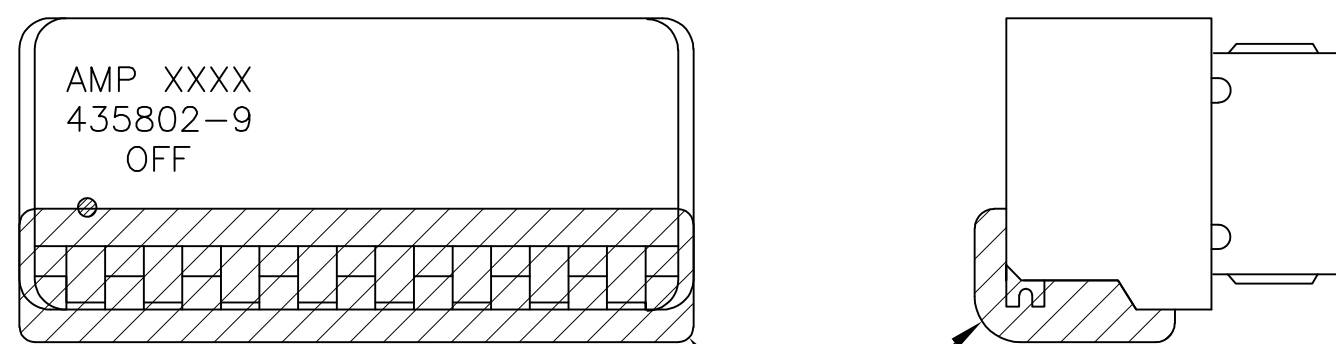

PROTECTIVE SEAL

FIG 6


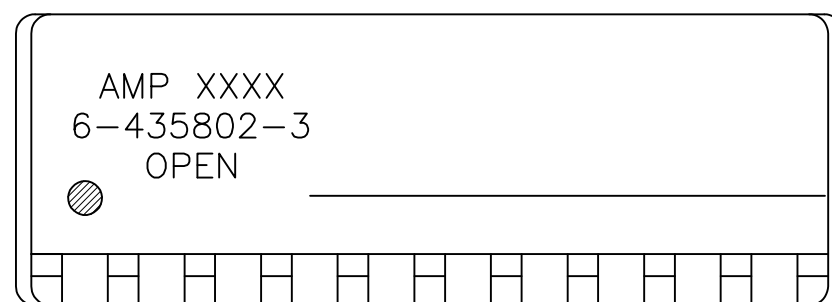



FIG 7

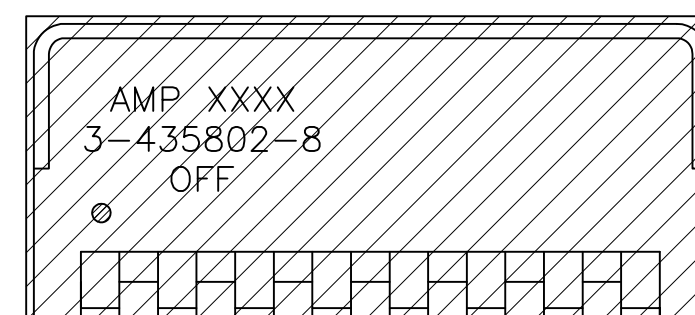

PROTECTIVE SEAL

FIG 8

 $.010 \pm .010$ $.005^{+.010}_{-.005}$
TYP

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TALLEY 9-19-89	 TE Connectivity			
DIMENSIONS: INCHES		CHK R. MILLER 9-19-89				
		APVD H. LEITER 9-19-89	NAME SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE A2		CAGE CODE 00779	DRAWING NO C-435802
MATERIAL SEE SHEET 1		WEIGHT -	RESTRICTED TO -		SCALE 4:1	
FINISH SEE SHEET 1		CUSTOMER DRAWING	SHEET 2 OF 2		REV AL2	



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331