


# GW P7STA1.EM

## OSCONIQ® P 7070

Ultra high power LED with high performance, superior robustness and long lifetime.



### Applications

- Architecture
- Area Lights
- Highbay Industrial
- Street, Tunnel and Outdoor

### Features:

- Package: New SMD epoxy package with silicone lens
- Typ. Radiation: 120° (Lambertian emitter)
- Color temperature: 2700K - 5700K
- CRI: 80 (min.), 82 (typ.)
- ESD: 8 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 3B)
- Luminous Flux: typ. 1032 lm @ 3000 K, 85 °C
- Luminous efficacy : typ. 128 lm/W @ 3000 K, 85 °C

## Ordering Information

| Type                     | Color temperature | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>$\Phi_V$ | Ordering Code |
|--------------------------|-------------------|-------------------------------------------------------------------|---------------|
| GW P7STA1.EM-UGUH-27S5-1 | 2700 K            | 920 ... 1000 lm                                                   | Q65112A6672   |
| GW P7STA1.EM-UHUU-27S5-1 | 2700 K            | 960 ... 1040 lm                                                   | Q65112A6671   |
| GW P7STA1.EM-UHUU-30S5-1 | 3000 K            | 960 ... 1040 lm                                                   | Q65112A6670   |
| GW P7STA1.EM-UJVF-30S5-1 | 3000 K            | 1000 ... 1080 lm                                                  | Q65112A6669   |
| GW P7STA1.EM-UJVF-35S5-1 | 3500 K            | 1000 ... 1080 lm                                                  | Q65112A6668   |
| GW P7STA1.EM-VFVG-35S5-1 | 3500 K            | 1040 ... 1120 lm                                                  | Q65112A6667   |
| GW P7STA1.EM-VFVG-40S5-1 | 4000 K            | 1040 ... 1120 lm                                                  | Q65112A6666   |
| GW P7STA1.EM-VFWH-40S4-1 | 4000 K            | 1040 ... 1320 lm                                                  | Q65112A6991   |
| GW P7STA1.EM-VGVH-40S5-1 | 4000 K            | 1080 ... 1160 lm                                                  | Q65112A6663   |
| GW P7STA1.EM-VFVG-50S5-1 | 5000 K            | 1040 ... 1120 lm                                                  | Q65112A6665   |
| GW P7STA1.EM-VGVH-50S5-1 | 5000 K            | 1080 ... 1160 lm                                                  | Q65112A6662   |
| GW P7STA1.EM-VFVG-57S5-1 | 5700 K            | 1040 ... 1120 lm                                                  | Q65112A6664   |
| GW P7STA1.EM-VGVH-57S5-1 | 5700 K            | 1080 ... 1160 lm                                                  | Q65112A6661   |

## Maximum Ratings

| Parameter                                                                            | Symbol    |              | Values            |
|--------------------------------------------------------------------------------------|-----------|--------------|-------------------|
| Operating Temperature                                                                | $T_{op}$  | min.<br>max. | -40 °C<br>125 °C  |
| Storage Temperature                                                                  | $T_{stg}$ | min.<br>max. | -40 °C<br>125 °C  |
| Junction Temperature                                                                 | $T_j$     | max.         | 135 °C            |
| Forward Current<br>$T_j = 85\text{ °C}$                                              | $I_F$     | min.<br>max. | 200 mA<br>1050 mA |
| Surge Current<br>$t \leq 10\text{ }\mu\text{s}$ ; $D = 0.005$ ; $T_j = 85\text{ °C}$ | $I_{FS}$  | max.         | 1500 mA           |
| Reverse current <sup>2)</sup>                                                        | $I_R$     | max.         | 200 mA            |
| ESD withstand voltage<br>acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 3B)              | $V_{ESD}$ |              | 8 kV              |

## Characteristics

$I_F = 700 \text{ mA}$ ;  $T_J = 85 \text{ °C}$

| Parameter                                                                                     | Symbol                  |                      | Values                        |
|-----------------------------------------------------------------------------------------------|-------------------------|----------------------|-------------------------------|
| Viewing angle at 50% $I_V$                                                                    | $2\phi$                 | typ.                 | 120 °                         |
| Forward Voltage <sup>3)</sup>                                                                 | $V_F$                   | min.<br>typ.<br>max. | 10.50 V<br>11.50 V<br>12.00 V |
| Reverse voltage (ESD device)                                                                  | $V_{R\text{ ESD}}$      | min.                 | 45 V                          |
| Reverse voltage <sup>2)</sup><br>$I_R = 20 \text{ mA}$                                        | $V_R$                   | max.                 | 1.2 V                         |
| Color Rendering Index <sup>4)</sup><br>(2700K - 5700K)                                        | CRI                     | min.<br>typ.         | 80<br>82                      |
| Electrical thermal resistance junction/solderpoint<br>with efficiency $\eta_e = 39 \text{ %}$ | $R_{thJS\text{ elec.}}$ | typ.                 | 0.52 K / W                    |


## Brightness Groups

| Group | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>min.<br>$\Phi_V$ | Luminous Flux <sup>1)</sup><br>$I_F = 700 \text{ mA}$<br>max.<br>$\Phi_V$ |
|-------|---------------------------------------------------------------------------|---------------------------------------------------------------------------|
| UG    | 920 lm                                                                    | 960 lm                                                                    |
| UH    | 960 lm                                                                    | 1000 lm                                                                   |
| UJ    | 1000 lm                                                                   | 1040 lm                                                                   |
| VF    | 1040 lm                                                                   | 1080 lm                                                                   |
| VG    | 1080 lm                                                                   | 1120 lm                                                                   |
| VH    | 1120 lm                                                                   | 1160 lm                                                                   |
| VJ    | 1160 lm                                                                   | 1200 lm                                                                   |
| WF    | 1200 lm                                                                   | 1240 lm                                                                   |
| WG    | 1240 lm                                                                   | 1280 lm                                                                   |
| WH    | 1280 lm                                                                   | 1320 lm                                                                   |

## Forward Voltage Groups

| Group | Forward Voltage <sup>3)</sup><br>min.<br>$V_F$ | Forward Voltage <sup>3)</sup><br>max.<br>$V_F$ |
|-------|------------------------------------------------|------------------------------------------------|
| F5    | 10.50 V                                        | 11.00 V                                        |
| L4    | 11.00 V                                        | 11.40 V                                        |
| L5    | 11.00 V                                        | 11.50 V                                        |
| Q2    | 11.40 V                                        | 11.60 V                                        |
| R5    | 11.50 V                                        | 12.00 V                                        |
| S2    | 11.60 V                                        | 11.80 V                                        |

## Chromaticity Coordinate Groups <sup>5)</sup>

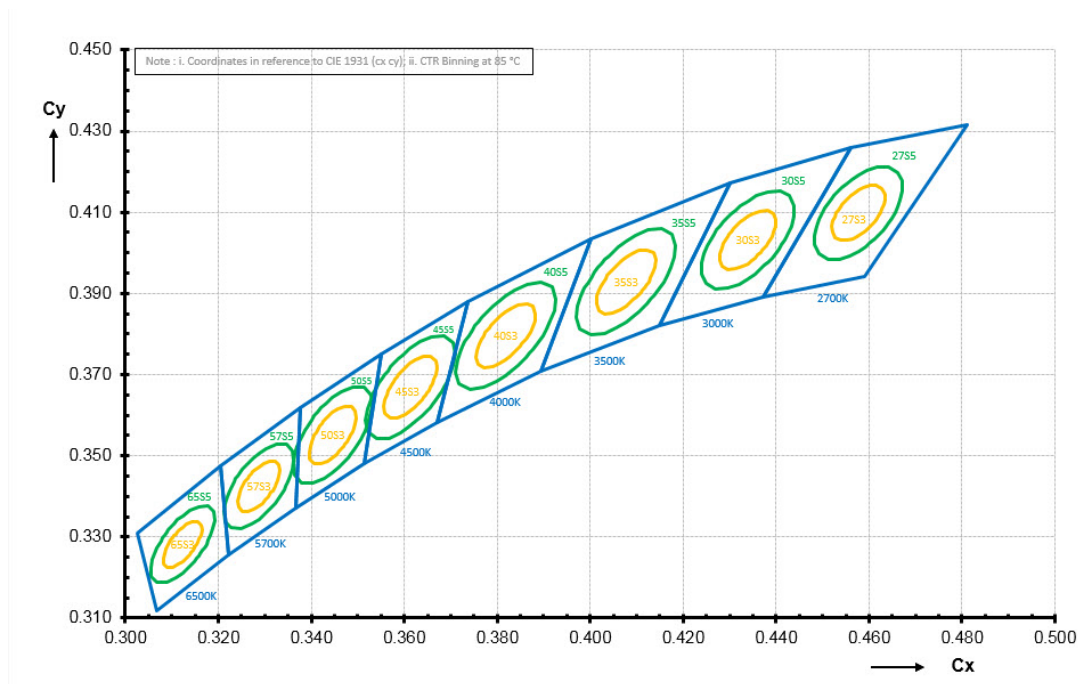

## Chromaticity Coordinate Groups

| CCT    | Center<br>Cx | Center<br>Cy | a      | b      | Ø    |
|--------|--------------|--------------|--------|--------|------|
| 27S3 K | 0.4577       | 0.4098       | 0.008  | 0.0041 | 54.1 |
| 27S5 K | 0.4577       | 0.4098       | 0.0133 | 0.0068 | 54.1 |
| 30S3 K | 0.4339       | 0.4032       | 0.0086 | 0.0042 | 53.7 |
| 30S5 K | 0.4339       | 0.4032       | 0.0142 | 0.0069 | 53.7 |
| 35S3 K | 0.4077       | 0.3929       | 0.0093 | 0.0042 | 53.9 |
| 35S5 K | 0.4077       | 0.3929       | 0.0155 | 0.0069 | 53.9 |
| 40S3 K | 0.3818       | 0.3796       | 0.0094 | 0.0041 | 53.4 |
| 40S5 K | 0.3818       | 0.3796       | 0.0157 | 0.0068 | 53.4 |
| 50S3 K | 0.3446       | 0.3551       | 0.0081 | 0.0035 | 59.8 |
| 50S5 K | 0.3446       | 0.3551       | 0.0135 | 0.0059 | 59.8 |
| 57S3 K | 0.3287       | 0.3425       | 0.0072 | 0.0032 | 58.8 |
| 57S5 K | 0.3287       | 0.3425       | 0.0119 | 0.0052 | 58.8 |

Group Name on Label


Example: UG-F5

|            |                 |
|------------|-----------------|
| Brightness | Forward Voltage |
| UG         | F5              |

Discontinued


## Relative Spectral Emission <sup>6)</sup>

$$\Phi_{\text{rel}} = f(\lambda); I_F = 700 \text{ mA}; T_J = 85 \text{ °C}$$

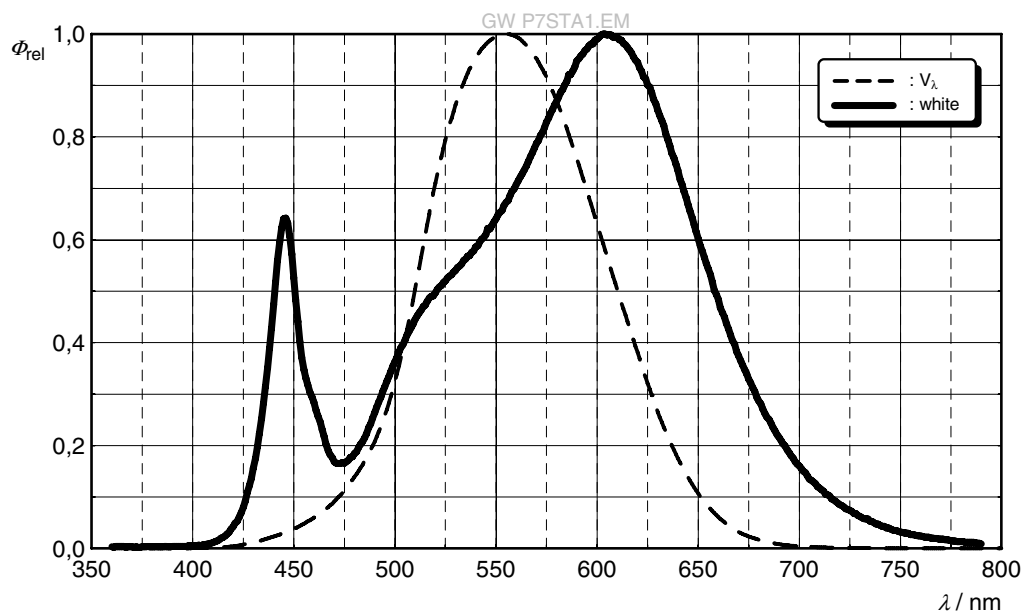


## Radiation Characteristics <sup>6)</sup>

$$I_{\text{rel}} = f(\phi); T_J = 85 \text{ °C}$$

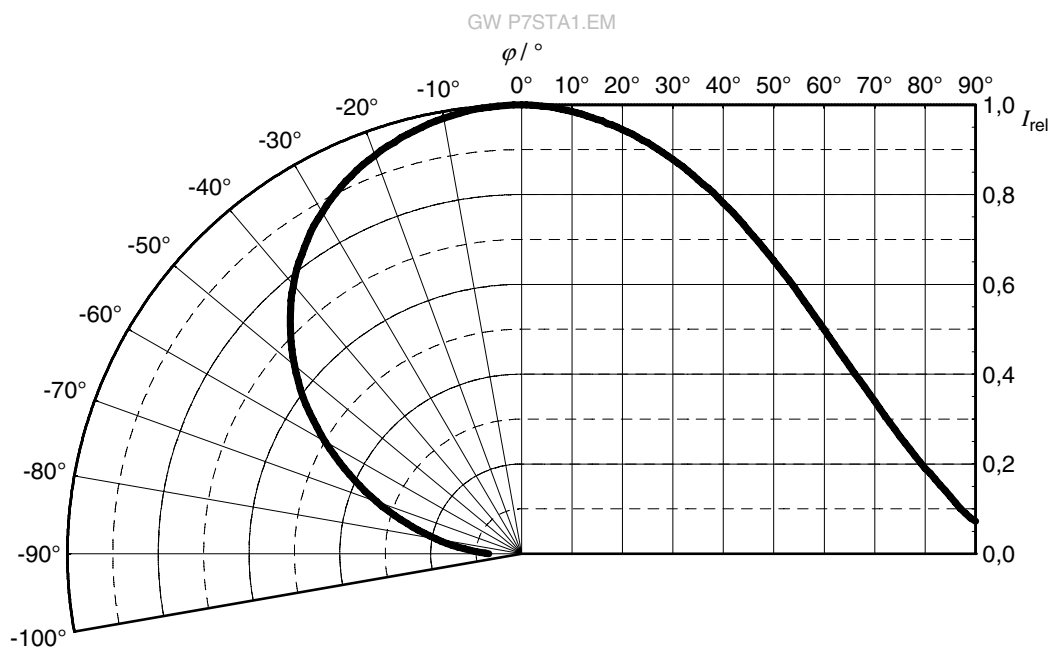


**Forward current** <sup>6), 7)</sup>


$$I_F = f(V_F); T_J = 85^\circ\text{C}$$

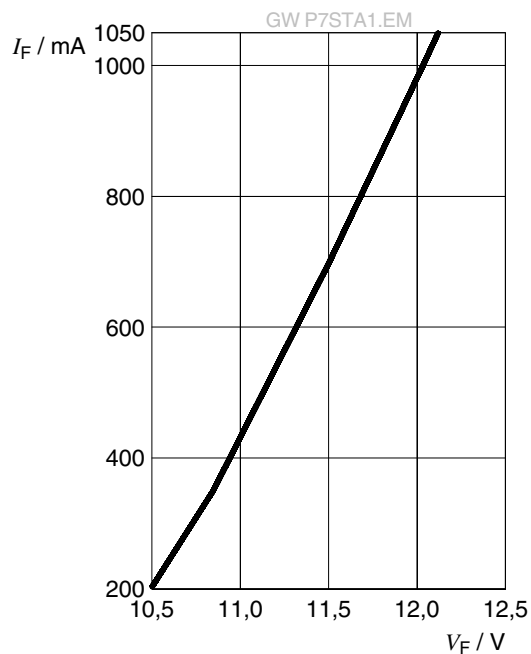**Relative Luminous Flux** <sup>6), 7)</sup>

$$\Phi_V / \Phi_V(700\text{ mA}) = f(I_F); T_J = 85^\circ\text{C}$$

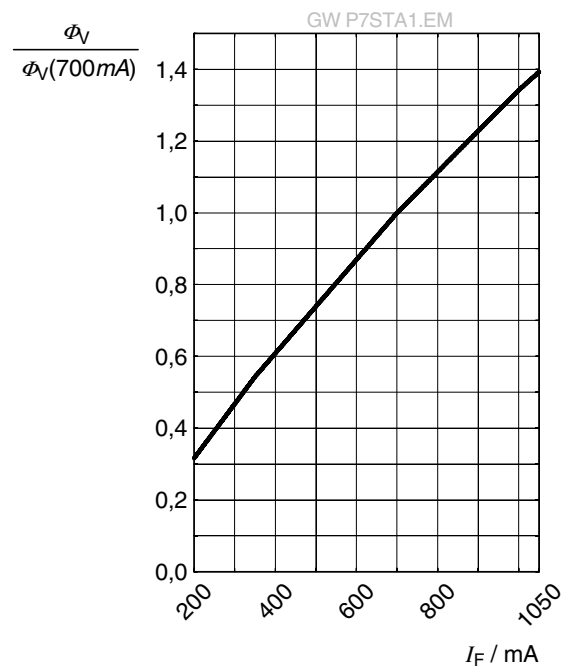
**Chromaticity Coordinate Shift** <sup>6)</sup>

$$\Delta Cx, \Delta Cy = f(I_F); T_J = 85^\circ\text{C}$$

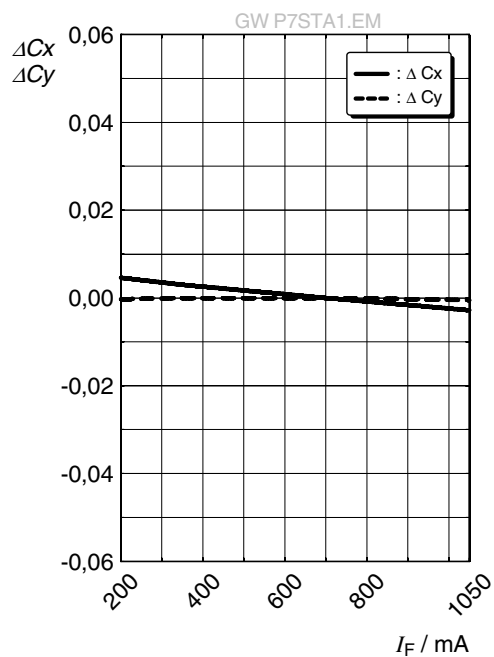


**Forward Voltage** <sup>6)</sup>


$$\Delta V_F = V_F - V_F(85^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

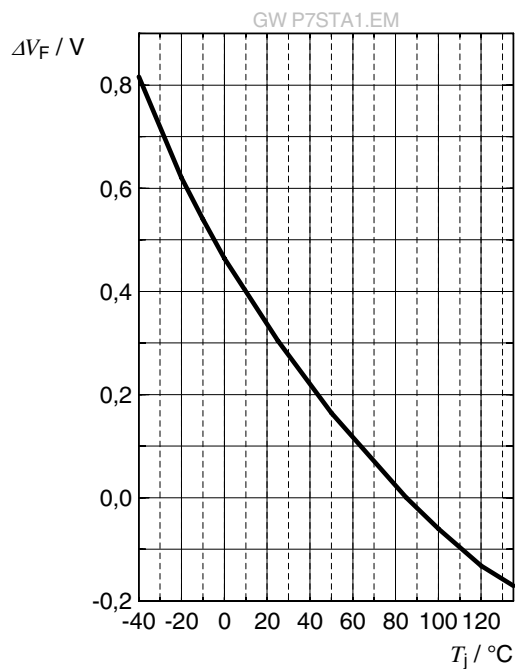**Relative Luminous Flux** <sup>6)</sup>

$$\Phi_V / \Phi_V(85^\circ\text{C}) = f(T_j); I_F = 700\text{ mA}$$

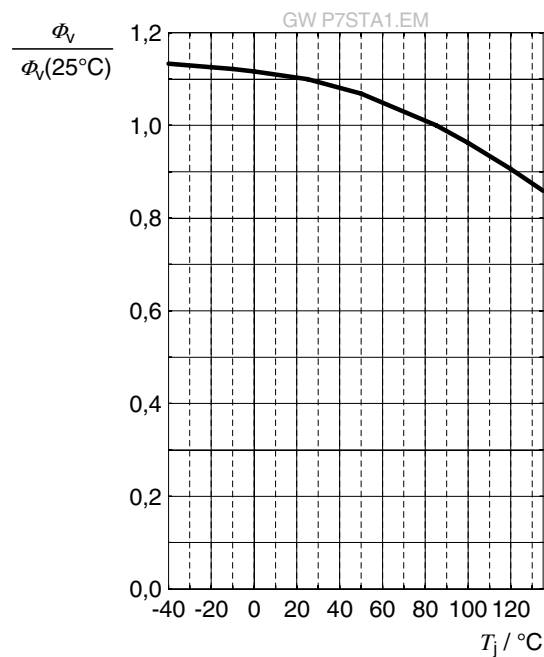
**Chromaticity Coordinate Shift** <sup>6)</sup>

$$\Delta C_x, \Delta C_y = f(T_j); I_F = 700\text{ mA}$$

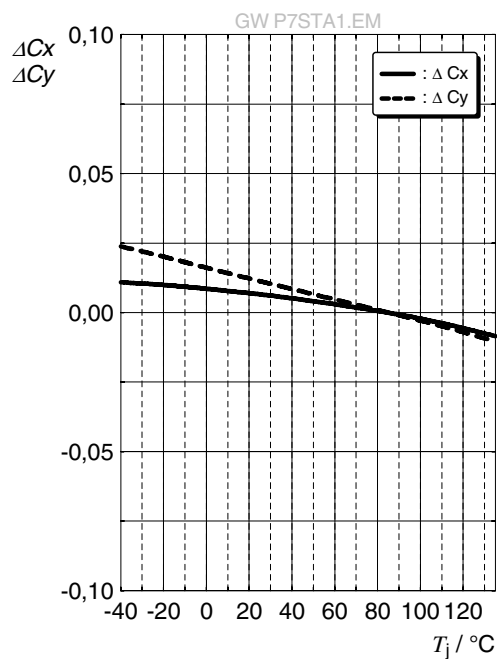


Max. Permissible Forward Current

$I_F = f(T)$

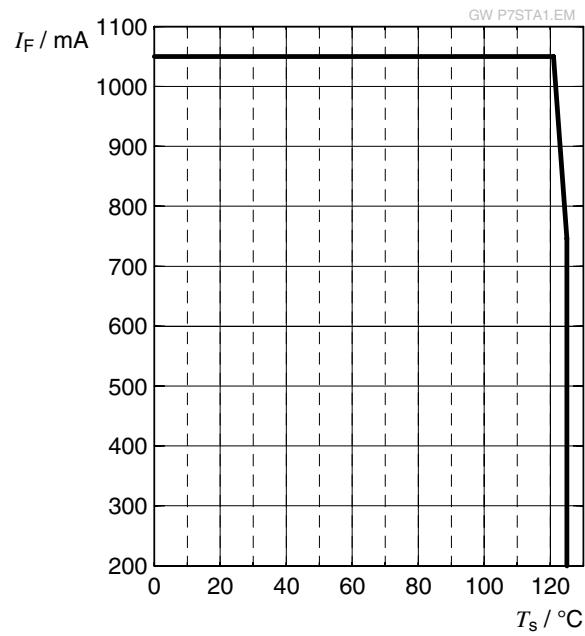

Discontinued

## Dimensional Drawing <sup>8)</sup>

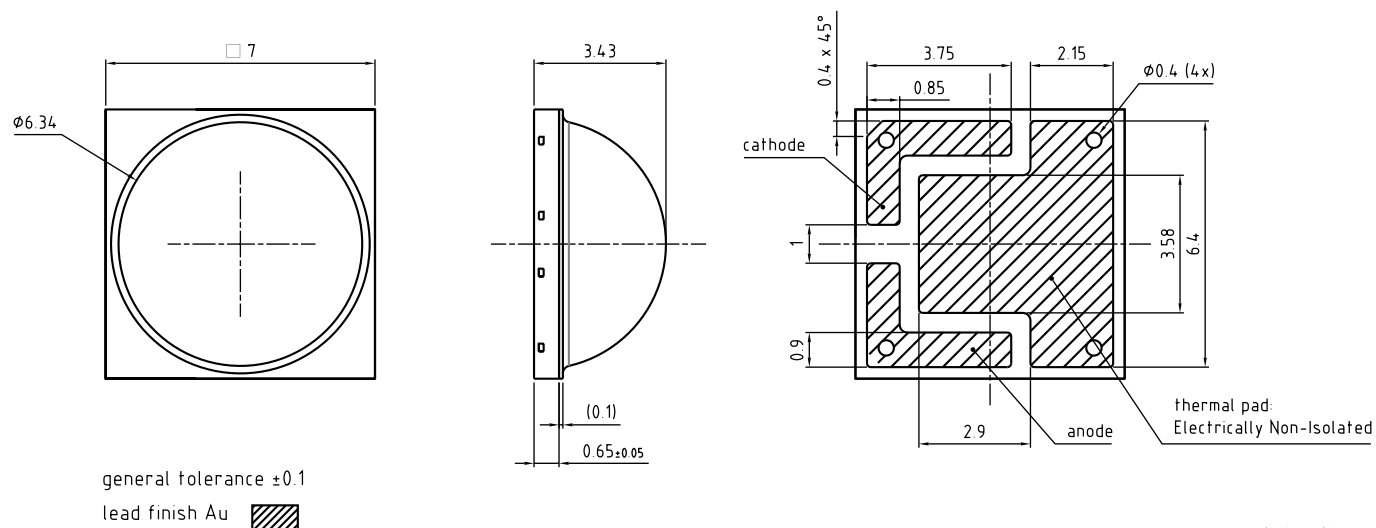


C67062-A0175-A1-05

## Further Information:

**Approximate Weight:** 184.0 mg

**ESD advice:** The device is protected by ESD device which is connected in parallel to the Chip.

Recommended Solder Pad 8)

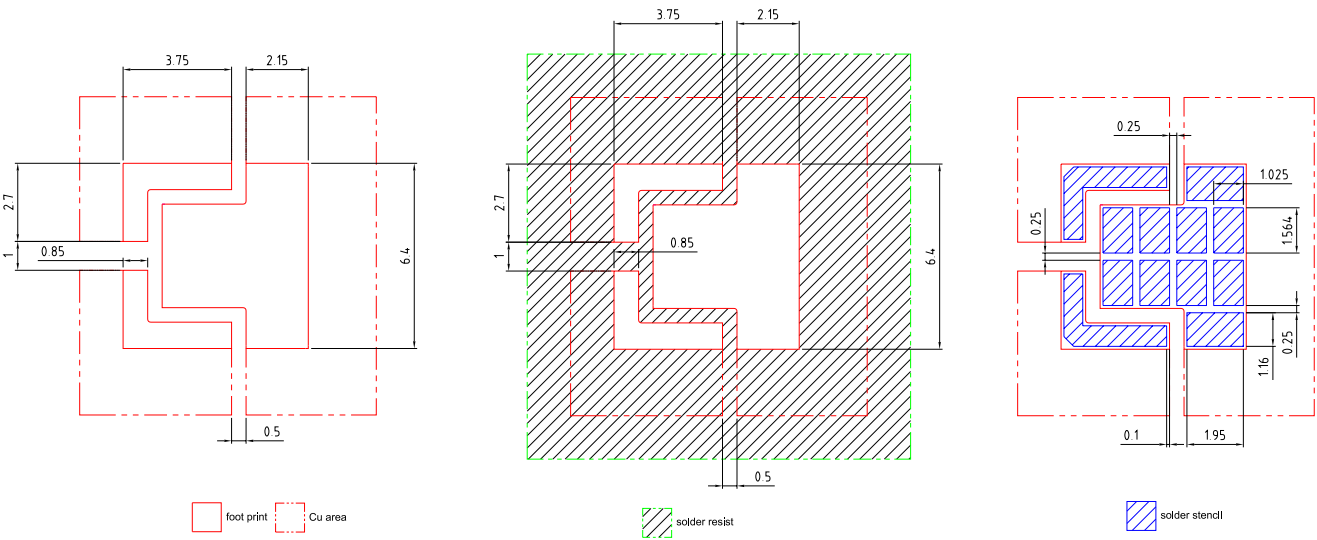


E067.0346.03-02

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for ultra sonic cleaning.

Discontinued

## Reflow Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

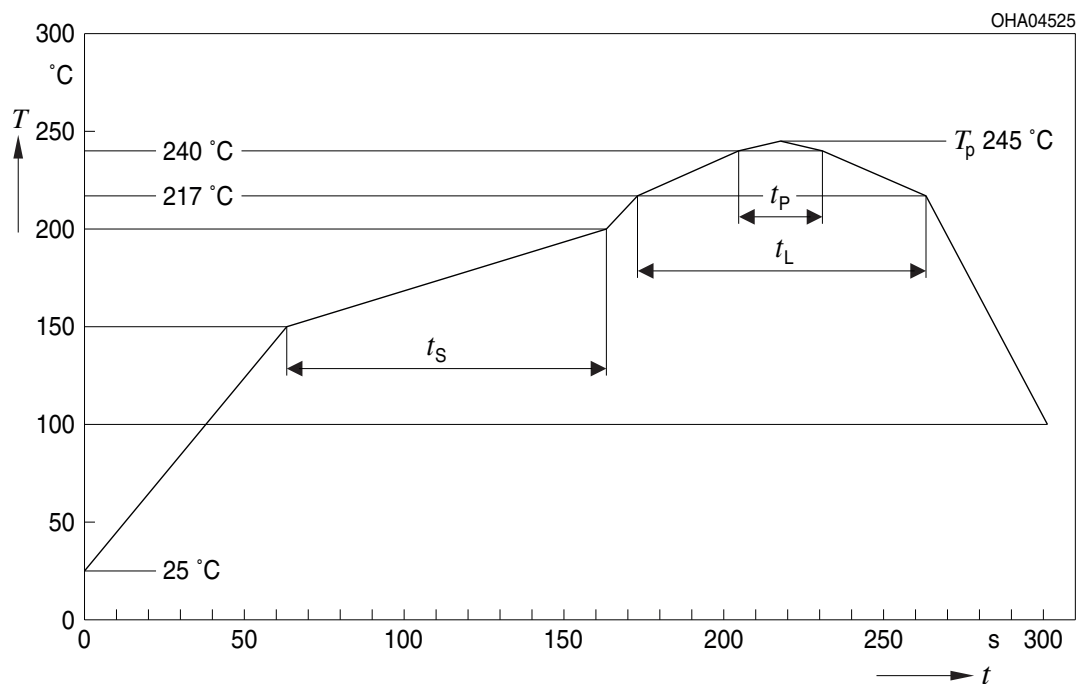


| Profile Feature                                                        | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit               |
|------------------------------------------------------------------------|--------|---------------------------|----------------|---------|--------------------|
|                                                                        |        | Minimum                   | Recommendation | Maximum |                    |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C               |        |                           | 2              | 3       | K/s                |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                                 | $t_s$  | 60                        | 100            | 120     | s                  |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$              |        |                           | 2              | 3       | K/s                |
| Liquidus temperature                                                   | $T_L$  |                           | 217            |         | $^{\circ}\text{C}$ |
| Time above liquidus temperature                                        | $t_L$  |                           | 80             | 100     | s                  |
| Peak temperature                                                       | $T_p$  |                           | 245            | 260     | $^{\circ}\text{C}$ |
| Time within 5 °C of the specified peak temperature $T_p - 5 \text{ K}$ | $t_p$  | 10                        | 20             | 30      | s                  |
| Ramp-down rate*<br>$T_p$ to 100 °C                                     |        |                           | 3              | 6       | K/s                |
| Time<br>25 °C to $T_p$                                                 |        |                           |                | 480     | s                  |

All temperatures refer to the center of the package, measured on the top of the component


\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

## Taping <sup>8)</sup>

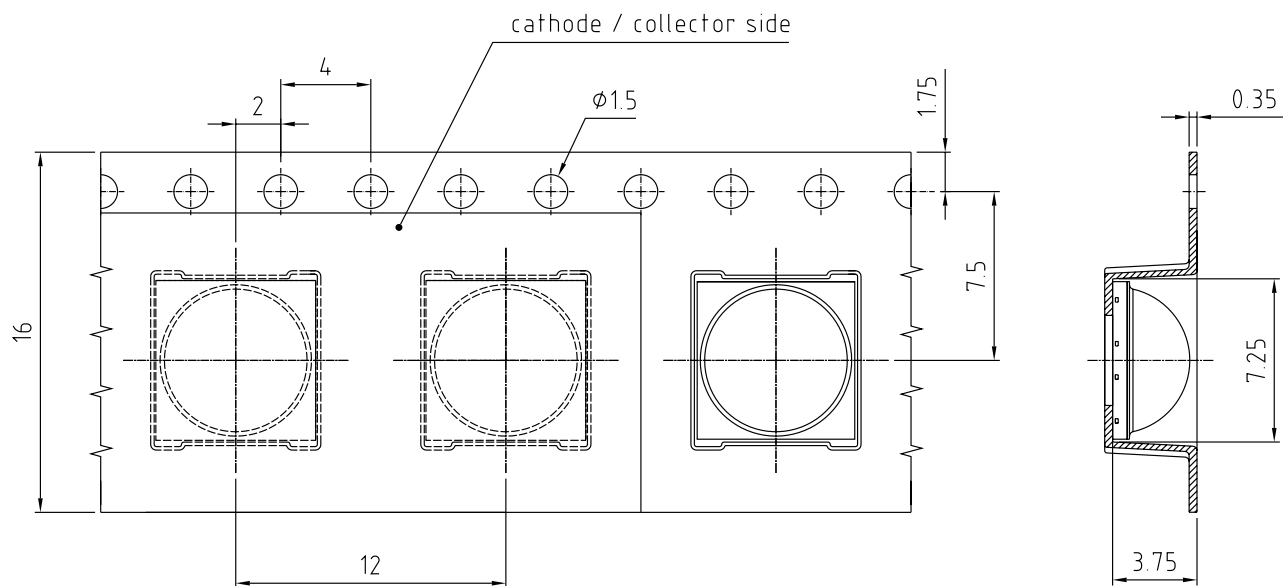

C67062-A0175-B2-05

Tape and Reel <sup>9)</sup>

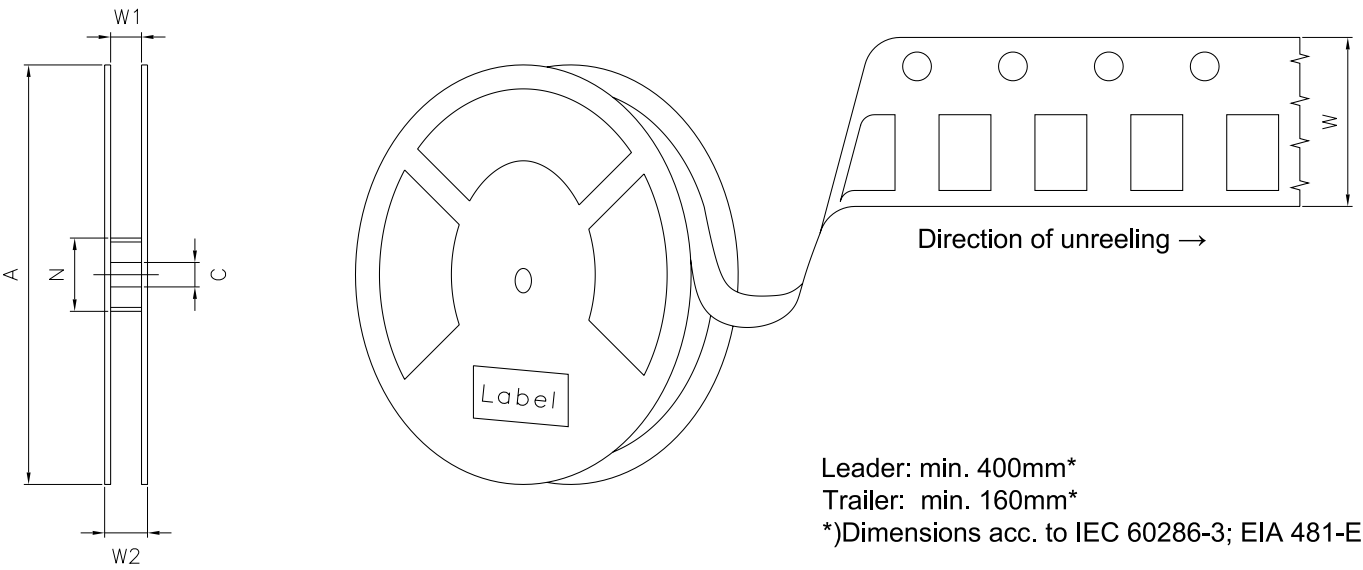

Reel Dimensions

| A      | W                   | N <sub>min</sub> | W <sub>1</sub> | W <sub>2 max</sub> | Pieces per PU |
|--------|---------------------|------------------|----------------|--------------------|---------------|
| 330 mm | 16 + 0.3 / - 0.1 mm | 60/100 mm        | 16.4 + 2 mm    | 22.4 mm            | 600           |

Discontinued

## Barcode-Product-Label (BPL)

**OSRAM Opto Semiconductors**

LX XXXX BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890


(1T) LOT NO: 1234567890 (9D) D/C: 1234

ML Temp ST  
X XXX °C X

Pack: RXX  
DEMY XXX  
X\_X123\_1234.1234 X

(X) PROD NO: 123456789 (Q) QTY: 9999 (G) GROUP: XX-XX-X-X

OHA04563

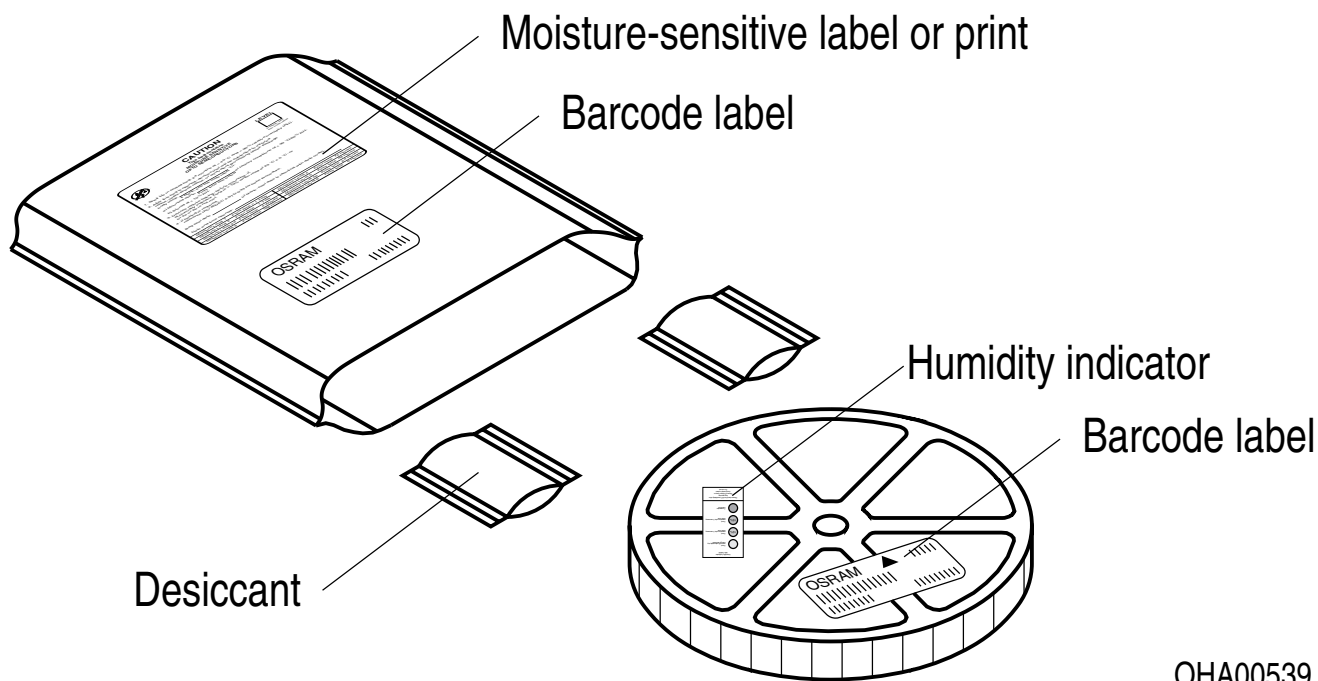Dry Packing Process and Materials <sup>8)</sup>

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

---

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class **moderate risk (exposure time 0.25 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

This device is designed for specific/recommended applications only. Please consult OSRAM Opto Semiconductors Sales Staff in advance for detailed information on other non-recommended applications (e.g. automotive).

Change management for this component is aligned with the requirements of the lighting market.

For further application related information please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### Product and functional safety devices/applications or medical devices/applications

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

OSRAM OS products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using OSRAM OS components in product safety devices/applications or medical devices/applications, buyer and/or customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and buyer and /or customer will analyze and coordinate the customer-specific request between OSRAM OS and buyer and/or customer.

---

## Glossary

- 1) **Brightness:** Brightness values are measured during a current pulse of typically 10 ms, with a tolerance of  $\pm 7\%$ .
- 2) **Reverse Operation:** Reverse Operation of 10 hours is permissible in total. Continuous reverse operation is not allowed.
- 3) **Forward Voltage:** The Forward voltage is measured during a current pulse duration of typically 1 ms with a tolerance of  $\pm 0.05V$ .
- 4) **Color reproduction index:** Color reproduction index values (CRI-RA) are measured during a current pulse of typically 10 ms and with a tolerance of  $\pm 2$ .
- 5) **Chromaticity coordinate groups:** Chromaticity coordinate groups are measured during a current pulse duration of typically 10ms with a tolerance of  $\pm 0.005$ .
- 6) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 7) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 8) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 9) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

Revision History

| Version | Date       | Change                                                           |
|---------|------------|------------------------------------------------------------------|
| 1.0     | 2018-12-07 | Initial Version                                                  |
| 1.1     | 2020-02-19 | Schematic Transportation Box<br>Dimensions of Transportation Box |
| 1.1     | 2020-03-23 | Discontinued                                                     |

Discontinued

**Published by OSRAM Opto Semiconductors GmbH**  
**Leibnizstraße 4, D-93055 Regensburg**  
**[www.osram-os.com](http://www.osram-os.com) © All Rights Reserved.**

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331