

G3VM-41BR/ER

MOS FET Relays

Higher power, 3.5-A switching with a 40-V

load voltage, DIP package.

Low 30 mΩ ON Resistance.

DIP

G3VM-41BR/ER



NEW



Note: The actual product is marked differently from the image shown here.

RoHS compliant

■ Application Examples

- Communication equipment
- Test & Measurement equipment
- Security equipment
- Factory Automation equipment
- Power circuit

■ Terminal Arrangement/Internal Connections

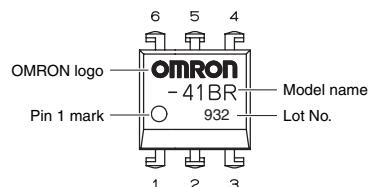

Note: The actual product is marked differently from the image shown here.

■ List of Models

| Package type | Contact form | Terminals | Load voltage (peak value)* | Model | Minimum package quantity | |
|--------------|-----------------|----------------------------|-------------------------------|----------------|--------------------------|--------------------------|
| | | | | | Number per stick | Number per tape and reel |
| DIP6 | 1a (SPST-NO) | PCB terminals | 40 V | G3VM-41BR | 50 | --- |
| | | Surface-mounting terminals | | G3VM-41ER | | |
| | | | | G3VM-41ER (TR) | --- | 1,500 |


* The AC peak and DC value are given for the load voltage.

■ Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | Rating | Unit | Measurement conditions |
|-----------------------|---|--------|-------------|--|
| Input | LED forward current | If | 30 | mA |
| | Repetitive peak LED forward current | Ifp | 1 | A 100 µs pulses, 100 pps |
| | LED forward current reduction rate | ΔIf/°C | -0.3 | mA/°C Ta ≥ 25°C |
| | LED reverse voltage | Vr | 5 | V |
| Output | Connection temperature | Tj | 125 | °C |
| | Load voltage (AC peak/DC) | Voff | 40 | V |
| | Continuous load current | Io | 3.5 | A Connection A: AC peak/DC Connection B and C: DC |
| | | | 3.5 | |
| | | | 7 | |
| | ON current reduction rate | ΔIo/°C | -35 | mA/°C Ta ≥ 25°C |
| | | | -35 | |
| | | | -70 | |
| | Pulse ON current | Iop | 10.5 | A t = 100 ms, Duty = 1/10 |
| | Connection temperature | Tj | 125 | °C |
| | Dielectric strength between I/O (See note 1.) | Vi-o | 2500 | Vrms AC for 1 min |
| Operating temperature | Operating temperature | Ta | -40 to +85 | °C With no icing or condensation |
| | Storage temperature | Tstg | -55 to +125 | °C With no icing or condensation |
| | Soldering temperature | --- | 260 | °C 10 s |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

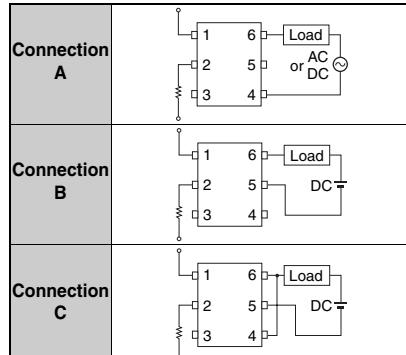

■ Electrical Characteristics (Ta = 25°C)

| Item | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions |
|-----------------|---|---------|---------|---------|------|--|
| Input | LED forward voltage | Vf | 1.18 | 1.33 | 1.48 | V If = 10 mA |
| | Reverse current | Ir | --- | --- | µA | Vr = 5 V |
| | Capacity between terminals | Ct | --- | 70 | --- | pF V = 0, f = 1 MHz |
| | Trigger LED forward current | IfT | --- | 0.5 | 3 | mA Io = 1 A |
| Output | Maximum resistance with output ON | Ron | --- | 30 | 60 | mΩ If = 5 mA, Io = 2 A, t < 1s |
| | | | --- | 15 | --- | mΩ If = 5 mA, Io = 2 A, t < 1s |
| | | | --- | 8 | --- | mΩ If = 5 mA, Io = 4 A, t < 1s |
| | Current leakage when the relay is open | Ileak | --- | --- | 1.0 | µA Voff = 40 V |
| Characteristics | Capacity between terminals | Coff | --- | 1000 | --- | pF V = 0, f = 1 MHz |
| | Capacity between I/O terminals | Ci-o | --- | 0.8 | --- | pF f = 1 MHz, Vs = 0 V |
| | Insulation resistance between I/O terminals | Ri-o | 1000 | --- | --- | MΩ Vi-o = 500 VDC, RoH ≤ 60% |
| | Turn-ON time | ton | --- | 2 | 5 | ms If = 5 mA, RL = 200 Ω, Vdd = 20 V (See note 2.) |
| | Turn-OFF time | toff | --- | 0.1 | 1 | ms |

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


| Item | Symbol | Minimum | Typical | Maximum | Unit |
|---|-----------------|---------|---------|---------|------|
| Load voltage (AC peak/DC) | V _{DD} | --- | --- | 32 | V |
| Operating LED forward current | I _F | 5 | 10 | 25 | mA |
| Continuous load current (AC peak/DC) | I _O | --- | --- | 3.5 | A |
| Operating temperature | T _a | -20 | --- | 65 | °C |

■ Engineering Data


**LED forward current vs.
Ambient temperature**

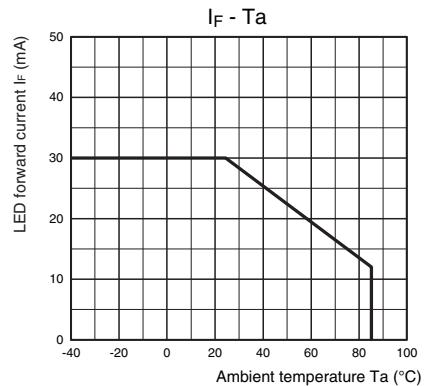


**Continuous load current vs.
Ambient temperature**

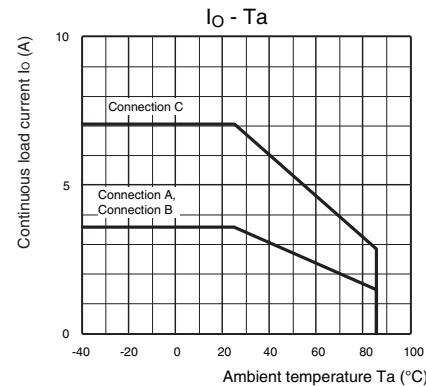


**LED forward current vs.
LED forward voltage**

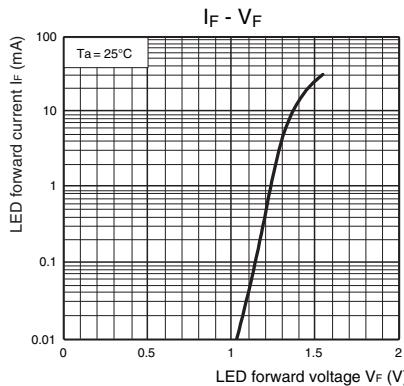


**Continuous load current vs.
On-state voltage**

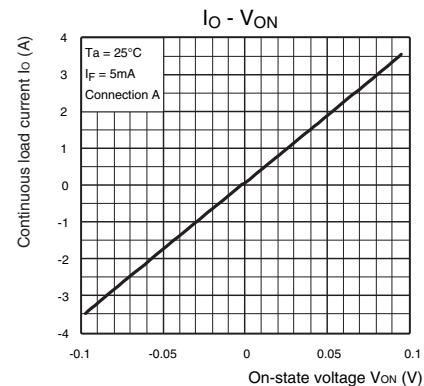


**On-state resistance vs.
Ambient temperature**

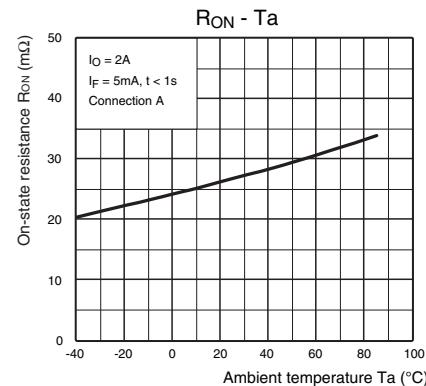


**Trigger LED forward current vs.
Ambient temperature**

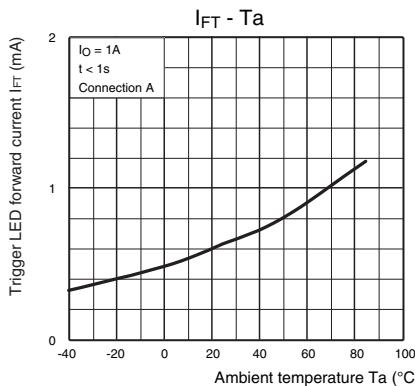


**Turn ON, Turn OFF time vs.
LED forward current**

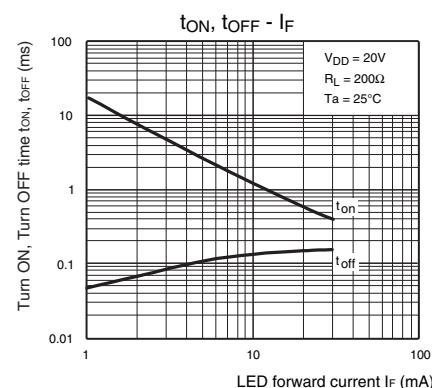

**Turn ON, Turn OFF time vs.
Ambient temperature**

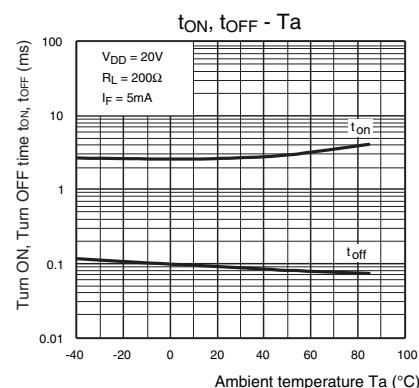

**Current leakage vs.
Ambient temperature**

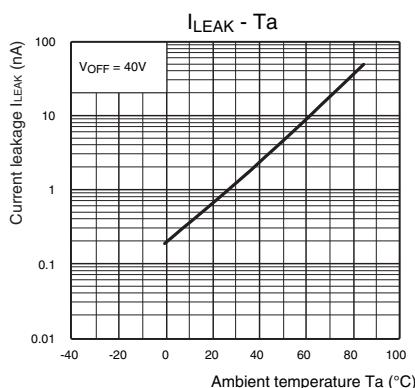

■ Safety Precautions

- Refer to "Common Precautions" for all G3VM models.


Appearance/Dimensions

DIP6

■ Appearance

DIP (Dual Inline Package)

DIP6

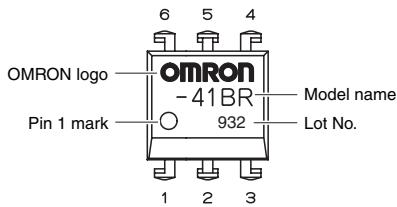

Note: The actual product is marked differently from the image shown here.


■ Dimensions

(Unit: mm)




PCB Terminals

Weight: 0.4 g

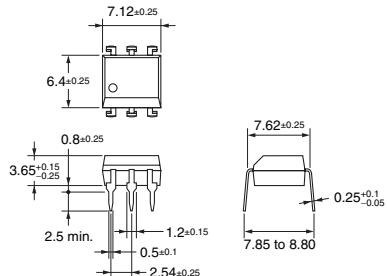


Surface-mounting Terminals

Weight: 0.4 g

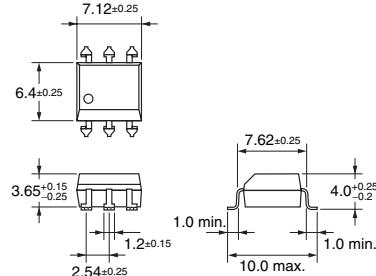


PCB Dimensions (Bottom View)



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. K138-E1-02
0412(0412)(O)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331