

## Force Guided Relay SR2M

- 2 pole relay with force guided contacts according to EN 50205
- Reinforced insulation between poles
- Version P1 for use in sockets

### Typical applications

Emergency shut-off, press control, machine control, elevator and escalator control, safety relays



F0188-D



### Approvals

VDE 116064, UL E214025, TUV 968/EZ 111, CCC 2014010305743065  
Technical data of approved types on request


### Contact Data

|                                                                                                               |                                                                                                                            |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Contact arrangement                                                                                           | 1 form A + 1 form B contacts<br>(1 NO + 1 NC) or<br>2 form C contacts (2 CO)                                               |
| According EN50205 only 1NO / 1NC (11-14 and 22-21 or 12-11 and 21-24) shall be used as force guided contacts. |                                                                                                                            |
| Rated voltage                                                                                                 | 250VAC                                                                                                                     |
| Max. switching voltage                                                                                        | 400VAC                                                                                                                     |
| Rated current                                                                                                 | 6A                                                                                                                         |
| Contact material                                                                                              | AgNi                                                                                                                       |
| Contact style                                                                                                 | single contact, force guided                                                                                               |
| 1 form A + B, 1 NO + 1 NC                                                                                     | type A according to EN 50205                                                                                               |
| 2 form C, 2CO                                                                                                 | type B according to EN 50205                                                                                               |
| Min. recommended contact load                                                                                 | 5V/10mA                                                                                                                    |
| Initial contact resistance                                                                                    | ≤100mΩ at 1A, 24VDC<br>≤20Ω at 10mA, 5VDC                                                                                  |
| Frequency of operation, with/without load                                                                     | 6/300min <sup>-1</sup>                                                                                                     |
| Contact ratings, IEC60947-5-1,<br>on 1 form A (NO) contact                                                    | AC15 - 250V/3A<br>DC13 - 24V/3A<br>on the basis of DC13 - 24V/6A<br>under conditions specified in<br>product spec. 2158001 |

### Mechanical endurance


10x10<sup>6</sup> operations

### Max. DC load breaking capacity



S0379-B

### Electrical endurance



S0433-C

### Coil Data

|                    |             |
|--------------------|-------------|
| Coil voltage range | 5 to 110VDC |
|--------------------|-------------|

### Coil Data (continued)


#### Coil versions, DC-coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% <sup>1)</sup> | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|---------------------|
| 005       | 5                 | 3.8                 | 0.5                 | 35.7                                | 700                 |
| 006       | 6                 | 4.5                 | 0.6                 | 51                                  | 706                 |
| 009       | 9                 | 6.8                 | 0.9                 | 116                                 | 698                 |
| 012       | 12                | 9                   | 1.2                 | 206                                 | 699                 |
| 015       | 15                | 11.3                | 1.5                 | 321                                 | 701                 |
| 018       | 18                | 13.5                | 1.8                 | 483                                 | 671                 |
| 021       | 21                | 16                  | 2.1                 | 630                                 | 700                 |
| 024       | 24                | 18                  | 2.4                 | 823                                 | 700                 |
| 036       | 36                | 27                  | 3.6                 | 1851                                | 700                 |
| 040       | 40                | 30                  | 4.0                 | 2286                                | 700                 |
| 048       | 48                | 36                  | 4.8                 | 3291 <sup>1)</sup>                  | 700                 |
| 060       | 60                | 45                  | 6                   | 5142 <sup>1)</sup>                  | 700                 |
| 080       | 80                | 60                  | 8                   | 9143 <sup>1)</sup>                  | 700                 |
| 110       | 110               | 83                  | 11                  | 17285 <sup>1)</sup>                 | 700                 |

<sup>1)</sup> Coil resistance ±12%.

All figures are given for coil without pre-energization, at ambient temperature +23°C.

### Coil operating range DC

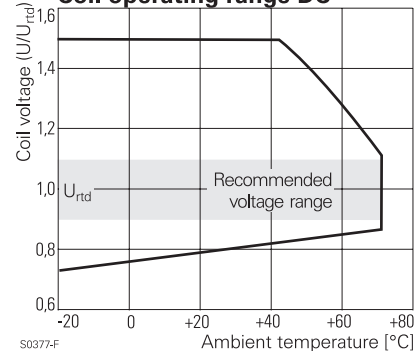

S0377-F

### Insulation

|                                            |                      |
|--------------------------------------------|----------------------|
| Initial dielectric strength                |                      |
| between open contacts                      | 1500V <sub>rms</sub> |
| between contact and coil                   | 4000V <sub>rms</sub> |
| between adjacent contacts                  | 3000V <sub>rms</sub> |
| Clearance/creepage                         |                      |
| between open contacts                      | microdisconnection   |
| between contact and coil                   | ≥8/8mm               |
| between adjacent contacts                  | ≥5.5/5.5mm           |
| Insulation to EN 50178, type of insulation |                      |
| between contact and coil                   | reinforced           |
| between adjacent contacts                  | reinforced           |

## Force Guided Relay SR2M (Continued)


| Other Data                                                                                                                                                                                                                              | SR2M                      | SR2M Plug-in |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------|
| Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customer-support/rohssupportcenter">www.te.com/customer-support/rohssupportcenter</a> |                           |              |
| Ambient temperature                                                                                                                                                                                                                     | -40 to 70°C               |              |
| Category of environmental Protection                                                                                                                                                                                                    | IEC 61 810 RTIII          | RTII         |
| Weight                                                                                                                                                                                                                                  | 20g                       |              |
| Resistance to soldering heat THT                                                                                                                                                                                                        | IEC 60068-2-20 260°C/5s - |              |
| Packaging/unit                                                                                                                                                                                                                          | tube/20 pcs.              |              |

For more detailed information see product specification 2158001


### Accessories

For details see datasheet Accessories Force Guided Relay SR2M plugin  
NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

### Dimensions

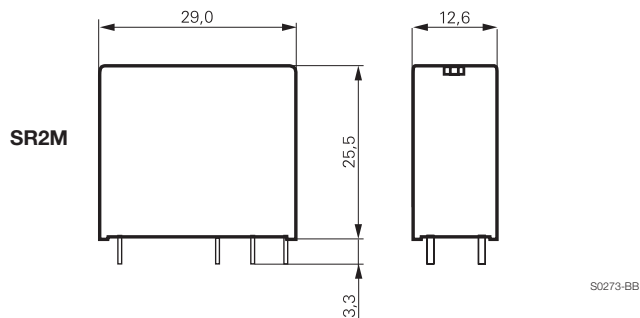


### SR2M Plug-In

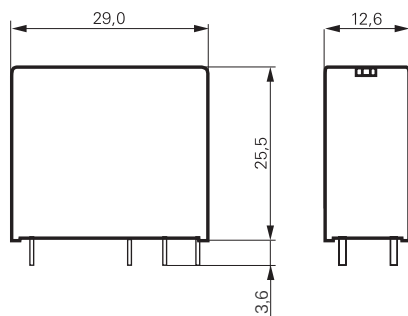


### PCB layout / terminal assignment

Bottom view on solder pins

2 form C, 2 CO contacts

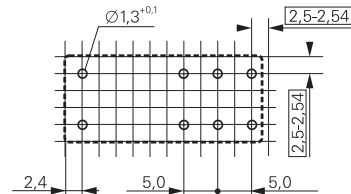


S0163-CO




S0163-BJ

1 form A + 1 form B contacts, 1 NO + 1 NC

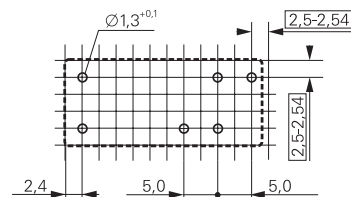

S0163-CU



S0163-CV

**Force Guided Relay SR2M** (Continued)

**Product code structure**

Typical product code **V23047 -A1 012 -A 5 11**

**Type**

**V23047** Relay with force guided contacts SR2M

**Version**

**A1** standard **P1** Plug-In

**Coil**

Coil code: please refer to coil versions table (e.g. 024=24VDC)

**Contact set**

**A** single contact

**Contact material**

**5** AgNi

**Contact configuration**

**01** 2 form C contacts (2 CO)

**11** 1 form A + 1 form B contacts ( 1 NO + 1 NC)

Other types on request

| Product code      | Version        | Cont. material | Contact arrangement      | Coil   | Part number |
|-------------------|----------------|----------------|--------------------------|--------|-------------|
| V23047-A1005-A501 | Standard       | AgNi           | 2 form C (CO)            | 5VDC   | 1393258-2   |
| V23047-A1005-A511 | wash tight     |                | 1 A + 1 B, (1 NO + 1 NC) |        | 7-1415006-1 |
| V23047-A1006-A501 |                |                | 2 form C (CO)            | 6VDC   | 3-1415011-1 |
| V23047-A1006-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 6-1415011-1 |
| V23047-A1009-A501 |                |                | 2 form C (CO)            | 9VDC   | 1393258-3   |
| V23047-A1009-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 7-1415011-1 |
| V23047-A1012-A501 |                |                | 2 form C (CO)            | 12VDC  | 1393258-4   |
| V23047-A1012-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 1393258-5   |
| V23047-A1018-A501 |                |                | 2 form C (CO)            | 18VDC  | 1393258-8   |
| V23047-A1018-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 1393258-9   |
| V23047-A1021-A501 |                |                | 2 form C (CO)            | 21VDC  | 1-1393258-1 |
| V23047-A1021-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 1-1393258-2 |
| V23047-A1024-A501 |                |                | 2 form C (CO)            | 24VDC  | 1-1393258-5 |
| V23047-A1024-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 1-1393258-7 |
| V23047-A1036-A501 |                |                | 2 form C (CO)            | 36VDC  | 2-1393258-0 |
| V23047-A1036-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 8-1415011-1 |
| V23047-A1040-A501 |                |                | 2 form C (CO)            | 40VDC  | 2-1393258-1 |
| V23047-A1040-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 2-1393258-2 |
| V23047-A1048-A501 |                |                | 2 form C (CO)            | 48VDC  | 3-1415006-1 |
| V23047-A1048-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 9-1415011-1 |
| V23047-A1060-A511 |                |                |                          | 60VDC  | 2-1393258-3 |
| V23047-A1110-A501 |                |                | 2 form C (CO)            | 110VDC | 1-1415012-1 |
| V23047-A1110-A511 |                |                | 1 A + 1 B, (1 NO + 1 NC) |        | 2-1415012-1 |
| V23047-P1005-A501 | Plug-in        |                | 2 form C (CO)            | 5VDC   | 7-1415543-4 |
| V23047-P1009-A501 | for socket use |                |                          | 9VDC   | 7-1415543-5 |
| V23047-P1012-A501 |                |                |                          | 12VDC  | 7-1415543-6 |
| V23047-P1021-A501 |                |                |                          | 21VDC  | 7-1415543-7 |
| V23047-P1024-A501 |                |                |                          | 24VDC  | 7-1415543-8 |
| V23047-P1036-A501 |                |                |                          | 36VDC  | 7-1415543-9 |
| V23047-P1110-A501 |                |                |                          | 110VDC | 8-1415543-0 |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331