# HF RoHS Fixed Voltage Series - DO-214

## Agency Approvals

| Agency | Agency File Number |
|---|---|
| UL | E133083 |

## Pinout Designation




## Schematic Symbol




## Description

Fixed Voltage Series DO-214 are uni-directional SIDACtor® devices designed to protect SLICs (Subscriber Line Interface Circuit) from damaging overvoltage transients.

The series provides single line protection using a fixed voltage switching device for negative surges. All positive surges are routed through an internal diode to a ground reference.

## Features and Benefits

- Low voltage overshoot
- Low on-state voltage
- Does not degrade with use
- Fails short circuit when surged in excess of ratings
- Integrated diode for positive voltage surges

## Applicable Global Standards

- TIA-968-A
- TIA-968-B
- ITU K.20/21 Enhanced Level
- ITU K.20/21 Basic Level
- GR 1089 Inter-building*
- GR 1089 Intra-building*
- IEC 61000-4-5
- YD/T 1082
- YD/T 993
- YD/T 950

*A-rated parts require series resistance

## Electrical Characteristics

| Part Number | Marking | $V_{DRM}$ @$I_{DRM}$=5µA | $V_S$ @100V/µs | $I_H$ | $I_S$ | $I_T$ | $V_T$ @$I_T$=2.2 Amps | $V_F$ | Capacitance @1MHz, -2V bias | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | V min | V max | mA min | mA max | A max | V max | V max | pF | |
| | | | | | | | | | pF min | pF max |
| P0641SALRP | P61A | 58 | 77 | 120 | 800 | 2.2 | 4 | 5 | 50 | 90 |
| P0721SALRP | P71A | 65 | 88 | 120 | 800 | 2.2 | 4 | 5 | 45 | 85 |
| P0901SALRP | P91A | 75 | 98 | 120 | 800 | 2.2 | 4 | 5 | 45 | 80 |
| P1101SALRP | P01A | 95 | 130 | 120 | 800 | 2.2 | 4 | 5 | 40 | 70 |
| P1301SALRP | P131A | 120 | 160 | 120 | 800 | 2.2 | 4 | 5 | 40 | 70 |
| P1701SALRP | P17A | 160 | 200 | 120 | 800 | 2.2 | 4 | 5 | 30 | 55 |
| P0641SCLRP | P61C | 58 | 77 | 120 | 800 | 2.2 | 4 | 5 | 65 | 200 |
| P0721SCLRP | P71C | 65 | 88 | 120 | 800 | 2.2 | 4 | 5 | 60 | 190 |
| P0901SCLRP | P91C | 75 | 98 | 120 | 800 | 2.2 | 4 | 5 | 60 | 180 |
| P1101SCLRP | P01C | 95 | 130 | 120 | 800 | 2.2 | 4 | 5 | 50 | 160 |
| P1301SCLRP | P131C | 120 | 160 | 120 | 800 | 2.2 | 4 | 5 | 50 | 160 |
| P1701SCLRP | P17C | 160 | 200 | 120 | 800 | 2.2 | 4 | 5 | 40 | 130 |

Notes:
- Absolute maximum ratings measured at $T_A$= 25°C (unless otherwise noted).
- Devices are uni-directional

© 2011 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to www.littelfuse.com for current information.

## Surge Ratings

| Series | $I_{PP}$ | | | | | | | | | $I_{TSM}$ 50/60 Hz | di/dt |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | 0.2x310 [1] 0.5x700 [2] | 2x10 [1] 2x10 [2] | 8x20 [1] 1.2x50 [2] | 10x160 [1] 10x160 [2] | 10x560 [1] 10x560 [2] | 5x320 [1] 9x720 [2] | 10x360 [1] 10x360 [2] | 10x1000 [1] 10x1000 [2] | 5x310 [1] 10x700 [2] | | |
| | A min | A min | A min | A min | A min | A min | A min | A min | A min | A min | A/µs max |
| A | 20 | 150 | 150 | 90 | 50 | 75 | 75 | 45 | 75 | 20 | 500 |
| C | 50 | 500 | 400 | 200 | 150 | 200 | 175 | 100 | 200 | 30 | 500 |

Notes:

1 Current waveform in µs
2 Voltage waveform in µs

- Peak pulse current rating ($I_{PP}$) is repetitive and guaranteed for the life of the product.
- $I_{PP}$ ratings applicable over temperature range of -40°C to +85°C
- The device must initially be in thermal equilibrium with -40°C ≤ $T_J$ ≤ +150°C

## Thermal Considerations

| Package | Symbol | Parameter | Value | Unit |
|---|---|---|---|---|
| DO-214AA  | $T_J$ | Operating Junction Temperature Range | -40 to +150 | °C |
| | $T_S$ | Storage Temperature Range | -65 to +150 | °C |
| | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 90 | °C/W |

## V-I Characteristics

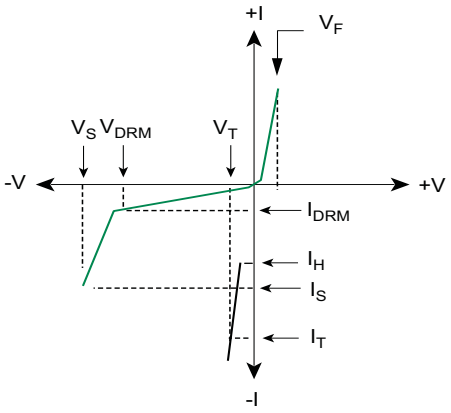


## $t_r$ x $t_d$ Pulse Waveform

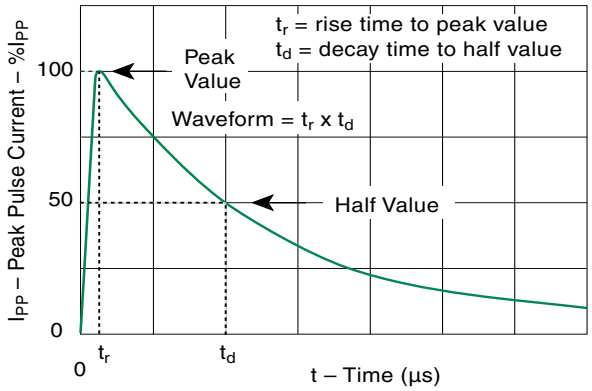


## Normalized $V_S$ Change vs. Junction Temperature

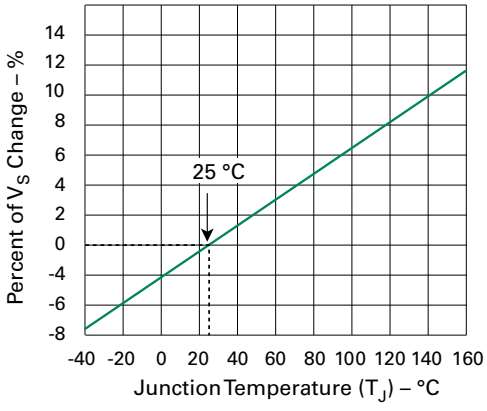


## Normalized DC Holding Current vs. Case Temperature

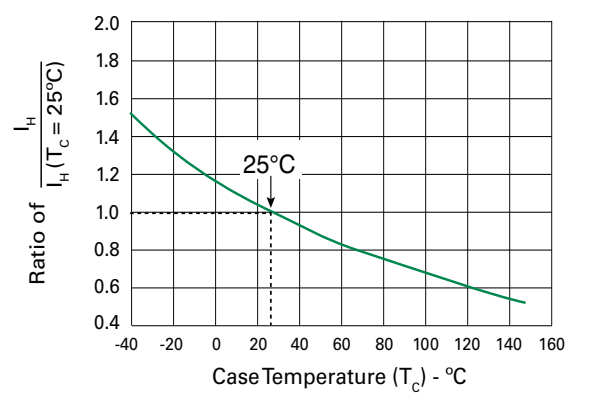


© 2011 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to www.littelfuse.com for current information.

## Soldering Parameters

| Reflow Condition | | Pb-Free assembly (see Fig. 1) |
|---|---|---|
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max ($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) ($t_s$) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp ($T_L$) to peak) | | 3°C/sec. Max. |
| $T_{S(max)}$ to $T_L$ - Ramp-up Rate | | 3°C/sec. Max. |
| Reflow | -Temperature ($T_L$) (Liquidus) | +217°C |
| | -Temperature ($t_L$) | 60-150 secs. |
| Peak Temp ($T_P$) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp ($t_p$) | | 30 secs. Max. |
| Ramp-down Rate | | 6°C/sec. Max. |
| Time 25°C to Peak Temp ($T_P$) | | 8 min. Max. |
| Do not exceed | | +260°C |

Figure 1

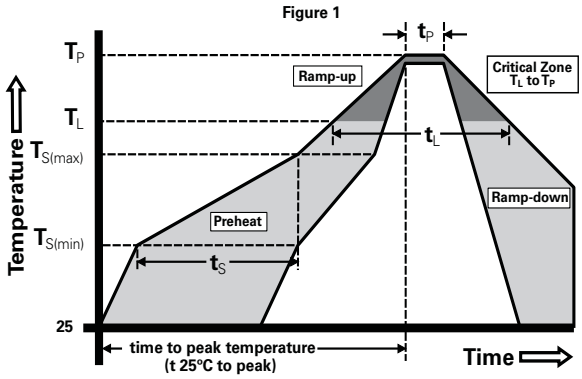


## Physical Specifications

| | |
|---|---|
| **Lead Material** | Copper Alloy |
| **Terminal Finish** | 100% Matte-Tin Plated |
| **Body Material** | UL recognized epoxy meeting flammability classification 94V-0 |

## Environmental Specifications

| | |
|---|---|
| **High Temp Voltage Blocking** | 80% Rated $V_{DRM}$ ($V_{AC}$ Peak) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| **Temp Cycling** | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104 |
| **Biased Temp & Humidity** | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101 |
| **High Temp Storage** | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101 |
| **Low Temp Storage** | -65°C, 1008 hrs. |
| **Thermal Shock** | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106 |
| **Autoclave (Pressure Cooker Test)** | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102 |
| **Resistance to Solder Heat** | +260°C, 30 secs. MIL-STD-750 (Method 2031) |
| **Moisture Sensitivity Level** | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1 |

## Part Numbering

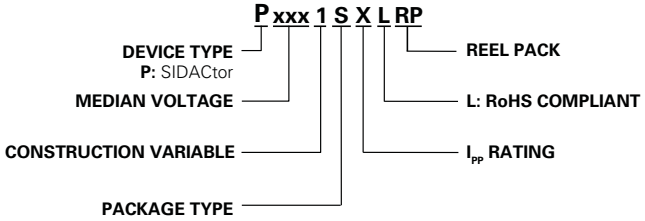


## Part Marking

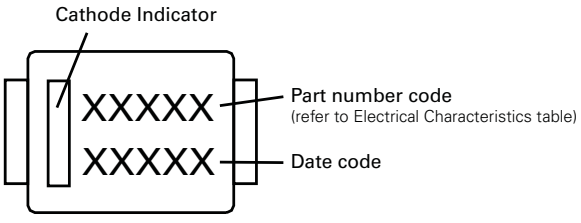


© 2011 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to www.littelfuse.com for current information.

## Dimensions — DO-214AA

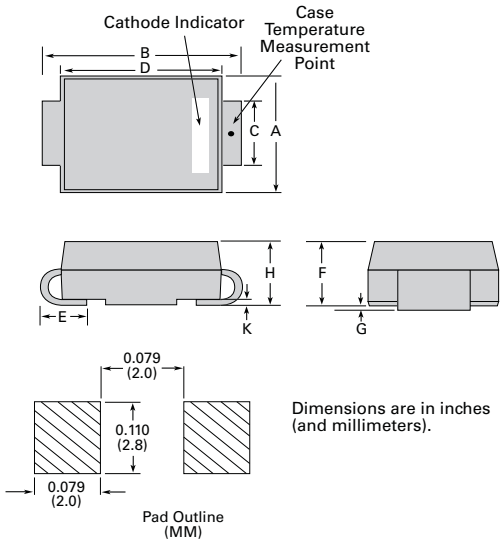


| Dimensions | Inches | | Millimeters | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 0.130 | 0.156 | 3.30 | 3.95 |
| B | 0.201 | 0.220 | 5.10 | 5.60 |
| C | 0.077 | 0.087 | 1.95 | 2.20 |
| D | 0.159 | 0.181 | 4.05 | 4.60 |
| E | 0.030 | 0.063 | 0.75 | 1.60 |
| F | 0.075 | 0.096 | 1.90 | 2.45 |
| G | 0.002 | 0.008 | 0.05 | 0.20 |
| H | 0.077 | 0.104 | 1.95 | 2.65 |
| K | 0.006 | 0.016 | 0.15 | 0.41 |

## Packing Options

| Package Type | Description | Quantity | Added Suffix | Industry Standard |
|---|---|---|---|---|
| S | DO-214AA Tape & Reel Pack | 2500 | RP | EIA-481-D |

## Tape and Reel Specification — DO-214AA

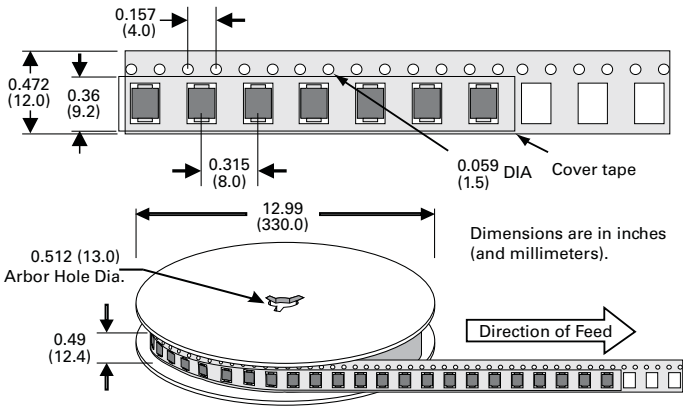


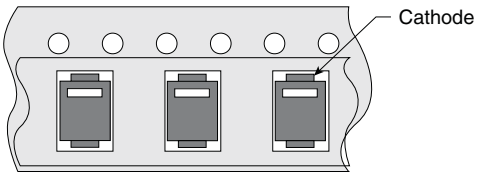


© 2011 Littelfuse, Inc.
Specifications are subject to change without notice.
Please refer to www.littelfuse.com for current information.

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** sales@st-electron.ru

**Адрес:** 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331