
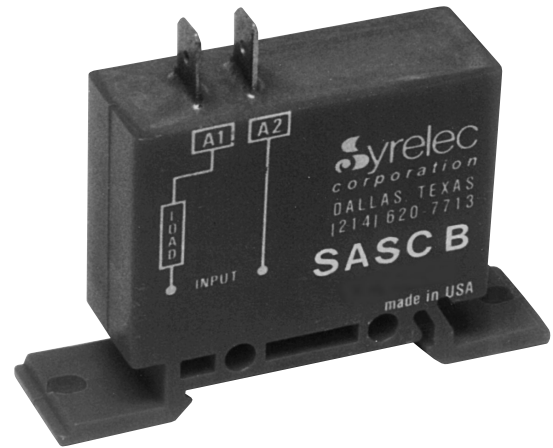


## GENERAL DETAILS OF TYPE S TIMERS

S series are compact, low cost, precision devices designed to the most demanding specifications. The small size, epoxy filled case is highly resistant against dust, vibrations, shock or humidity. Creep and strike distance according to VDE 0110 Group C 250V. Case protection IP66. Case material - Polymid.

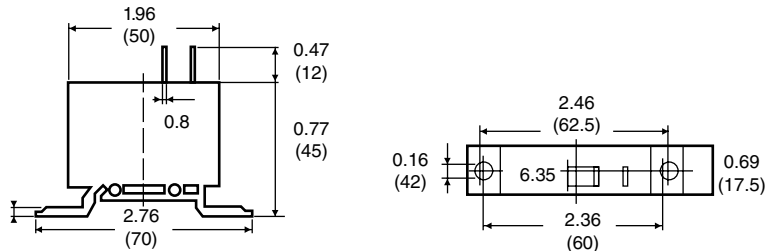


## SAS SERIES DELAY ON MAKE TIMER WITH SOLID STATE OUTPUT

UL listed CSA recognized

### SPECIFICATIONS:

|                                      |                                                            |
|--------------------------------------|------------------------------------------------------------|
| <b>Input Power</b>                   | 24 VAC/DC, 110 VAC/DC<br>220 VAC/DC, $\pm 15\%$ , 50/60 Hz |
| <b>Output Rating</b>                 | max.: 1.0 A at 20°C<br>min.: 10 mA                         |
| <b>Repetition accuracy</b>           | $\pm 0.5\%$ at a constant ambient                          |
| <b>Temp rise derating</b>            | 5 mA / °C                                                  |
| <b>Reset time SAS-L &amp; SAS-DL</b> | 25 ms after timing<br>100 ms during timing                 |
| <b>SAS-PL</b>                        | 100 ms during timing                                       |
| <b>Leakage current during timing</b> | 5 mA max                                                   |
| <b>Peak surge current</b>            | 20 A < 10 ms                                               |
| <b>Peak surge voltage</b>            | 1400 V, 10 $\mu$ s                                         |
| <b>Terminals</b>                     | 1/4" (6.35mm) quick connect                                |
| <b>Operating temperature</b>         | -22°F to +140°F (-30°C to +60°C)                           |
| <b>Weight</b>                        | 1.9 oz. (55g)                                              |

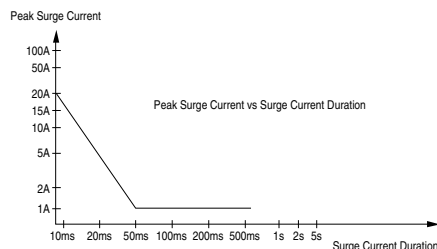

### ORDERING INFORMATION: (100 pcs. minimum order)

**S**  
MOUNTING

**S**=Encapsulated requiring  
DIN-Rail, Panel Adapter  
or use Base Mounting  
Holes

**AS-D**  
SERIES

**AS** = standard relay  
**AS-D** = remote potentiometer  
**AS-P** = internal potentiometer

**100S**  
TIME RANGE


**AS** = Fixed .1 sec - 1 min  
**AS-D** = .1 sec - 60 min  
**Ex** = 10-100 sec maintain 10:1 ratio  
**AS-P** = .1 sec - 10 sec  
1-100 sec maintain 100:1 ratio

**220 AD**  
INPUT POWER

**24AD** = 24 VAC/DC  
**110AD** = 110 VAC/DC  
**220AD** = 220 VAC/DC


**L**  
UL

**1 AMP**

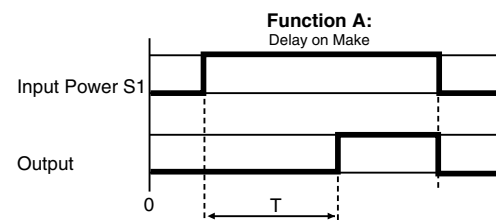

Function A: When input power is applied, timing (t) begins. At the end of the preselected time, the solid state SCR output turns on. The output turns off when the input power is removed, resetting the timer for the next cycle.

### WIRING DIAGRAM:


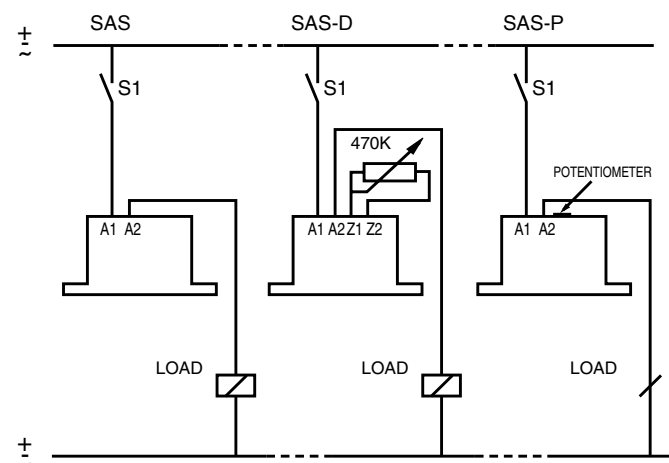


# SDS SERIES

## REPEAT CYCLE TIMER

UL listed CSA recognized

- Shock Resistant
- SCR Solid State Output
- Optional Remote Potentiometer
- DIN-Rail or Base Mounting

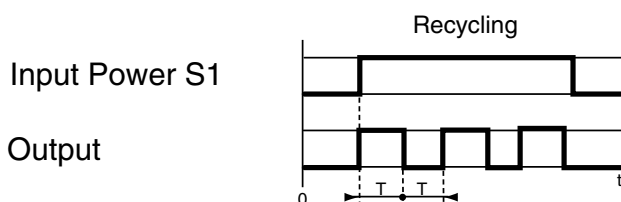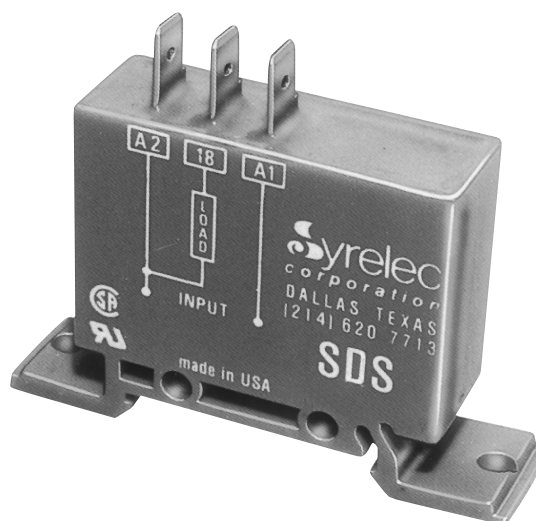


When input power S1 is applied, the solid state output turns on immediately for the timer period specified. It then turns OFF for that same time period and repeats continuously while power is applied.

### SPECIFICATIONS:

|                               |                                                                        |
|-------------------------------|------------------------------------------------------------------------|
| Input                         | 24 VAC, 48 VAC, 110 VAC<br>220 VAC, $\pm 15\%$ , 50/60 Hz              |
| Maximum power consumption     | 24 VAC: 0.2 VA<br>48 VAC: 0.3 VA<br>110 VAC: 0.6 VA<br>220 VAC: 1.2 VA |
| Output                        | SCR                                                                    |
| Output Rating                 | max.: 1.0 A at 20°C<br>min.: 10 mA                                     |
| Repetition accuracy           | $\pm 0.5\%$ at a constant ambient                                      |
| Temp. rise derating           | 5 mA / °C                                                              |
| Reset time                    | 100 ms after timing<br>150 ms during timing                            |
| Leakage current during timing | 2 mA max.                                                              |
| Peak surge current            | 20 A < 10ms                                                            |
| Peak surge voltage            | 1400 V, 100 $\mu$ s                                                    |
| Terminals                     | Faston 1/4" (6.35mm)                                                   |
| Operating temperature         | -22°F to +140°F -30°C to +60°C                                         |
| Weight                        | 1.9 oz. (55g)                                                          |

### WIRING DIAGRAM:

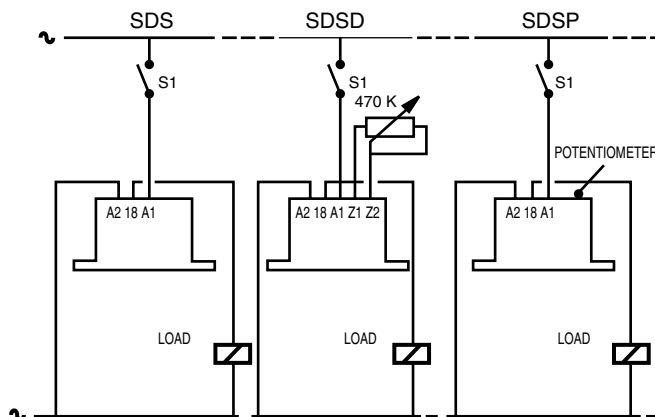

DIMENSIONS See page 3-34

### ORDERING INFORMATION: (100 pcs. minimum order)

P.S.: Specify maximum time for "D" and "P" versions.

**S**  
MOUNTING

**DS**  
SERIES

**10 min**  
TIME RANGE

**24**  
INPUT POWER

**L**  
UL

S = Encapsulated, requiring  
DIN-Rail, Panel Adapter or  
use Base Mounting Holes

DS = Fixed time  
DS-D = remote potentiometer  
DS-P = internal potentiometer

DS = Fixed .1s. - 120 min  
DS-D = .1 sec. - 120 min.  
Maintain 10:1 ratio  
DS-P = 1 -10 sec. or min., 10 - 100 sec. or min.  
Maintain 100:1 ratio

24A = 24 VAC  
48A = 48 VAC  
110A = 110 VAC  
220A = 220 VAC

1 AMP


Products and specifications subject to change without notice.

# SHS SERIES


## INTERVAL TIMER WITH SOLID STATE OUTPUT

UL listed CSA recognized

- Epoxy Encapsulated
- DIN-Rail or Base Mounting
- Internal or External Time Set
- Fixed Time

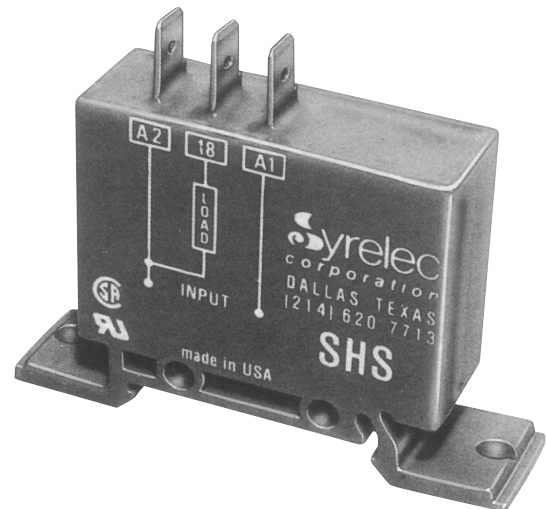

2

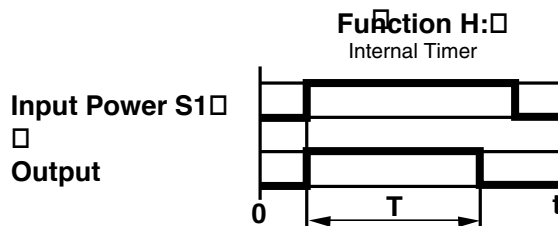


The solid state output turns on when the input power (S1) is applied. The output turns off at the end of time (T). The timer is reset when the input power is removed.

### SPECIFICATIONS:

|                               |                                                                        |
|-------------------------------|------------------------------------------------------------------------|
| Input                         | 24 VAC, 48 VAC, 110 VAC<br>220 VAC, $\pm 15\%$ , 50/60 Hz              |
| Maximum power consumption     | 24 VAC: 0.2 VA<br>48 VAC: 0.3 VA<br>110 VAC: 0.6 VA<br>220 VAC: 1.2 VA |
| Output                        | SCR                                                                    |
| Output Rating                 | max.: 1.0 A at 20°C<br>min.: 10 mA                                     |
| Repetition accuracy           | $\pm 0.5\%$ at a constant ambient                                      |
| Temp. rise derating           | 5 mA / °C                                                              |
| Reset time                    | 100 ms after timing<br>150 ms during timing                            |
| Leakage current during timing | 2 mA max.                                                              |
| Peak surge current            | 20 A < 10 ms                                                           |
| Peak surge voltage            | 1400 V, 100 $\mu$ s                                                    |
| Terminals                     | Faston 1/4" (6.35mm)                                                   |
| Operating temperature         | -22°F to +140°F    -30°C to +60°C                                      |
| Weight                        | 1.9 oz. (55g)                                                          |

### WIRING DIAGRAM:

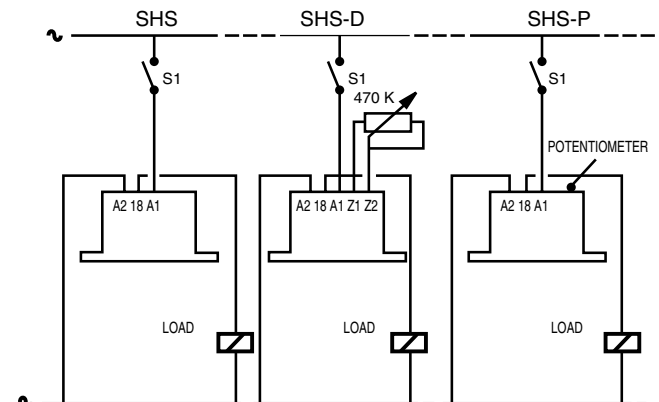

Note: Available with internal potentiometer in HS-P Series.

### ORDERING INFORMATION: (100 pcs. minimum order)

P.S.: Specify maximum time for "D" and "P" versions.

DIMENSIONS See page 3-34

| S<br>MOUNTING                                                                       | HS-D<br>SERIES                                                                  | 300S<br>TIME RANGE                                                                                                                                    | 220A<br>INPUT POWER                                              | L<br>UL |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|---------|
| S = Encapsulated, requiring<br>DIN-Rail, Panel<br>Adapter or Base Mounting<br>Holes | HS = Fixed time<br>HS-D = remote potentiometer<br>HS-P = internal potentiometer | HS = Fixed .1s. - 120 min<br>HS-D = .1 sec. - 120 min. Maintain 10:1 ratio<br>HS-P = 1-10 sec. or min., 10 - 100 sec. or min.<br>Maintain 100:1 ratio | 24A = 24 VAC<br>48A = 48 VAC<br>110A = 110 VAC<br>220A = 220 VAC | 1 AMP   |

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331