

# MURS230T3G, NRVUS230T3G, MURS240T3G, NRVUS240T3G

## Surface Mount Ultrafast Power Rectifiers

Ideally suited for high voltage, high frequency rectification, or as free wheeling and protection diodes in surface mount applications where compact size and weight are critical to the system.

### Features

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- High Temperature Glass Passivated Junction
- Low Forward Voltage Drop (0.95 Volts Max @ 2.0 A,  $T_J = 150^\circ\text{C}$ )
- NRVUS and SURS8 Prefixes for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

### Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 95 mg (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes:  $260^\circ\text{C}$  Max. for 10 Seconds
- Polarity: Polarity Band Indicates Cathode Lead
- ESD Rating:
  - ♦ Human Body Model = 3A (> 4 kV)
  - ♦ Machine Model = C (> 400 V)



ON Semiconductor®


[www.onsemi.com](http://www.onsemi.com)

## ULTRAFAST RECTIFIERS 2 AMPERES, 300–400 VOLTS



SMB  
CASE 403A

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
U2x = Device Code  
x = F for MURS230T3  
= G for MURS240T3  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device                        | Package          | Shipping <sup>†</sup>  |
|-------------------------------|------------------|------------------------|
| MURS230T3G                    | SMB<br>(Pb-Free) | 2,500 /<br>Tape & Reel |
| NRVUS230T3G,-<br>NRVUS230VT3G | SMB<br>(Pb-Free) | 2,500 /<br>Tape & Reel |
| MURS240T3G                    | SMB<br>(Pb-Free) | 2,500 /<br>Tape & Reel |
| NRVUS240T3G,<br>NRVUS240VT3G  | SMB<br>(Pb-Free) | 2,500 /<br>Tape & Reel |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MURS230T3G, NRVUS230T3G, MURS240T3G, NRVUS240T3G

## MAXIMUM RATINGS

| Rating                                                                                                                                     | Symbol                          | Value       | Unit             |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|-------------|------------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage<br>MURS230T3G/NRVUS230T3G<br>MURS240T3G/NRVUS240T3G | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 300<br>400  | V                |
| Average Rectified Forward Current<br>@ $T_L = 150^\circ\text{C}$<br>@ $T_L = 125^\circ\text{C}$                                            | $I_{F(AV)}$                     | 1.0<br>2.0  | A                |
| Non-Repetitive Peak Surge Current<br>(Surge applied at rated load conditions halfwave, single phase, 60 Hz)                                | $I_{FSM}$                       | 35          | A                |
| Operating Junction Temperature Range                                                                                                       | $T_J$                           | -65 to +175 | $^\circ\text{C}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

## THERMAL CHARACTERISTICS

| Rating                                                            | Symbol          | Max | Unit               |
|-------------------------------------------------------------------|-----------------|-----|--------------------|
| Thermal Resistance, Junction-to-Lead ( $T_L = 25^\circ\text{C}$ ) | $R_{\theta JL}$ | 13  | $^\circ\text{C/W}$ |


## ELECTRICAL CHARACTERISTICS

| Characteristic                                                                                                                                                              | Symbol   | Value        | Unit          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|
| Maximum Instantaneous Forward Voltage (Note 1)<br>( $I_F = 2.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )<br>( $I_F = 2.0\text{ A}$ , $T_J = 150^\circ\text{C}$ )               | $V_F$    | 1.30<br>1.05 | V             |
| Maximum Instantaneous Reverse Current (Note 1)<br>(Rated DC Voltage, $T_J = 25^\circ\text{C}$ )<br>(Rated DC Voltage, $T_J = 150^\circ\text{C}$ )                           | $i_R$    | 5.0<br>150   | $\mu\text{A}$ |
| Maximum Reverse Recovery Time<br>( $I_F = 1.0\text{ A}$ , $di/dt = 50\text{ A}/\mu\text{s}$ )<br>( $I_F = 0.5\text{ A}$ , $i_R = 1.0\text{ A}$ , $I_R$ to $0.25\text{ A}$ ) | $t_{rr}$ | 65<br>50     | ns            |
| Maximum Forward Recovery Time<br>( $I_F = 1.0\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ , Rec. to $1.0\text{ V}$ )                                                     | $t_{fr}$ | 50           | ns            |


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse Test: Pulse Width =  $300\text{ }\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .


# MURS230T3G, NRVUS230T3G, MURS240T3G, NRVUS240T3G

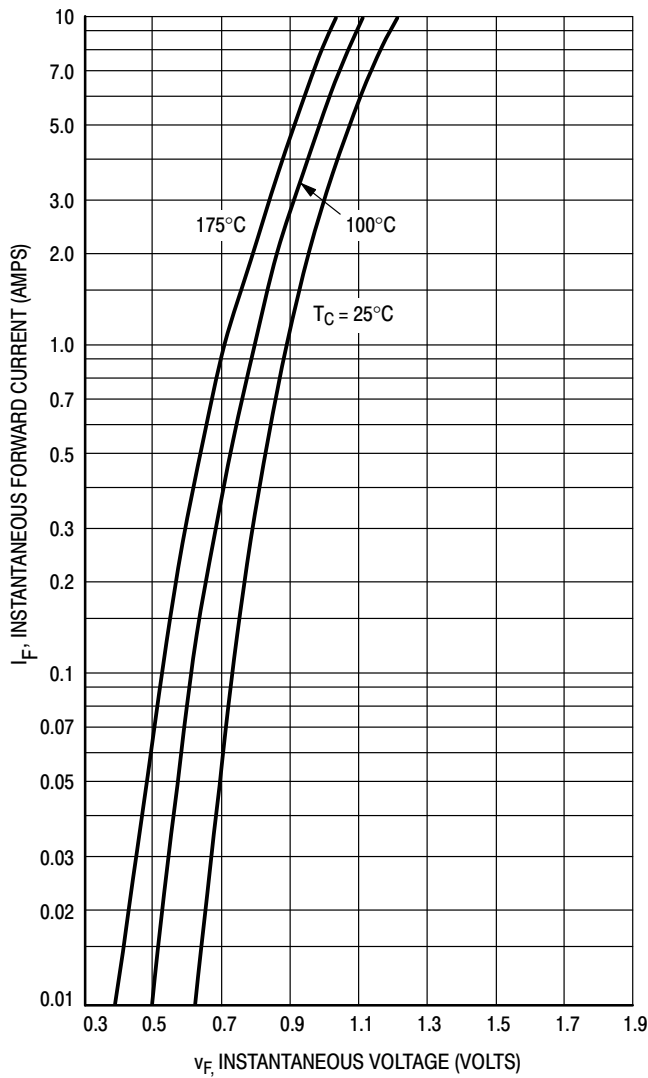

**Figure 1. Typical Forward Voltage**

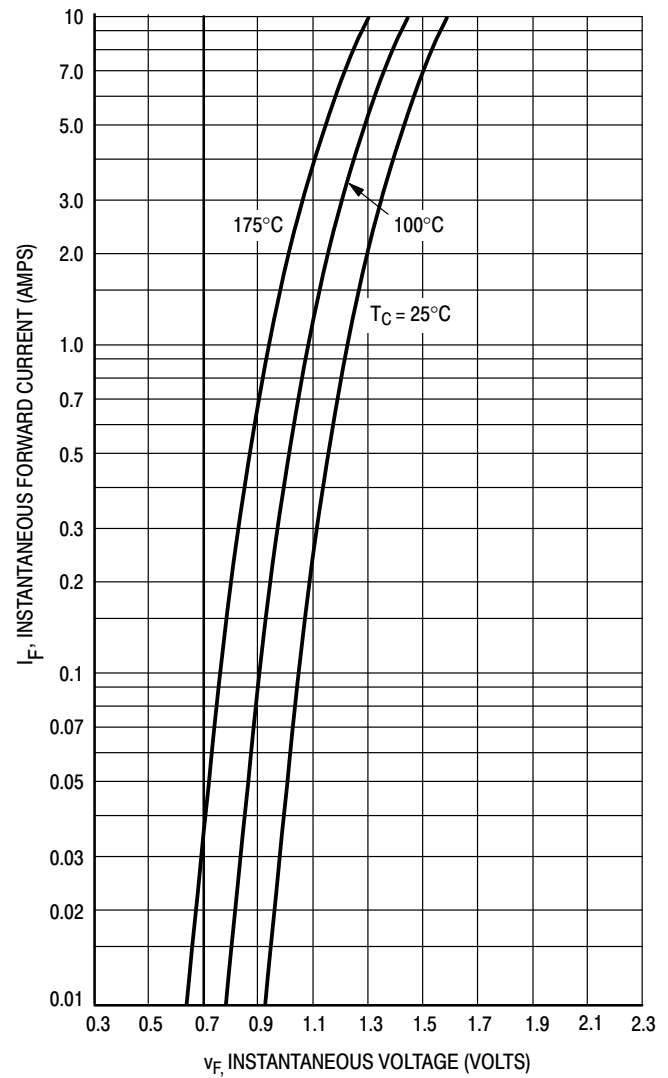


**Figure 2. Maximum Forward Voltage**

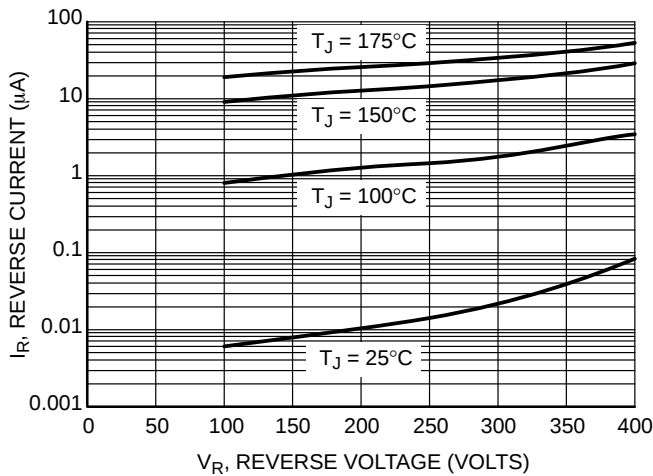


**Figure 3. Typical Reverse Current\***

\* The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these same curves if applied  $V_R$  is sufficiently below rated  $V_R$ .

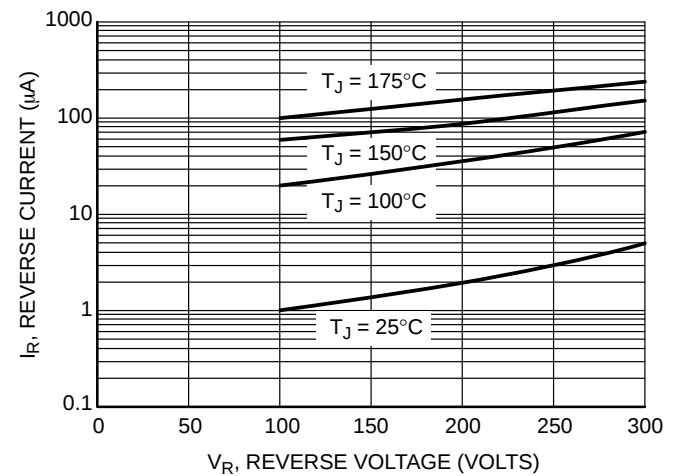


**Figure 4. Maximum Reverse Current for  
MURS230T3G, NRVUS230T3G**


# MURS230T3G, NRVUS230T3G, MURS240T3G, NRVUS240T3G

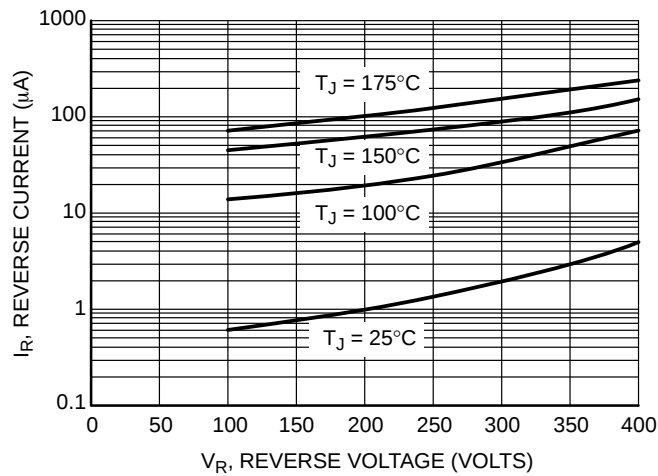


**Figure 5. Maximum Reverse Current for MURS240T3G, NRVUS240T3G**

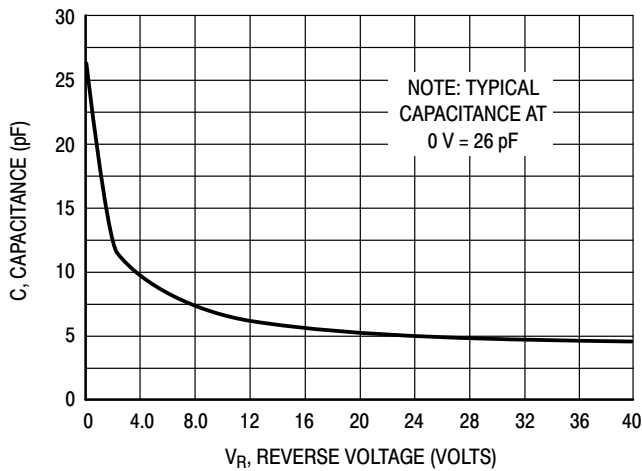


**Figure 6. Typical Capacitance**

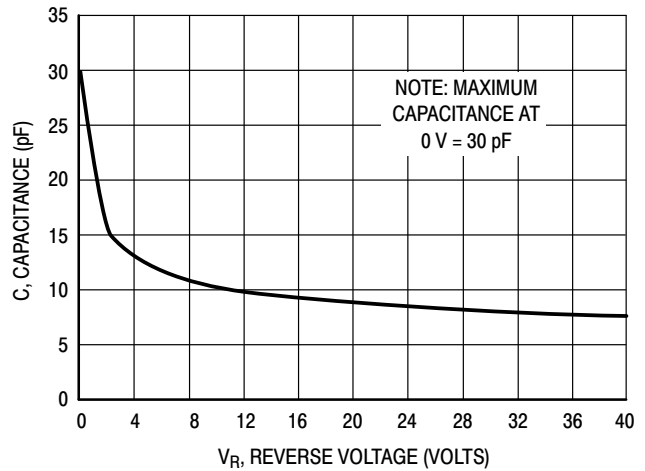

**Figure 7. Maximum Capacitance**

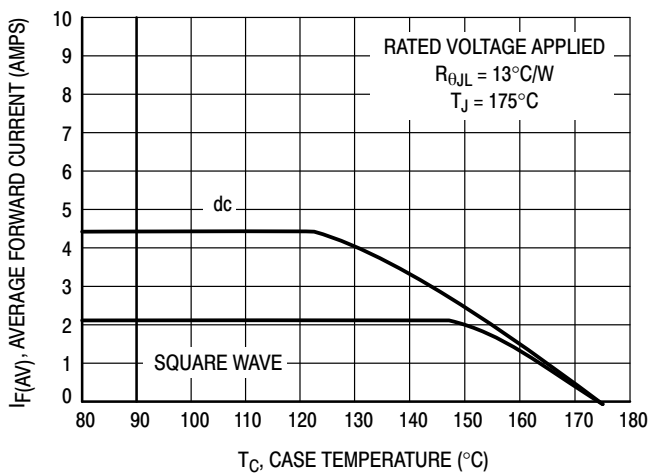

**Figure 8. Current Derating, Case**

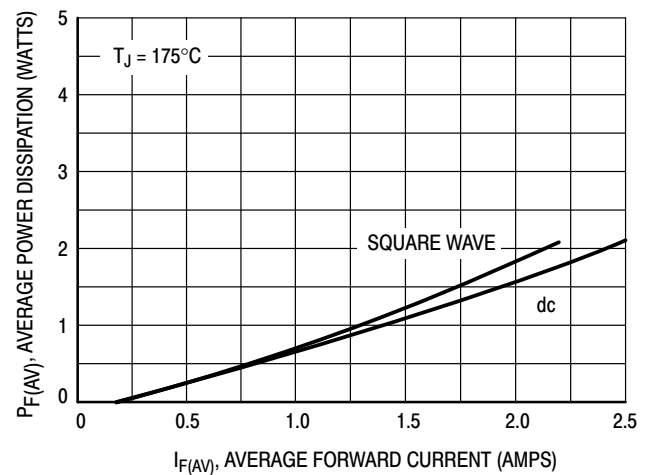


**Figure 9. Power Dissipation**

# MURS230T3G, NRVUS230T3G, MURS240T3G, NRVUS240T3G

## PACKAGE DIMENSIONS

SMB  
CASE 403A-03  
ISSUE J

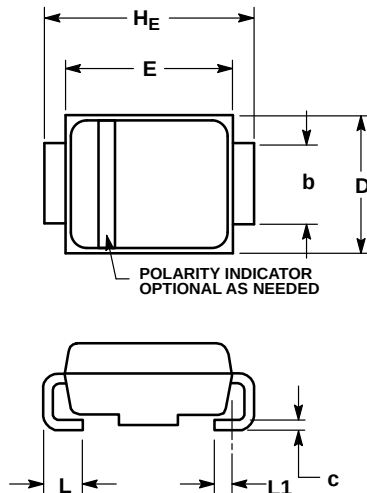


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L1.

| DIM | MILLIMETERS |      |      | INCHES    |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | 1.95        | 2.30 | 2.47 | 0.077     | 0.091 | 0.097 |
| A1  | 0.05        | 0.10 | 0.20 | 0.002     | 0.004 | 0.008 |
| b   | 1.96        | 2.03 | 2.20 | 0.077     | 0.080 | 0.087 |
| c   | 0.15        | 0.23 | 0.31 | 0.006     | 0.009 | 0.012 |
| D   | 3.30        | 3.56 | 3.95 | 0.130     | 0.140 | 0.156 |
| E   | 4.06        | 4.32 | 4.60 | 0.160     | 0.170 | 0.181 |
| HE  | 5.21        | 5.44 | 5.60 | 0.205     | 0.214 | 0.220 |
| L   | 0.76        | 1.02 | 1.60 | 0.030     | 0.040 | 0.063 |
| L1  | 0.51 REF    |      |      | 0.020 REF |       |       |

### SOLDERING FOOTPRINT\*

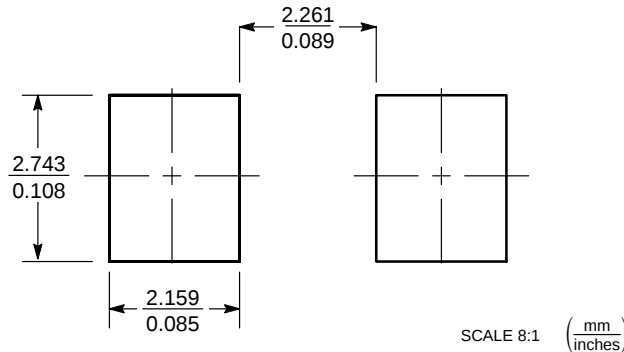

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331