


D-SUB HIGH DENSITY

Solder pin – Straight – Precision machined contacts

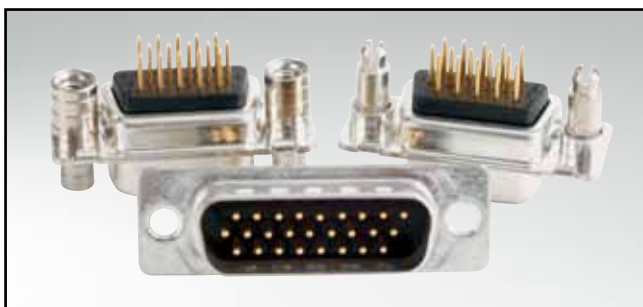


RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784

DESCRIPTION

- Mounting styles:
 - with through-hole, Ø .118" / 3 mm
 - with 4-40 UNC or M3 threaded insert
 - with 4-40 UNC front / M3 threaded rear spacer
 - with M3 front / 4-40 UNC or M3 threaded rear spacer with PCB clip
 - with 4-40 UNC or M3 front and threaded rear spacer with PCB clip
- Quality class 3 (also available in quality class 1)
- Shell: Steel tin plated (brass tin plated or stainless steel available on request)


SOCKET CONNECTOR



| No. of pos. | A -0.76 | B -0.25 | C |
|-------------|---------|---------|---|
| 15 | 31.19 | 16.46 | 25.00 ^{+0.12} |
| 26 | 39.52 | 24.79 | 33.30 ^{+0.15} _{-0.10} |
| 44 | 53.42 | 38.50 | 47.04 ^{+0.13} |
| 62 | 69.70 | 54.96 | 63.50 ^{+0.13} |
| 78 | 67.31 | 52.55 | 61.10 ^{+0.14} _{-0.11} |



PCB layout: Kat1iT9A

PLUG CONNECTOR





| No. of pos. | A -0.76 | B +0.25 | C | D -0.3 |
|-------------|---------|---------|---|--------|
| 15 | 31.19 | 16.79 | 25.00 ^{+0.12} | 6.12 |
| 26 | 39.52 | 25.12 | 33.30 ^{+0.15} _{-0.10} | 6.12 |
| 44 | 53.42 | 38.84 | 47.04 ^{+0.13} | 5.99 |
| 62 | 69.70 | 55.30 | 63.50 ^{+0.13} | 5.99 |
| 78 | 67.31 | 52.68 | 61.10 ^{+0.14} _{-0.11} | 5.99 |

PCB layout: Kat1iU0A




78 pos. = Dim. in (_)




78 pos. = Dim. in (_)

ORDER DATA



| SOCKET CONNECTOR | | |
|------------------|----------------|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | Through-hole | 164 A 17159 X |
| 26 | Through-hole | 164 A 17169 X |
| 44 | Through-hole | 164 A 17179 X |
| 62 | Through-hole | 164 A 17189 X |
| 78 | Through-hole | 164 A 17199 X |

| PLUG CONNECTOR | | |
|----------------|----------------|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | Through-hole | 163 A 16749 X |
| 26 | Through-hole | 163 A 16759 X |
| 44 | Through-hole | 163 A 16769 X |
| 62 | Through-hole | 163 A 16779 X |
| 78 | Through-hole | 163 A 16789 X |




| SOCKET CONNECTOR | | |
|------------------|--------------------------|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Threaded insert | 164 A 17209 X |
| 26 | 4-40 UNC Threaded insert | 164 A 17219 X |
| 44 | 4-40 UNC Threaded insert | 164 A 17229 X |
| 62 | 4-40 UNC Threaded insert | 164 A 17239 X |
| 78 | 4-40 UNC Threaded insert | 164 A 17249 X |
| 15 | M3 Threaded insert | 164 A 17259 X |
| 26 | M3 Threaded insert | 164 A 17269 X |
| 44 | M3 Threaded insert | 164 A 17279 X |
| 62 | M3 Threaded insert | 164 A 17289 X |
| 78 | M3 Threaded insert | 164 A 17299 X |

| PLUG CONNECTOR | | |
|----------------|--------------------------|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Threaded insert | 163 A 16799 X |
| 26 | 4-40 UNC Threaded insert | 163 A 16809 X |
| 44 | 4-40 UNC Threaded insert | 163 A 16819 X |
| 62 | 4-40 UNC Threaded insert | 163 A 16829 X |
| 78 | 4-40 UNC Threaded insert | 163 A 16839 X |
| 15 | M3 Threaded insert | 163 A 16849 X |
| 26 | M3 Threaded insert | 163 A 16859 X |
| 44 | M3 Threaded insert | 163 A 16869 X |
| 62 | M3 Threaded insert | 163 A 16879 X |
| 78 | M3 Threaded insert | 163 A 16889 X |

D-SUB HIGH DENSITY – MOUNTING STYLES


Solder pin – Straight – Precision machined contacts

ORDER DATA



| SOCKET CONNECTOR | | |
|------------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Front/M3 Threaded rear spacer | 164 A 17309 X |
| 26 | 4-40 UNC Front/M3 Threaded rear spacer | 164 A 17319 X |
| 44 | 4-40 UNC Front/M3 Threaded rear spacer | 164 A 17329 X |
| 62 | 4-40 UNC Front/M3 Threaded rear spacer | 164 A 17339 X |
| 78 | 4-40 UNC Front/M3 Threaded rear spacer | 164 A 17349 X |


| PLUG CONNECTOR | | |
|----------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Front/M3 Threaded rear spacer | 163 A 16899 X |
| 26 | 4-40 UNC Front/M3 Threaded rear spacer | 163 A 16909 X |
| 44 | 4-40 UNC Front/M3 Threaded rear spacer | 163 A 16919 X |
| 62 | 4-40 UNC Front/M3 Threaded rear spacer | 163 A 16929 X |
| 78 | 4-40 UNC Front/M3 Threaded rear spacer | 163 A 16939 X |

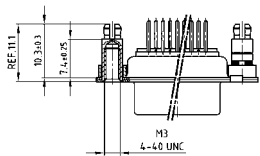

| SOCKET CONNECTOR | | |
|------------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Threaded rear spacer PCB clip | 164 A 17359 X |
| 26 | 4-40 UNC Threaded rear spacer PCB clip | 164 A 17369 X |
| 44 | 4-40 UNC Threaded rear spacer PCB clip | 164 A 17379 X |
| 62 | 4-40 UNC Threaded rear spacer PCB clip | 164 A 17389 X |
| 78 | 4-40 UNC Threaded rear spacer PCB clip | 164 A 17399 X |
| 15 | M3 Threaded rear spacer PCB clip | 164 A 17409 X |
| 26 | M3 Threaded rear spacer PCB clip | 164 A 17419 X |
| 44 | M3 Threaded rear spacer PCB clip | 164 A 17429 X |
| 62 | M3 Threaded rear spacer PCB clip | 164 A 17439 X |
| 78 | M3 Threaded rear spacer PCB clip | 164 A 17449 X |

| PLUG CONNECTOR | | |
|----------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Threaded rear spacer PCB clip | 163 A 16949 X |
| 26 | 4-40 UNC Threaded rear spacer PCB clip | 163 A 16959 X |
| 44 | 4-40 UNC Threaded rear spacer PCB clip | 163 A 16969 X |
| 62 | 4-40 UNC Threaded rear spacer PCB clip | 163 A 16979 X |
| 78 | 4-40 UNC Threaded rear spacer PCB clip | 163 A 16989 X |
| 15 | M3 Threaded rear spacer PCB clip | 163 A 16999 X |
| 26 | M3 Threaded rear spacer PCB clip | 163 A 17009 X |
| 44 | M3 Threaded rear spacer PCB clip | 163 A 17019 X |
| 62 | M3 Threaded rear spacer PCB clip | 163 A 17029 X |
| 78 | M3 Threaded rear spacer PCB clip | 163 A 17039 X |

PCB clip .122"/3.1 ± .004"/0.10 mm hole diameter and .063"/1.6 mm circuit board thickness

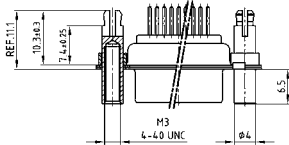

| SOCKET CONNECTOR | | |
|------------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Front/Threaded rear spacer PCB clip | 164 A 17459 X |
| 26 | 4-40 UNC Front/Threaded rear spacer PCB clip | 164 A 17469 X |
| 44 | 4-40 UNC Front/Threaded rear spacer PCB clip | 164 A 17479 X |
| 62 | 4-40 UNC Front/Threaded rear spacer PCB clip | 164 A 17489 X |
| 78 | 4-40 UNC Front/Threaded rear spacer PCB clip | 164 A 17499 X |
| 15 | M3 Front/Threaded rear spacer PCB clip | 164 A 17509 X |
| 26 | M3 Front/Threaded rear spacer PCB clip | 164 A 17519 X |
| 44 | M3 Front/Threaded rear spacer PCB clip | 164 A 17529 X |
| 62 | M3 Front/Threaded rear spacer PCB clip | 164 A 17539 X |
| 78 | M3 Front/Threaded rear spacer PCB clip | 164 A 17549 X |

| PLUG CONNECTOR | | |
|----------------|--|---------------|
| No. of pos. | Mounting style | Part Number |
| 15 | 4-40 UNC Front/Threaded rear spacer PCB clip | 163 A 17049 X |
| 26 | 4-40 UNC Front/Threaded rear spacer PCB clip | 163 A 17059 X |
| 44 | 4-40 UNC Front/Threaded rear spacer PCB clip | 163 A 17069 X |
| 62 | 4-40 UNC Front/Threaded rear spacer PCB clip | 163 A 17079 X |
| 78 | 4-40 UNC Front/Threaded rear spacer PCB clip | 163 A 17089 X |
| 15 | M3 Front/Threaded rear spacer PCB clip | 163 A 17099 X |
| 26 | M3 Front/Threaded rear spacer PCB clip | 163 A 17109 X |
| 44 | M3 Front/Threaded rear spacer PCB clip | 163 A 17119 X |
| 62 | M3 Front/Threaded rear spacer PCB clip | 163 A 17129 X |
| 78 | M3 Front/Threaded rear spacer PCB clip | 163 A 17139 X |

PCB clip .122"/3.1 ± .004"/0.10 mm hole diameter and .063"/1.6 mm circuit board thickness

PCB layout: Kat1iT9A

PCB layout: Kat1iU0A



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331