

HLMP-EJ37-ROPDD

T-1 ¾ (5mm) Precision Optical Performance

AllInGaP LED Lamp



Data Sheet

Description

This Precision Optical Performance AllInGaP LED provide superior light output for excellent readability in sunlight and are extremely reliable. AllInGaP LED technology provides extremely stable light output over long periods of time. Precision Optical Performance lamps utilize the Aluminium Indium Gallium Phosphide (AllInGaP) technology.

This LED lamp is orange tinted, nondiffused, T-1 ¾ package incorporating second generation optics producing well defined spatial radiation at specific viewing cone angle. This lamp is made with an advanced optical grade epoxy, offering superior high temperature and high moisture resistance performance in outdoor signal and sign applications.

The high maximum LED junction temperature limit of +130°C enables high temperature operation in bright sunlight conditions. The package epoxy contains both uv-a and uv-b inhibitors to reduce the effects of long term exposure to direct sunlight.

Features

- Well defined Spatial radiation Patterns
- High Luminous Output
- AllInGaP Orange
- High Operating Temperature: $T_{JLED} = +130^{\circ}\text{C}$
- Superior Resistance to moisture


Applications

- Commercial Outdoor Advertising:
 - Signs
 - Marquees
- Variable Message Sign

Benefits

- Superior Light Output performance In Outdoor Environments
- Suitable for Auto-insertion into PC Boards

Package Dimensions

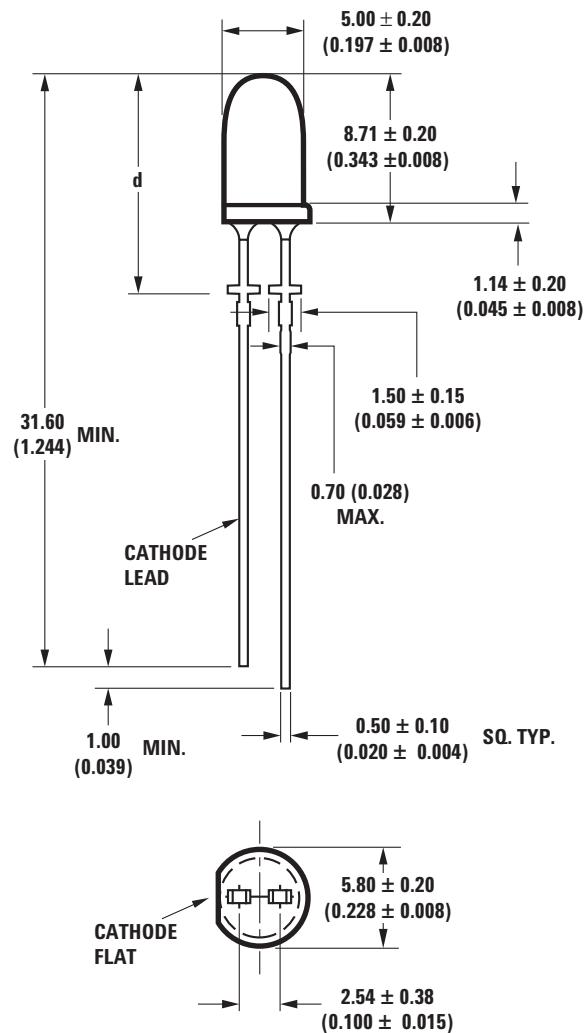

Notes :

1. All dimensions are in milimetres (inches).
2. Leads are mild steel, solder dipped.
3. Tapers shown at top of leads (bottom of lamp package) indicate an epoxy meniscus that may extend about 1mm (0.040in.) down the leads.
4. Recommended PC board hole diameters = 0.965/0.889 (0.038/0.035)
5. For dome heights above lead standoff seating plane, d = 11.96 ± 0.25 (0.471 ± 0.010).

Device Selection Guide

Part Number	Dominant Wavelength Range (nm)	Luminous Intensity, Min (mcd at 20mA)
HLMP-EJ37-R0PDD	605.5 -612.5	1500

Tolerance for luminous intensity is ±15%.

Tolerance for color bin limit is ± 0.5 nm

Notes:

1. The luminous intensity is measured on the mechanical axis of the lamp package.
3. The optical axis is closely aligned with the package mechanical axis.
4. The dominant wavelength, Id, is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
5. 01/2 is the off axis angle where the luminous intensity is one half the on-axis intensity.

Absolute Maximum Rating ($T_A=25^\circ\text{C}$)

Parameters	Value
DC forward current ^[1]	50 mA
Peak pulsed forward current ^[2]	100 mA
Average forward current	30 mA
Reverse voltage ($I_r = 100$ mA)	5 V
LED junction temperature	130°C
Power Dissipation	120mW
Operating temperature	-40°C to +100°C
Storage temperature	-40°C to +120°C
Through the wave soldering temperature	250°C for 3 seconds

Note:

1. Derate linearly as shown in figure 4.
2. For long terms performance with minimum light output degradation, drive currents between 10mA and 30 mA are recommended. For more information on recommended drive condition, please refer to Application Brief I-024.
3. Operating at current below 1mA is not recommended. Please contact your local representative for further information.

Electrical and Optical Characteristics ($T_A=25^\circ\text{C}$)

Parameters	Min	Typ	Max	Unit	Test Condition
Forward voltage		1.98	2.40	V	$I_F = 20 \text{ mA}$
Reverse voltage	5	20		V	$I_R = 100 \mu\text{A}$
Peak Wavelength		609		nm	Peak wavelength of spectral distribution at $I_F = 20 \text{ mA}$
Spectral Halfwidth		17		nm	Wavelength width at spectral distribution $\frac{1}{2}$ power point at $I_F = 20 \text{ mA}$
Speed of Response		20		ns	Exponential time constant
Capacitance		40		pF	$V_F=0, f=1 \text{ MHz}$
Thermal Resistance		240		°C/W	LED Junction to cathode

Notes:

1. The radiant intensity, I_e in watts per steradian, may be found from the equation $I_e = I_v/hV$ where I_v is the luminous intensity in candelas and hV is the luminous efficacy in lumens/watt.

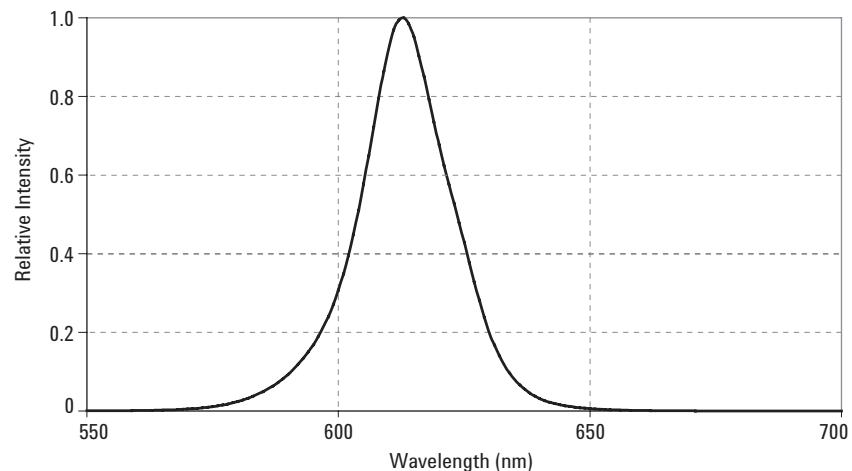


Figure 1. Relative Intensity vs. Peak Wavelength

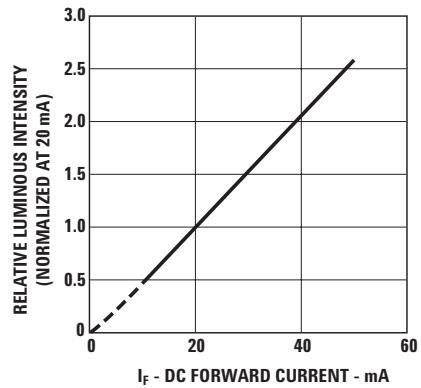


Figure 3. Relative Luminous Intensity vs. Forward Current

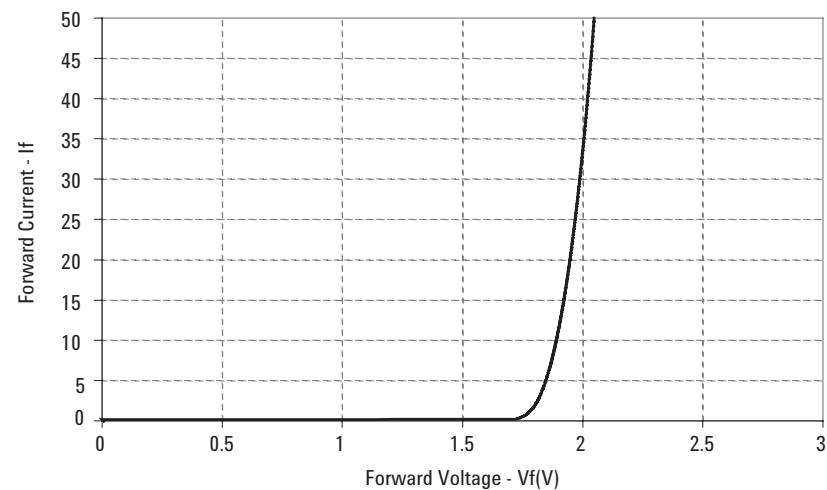


Figure 2. Forward Current vs. Forward Voltage

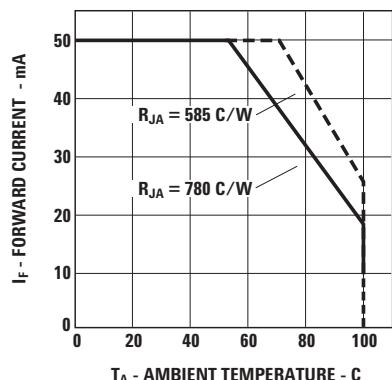


Figure 4. Maximum Forward Current vs. Ambient Temperature.

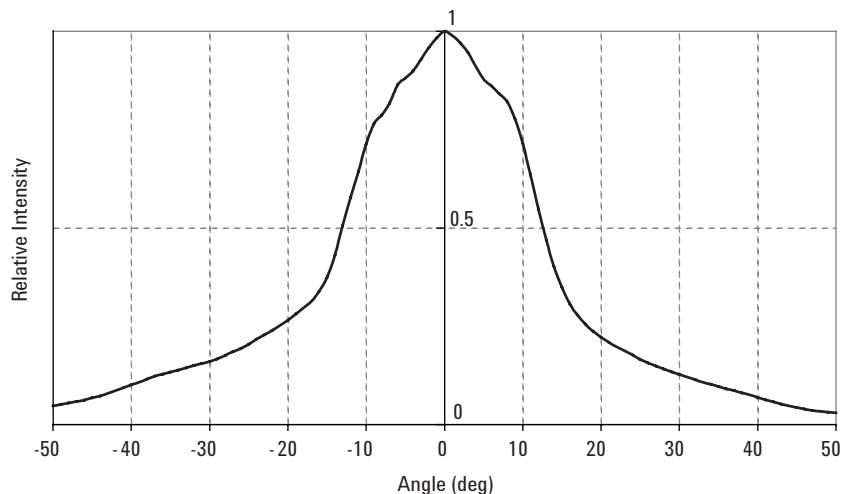


Figure 5. Spatial Radiation pattern

**Intensity Bin Limits
(mcd at 20 mA)**

Bin Name	Min.	Max.
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200
V	4200	5500

Tolerance for each bin limits is $\pm 15\%$

**Color Bin Limits
(nm at 20 mA)**

Bin Name	Min.	Max.
CA	605.5	609
CB	609	612.5

Tolerance for each bin limits is $\pm 0.5\text{nm}$

Note:

1. Bin categories are established for classification of products. Product may not be available in all bin categories.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Limited in the United States and other countries.
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved.
5989-1391EN - May 29, 2006

AVAGO
TECHNOLOGIES



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331