# Programmable - High Performance SMD Crystal Oscillator

## ASG-C Series




7.0 x 5.0 x 2.0mm

**Moisture Sensitivity Level (MSL) - This product is Hermetically Sealed and not Moisture Sensitive; therefore MSL = N/A (Not Applicable)**

Pb RoHS Compliant

### FEATURES:

- ASG series is a High Performance crystal based oscillator; available either as an XO or a VCXO
- Frequency range from 10MHz to 250MHz with LVCMOS output
- Available from 10MHz to 1.50GHz with LVDS or LVPECL output
- Offered with either 2.50V or 3.30V bias voltage
- Quick turn, 1~5 business days for small quantity orders

### APPLICATIONS:

- Networking, SONET/SDH
- WiMax / WLAN
- Computing
- Phase Locked Loops
- Direct Digital Synthesis (DDS)
- DSL/ADSL
- Base Terminal Stations

### STANDARD SPECIFICATIONS:

| Parameters | | Minimum | Typical | Maximum | Units | Notes |
|---|---|---|---|---|---|---|
| Frequency Range: | $V_{dd}$ = 3.3V | 10 | | 250 | MHz | |
| | $V_{dd}$ = 2.5V | 10 | | 250 | MHz | |
| Operating Temperature: | | -40 | | +85 | °C | |
| Storage Temperature: | | -55 | | +125 | °C | |
| Overall Frequency Stability: | | -50 | | +50 | ppm | *See Note # 1* |
| Initial Set Tolerance | | -5.00 | ≤ ±1.00 | +5.00 | ppm | |
| Stability over operating temperature | | -35.00 | ≤ ±20.00 | +35.00 | ppm | |
| Aging @ 25ºC over 10-years | | -7.00 | | +7.00 | ppm | |
| Frequency variation over supply voltage change (±5%) | | -2.00 | | +2.00 | ppm | |
| Frequency variation over load variation (15pF ± 5%) | | -1.00 | | +1.00 | ppm | |
| Supply Voltage (Vdd): | $V_{dd}$ = 3.3V | 3.135 | 3.300 | 3.465 | V | |
| | $V_{dd}$ = 2.5V | 2.375 | 2.500 | 2.625 | V | |
| Input Current: | $V_{dd}$ = 3.3V | | | 45 | mA | Frequency dependent |
| | $V_{dd}$ = 2.5V | | | 35 | mA | Frequency dependent |
| Symmetry: | | 48 | 50 | 52 | % | @ 1/2Vdd |
| Rise and Fall Time (Tr/Tf): | | | ≤ 450 | 1000 | ps | |
| Output Load: | | | | 15 | pF | CMOS |
| Output Voltage: | VOH | Vdd * 0.90 | | | V | |
| | VOL | | | Vdd * 0.10 | V | |
| Start-up Time: | | | ≤ 2.0 | 3.0 | ms | |
| Enable/Disable Function : | | "1" ($V_{IH}$ ≥ 0.7*Vdd) or Open: Oscillation<br>"0" ($V_{IL}$ < 0.3*Vdd) : High Z | | | | |
| Vcontrol Range | | 0.00 | | Vdd | Volts | |
| Frequency Pull | | ±50 | | | ppm | |
| Control Port Bandwidth | | 10 | | | kHz | |
| Phase jitter RMS [ tjit(φ) ] *See Note #2* | Integer Mode | | < 0.60 | 1.60 | ps | 12kHz to 20MHz |
| | Fractional Mode | | < 0.90 | 1.60 | ps | 12kHz to 20MHz |

*Note #1:* Inclusive of initial tolerance at 25ºC±3ºC, operating temperature range, input voltage variation, load variation & aging.
*Note #2*: The rms jitter over 12kHz to 20MHz Bandwidth is dependent on the carrier and whether or not the final frequency is achieved without engaging the Fractional Mode



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

# Programmable - High Performance SMD Crystal Oscillator

## ASG-C Series

RoHS Compliant




7.0 x 5.0 x 2.0mm

## OVERALL SYSTEM BLOCK DIAGRAM




## PHASE NOISE & JITTER CHARACTERISTICS

### 100MHz Carrier




### 156.25MHz Carrier

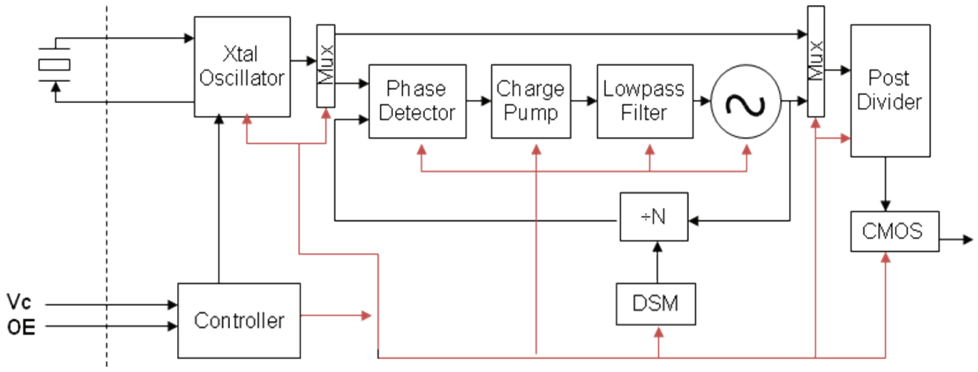

# Programmable - High Performance SMD Crystal Oscillator

## ASG-C Series

RoHS Compliant

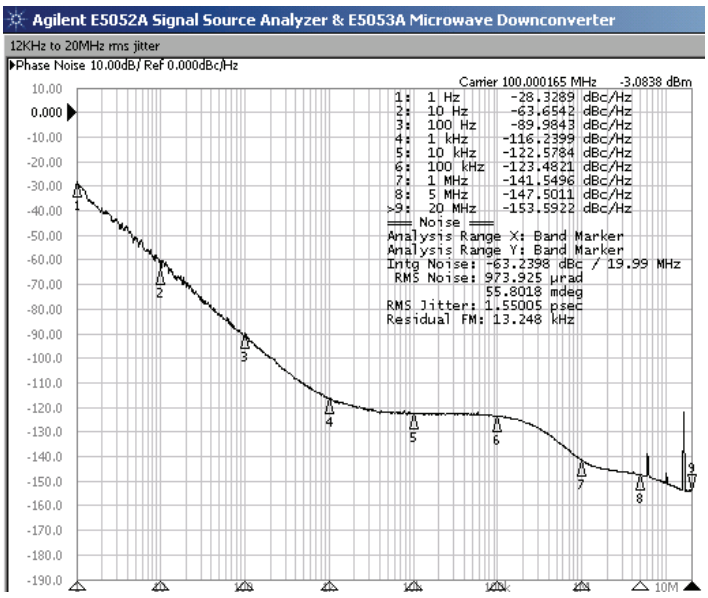


7.0 x 5.0 x 2.0mm
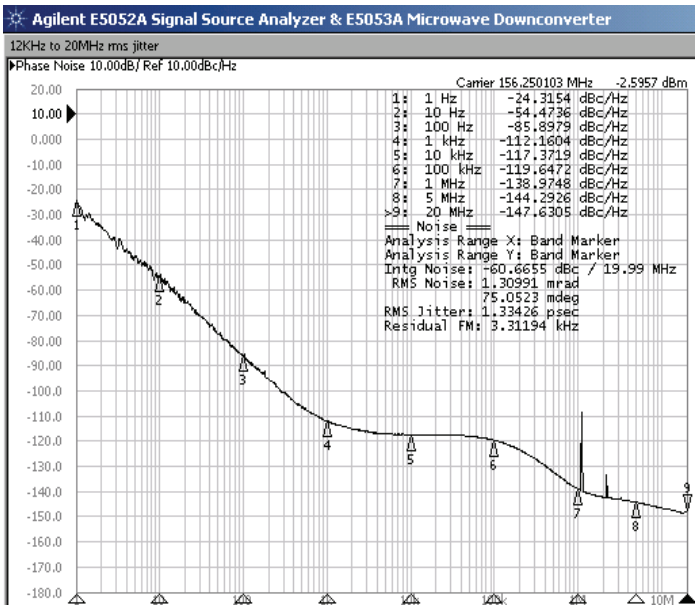
### FREQUENCY STABILITY VS. TEMPERATURE




### FREQUENCY PULLING VS. CONTROL VOLTAGE (VCXO MODE)




### PART IDENTIFICATION:

ASG - C - ☐ - ☐ - ☐ MHz - ☐
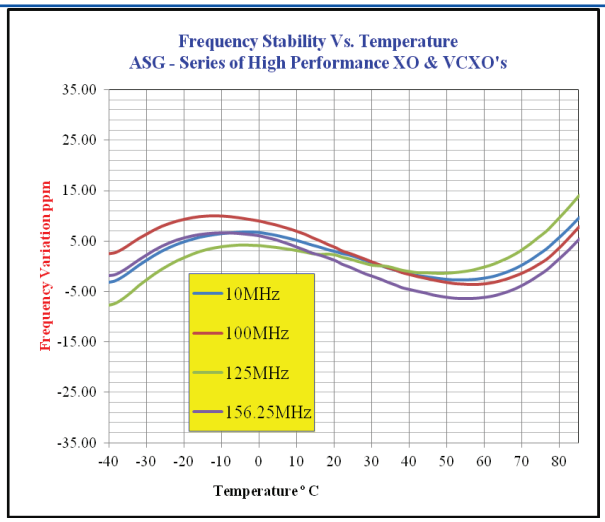
| Fixed or Pull-able | Operating Voltage | Frequency in MHz | Packaging |
|---|---|---|---|
| X = Fixed Oscillator | 3.30V = A | Please specify the Frequency in MHz e.g. 100.000 MHz | Blank = Bulk |
| V = VCXO | 2.50V = B | | T = Tape & Reel |

### MARKING:

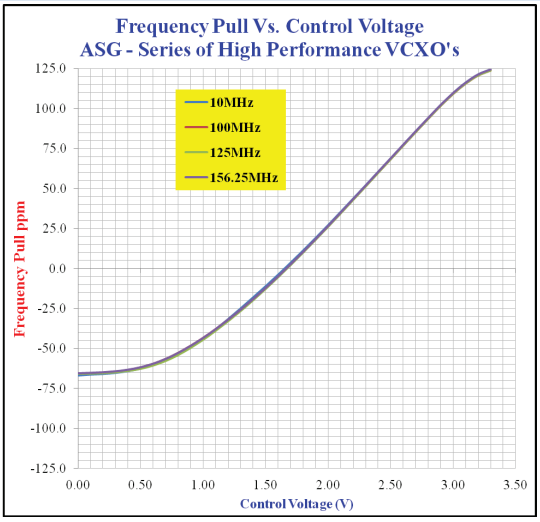



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

# Programmable - High Performance SMD Crystal Oscillator

## ASG-C Series

RoHS Compliant

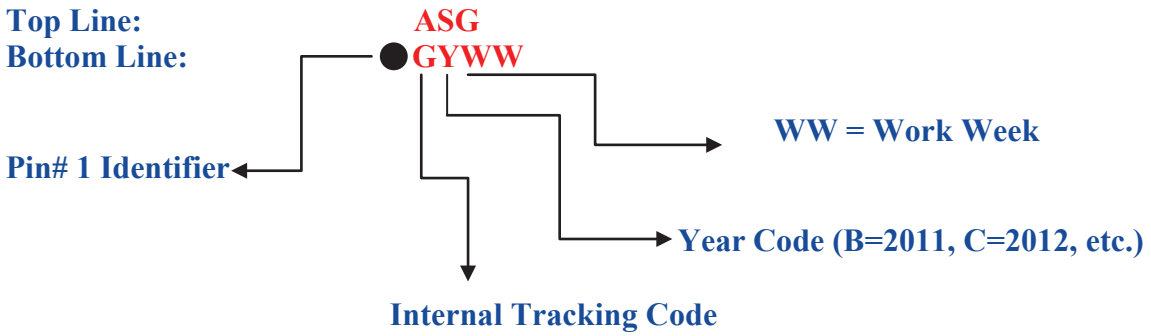


7.0 x 5.0 x 2.0mm

## OUTLINE DIMENSIONS:

| Pin # | Pin Description For VCXO configuration |
|---|---|
| 1 | Voltage Control for VCXO |
| 2 | Output Enable (OE) |
| 3 | GND |
| 4 | RF Output |
| 5 | N/C |
| 6 | Vdd |

| Pin # | Pin Description For XO configuration |
|---|---|
| 1 | Output Enable (OE) |
| 2 | N/C for XO |
| 3 | GND |
| 4 | RF Output |
| 5 | N/C |
| 6 | Vdd |




## REFLOW PROFILE:



# Programmable - High Performance SMD Crystal Oscillator

## ASG-C Series

RoHS Compliant

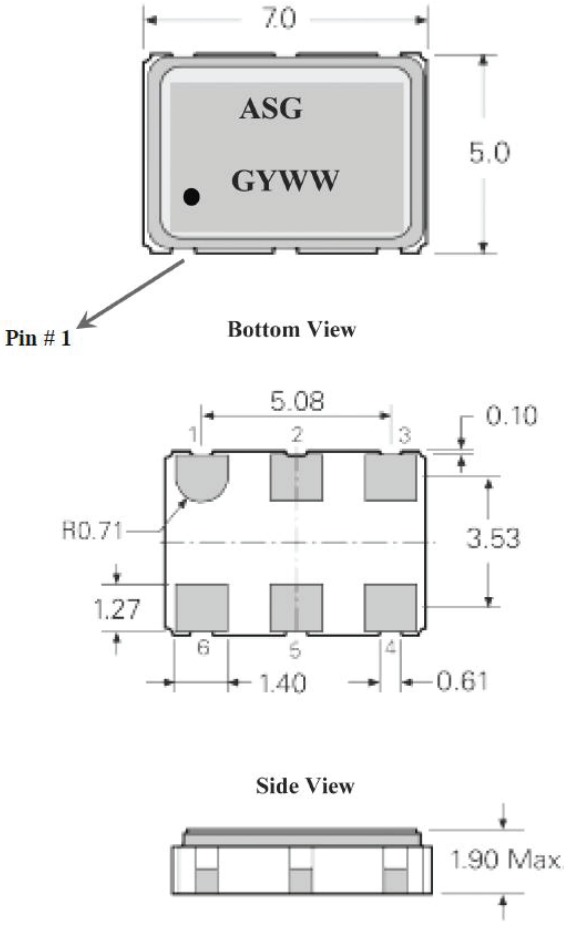


7.0 x 5.0 x 2.0mm
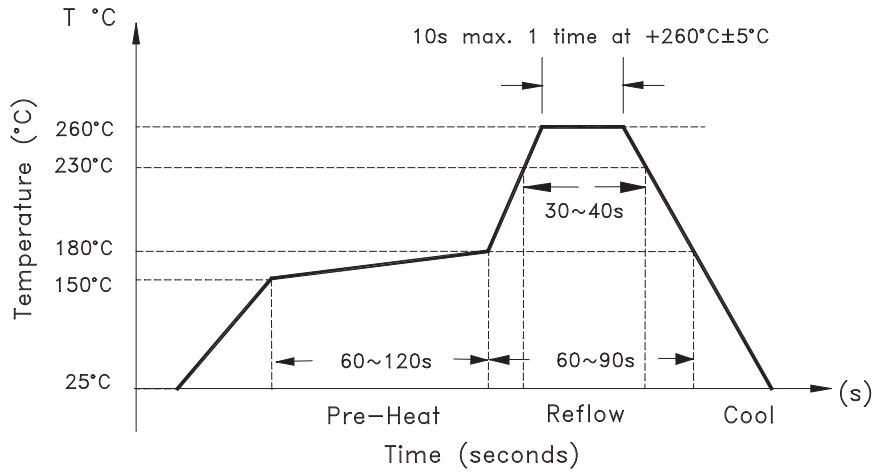
## TAPE & REEL:

### T= Tape and reel (2,000pcs/reel)

TAPE DETAIL (SCALE 2 : 1)




REEL DETAIL (SCALE 1 : 2.5)




**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

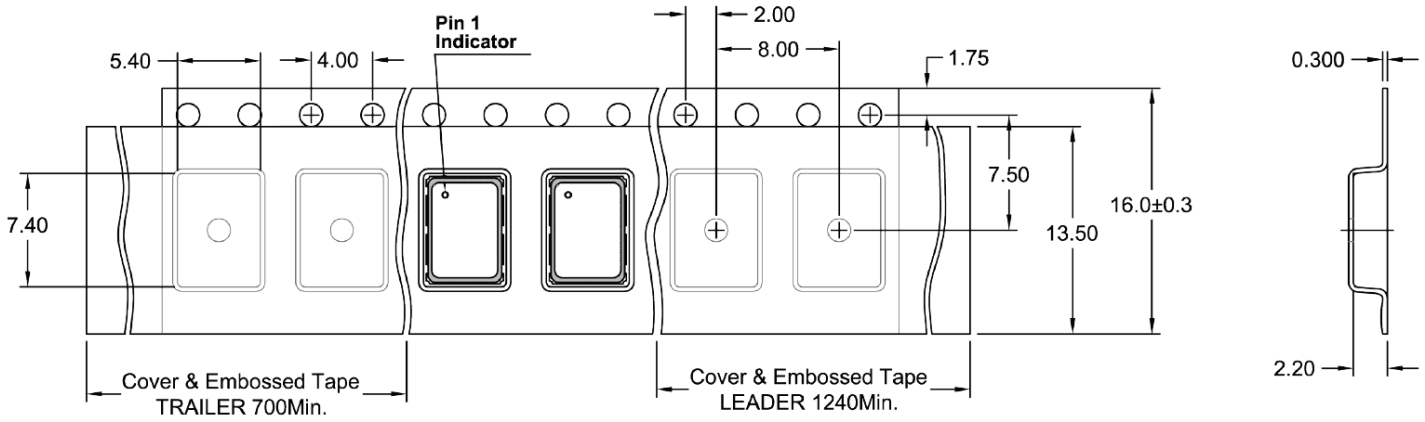

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Стандарт Электрон Связь

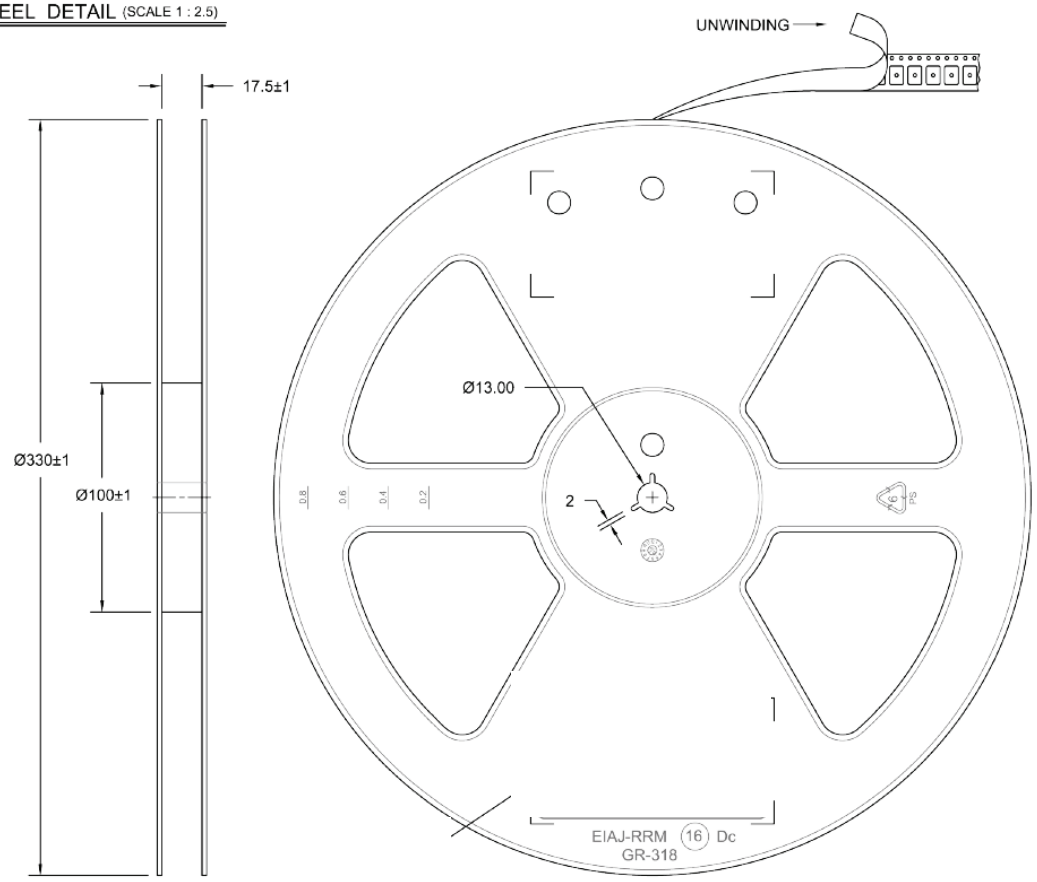Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** sales@st-electron.ru

**Адрес:** 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331