

HiPerFRED


$$\begin{aligned} V_{RRM} &= 600 \text{ V} \\ I_{FAV} &= 6 \text{ A} \\ t_{rr} &= 20 \text{ ns} \end{aligned}$$

High Performance Fast Recovery Diode
 Low Loss and Soft Recovery
 Single Diode


Part number

DSEP6-06AS

Marking on Product: 6P060AS



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: TO-252 (DPak)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0


Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
I _R	reverse current, drain current	V _R = 600 V	T _{VJ} = 25°C			50	μA	
		V _R = 600 V	T _{VJ} = 150°C			0.2	mA	
V _F	forward voltage drop	I _F = 6 A	T _{VJ} = 25°C			2.03	V	
		I _F = 12 A				2.22	V	
		I _F = 6 A	T _{VJ} = 150°C			1.34	V	
		I _F = 12 A				1.55	V	
I _{FAV}	average forward current	T _C = 150°C rectangular d = 0.5	T _{VJ} = 175°C			6	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		1.00	V	
r _F	slope resistance					34	mΩ	
R _{thJC}	thermal resistance junction to case					2.8	K/W	
R _{thCH}	thermal resistance case to heatsink				0.50		K/W	
P _{tot}	total power dissipation	T _C = 25°C				55	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		40	A	
C _J	junction capacitance	V _R = 400 V f = 1 MHz		T _{VJ} = 25°C	5		pF	
I _{RM}	max. reverse recovery current	} I _F = 6 A; V _R = 300 V -di _F /dt = 200 A/μs		T _{VJ} = 25 °C	3		A	
t _{rr}	reverse recovery time			T _{VJ} = 100 °C	5		A	
				T _{VJ} = 25 °C		20		ns
				T _{VJ} = 100 °C		80		ns

Package TO-252 (DPak)			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			20	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				0.3		g
F_c	mounting force with clip		20		60	N

Product Marking

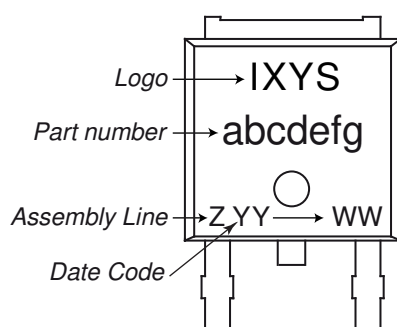


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP6-06AS-TRL	6P060AS	Tape & Reel	2500	509806
Alternative	DSEP6-06AS-TUB	6P060AS	Tube	70	524993

Similar Part	Package	Voltage class
DSEP6-06BS	TO-252AA (DPak)	600

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 175^{\circ}\text{C}$

			Fast Diode	
$V_{0\max}$	threshold voltage	1		V
$R_{0\max}$	slope resistance *	30		mΩ

Technical drawing of a 12.5mm x 12.5mm connector. The drawing includes a top view, a side view, and a detail view of the bottom contact. Dimensions are provided in millimeters (mm) and inches.

Top View Dimensions:

- Overall width: 12.5 mm (0.492 inches)
- Overall height: 12.5 mm (0.492 inches)
- Pin pitch (center-to-center): 2.54 mm (0.1 inches)
- Pin diameter: 0.8 mm (0.031 inches)
- Pin spacing (edge-to-center): 1.27 mm (0.05 inches)
- Pin diameter (alternative): 0.7 mm (0.028 inches)
- Pin diameter (alternative): 0.6 mm (0.024 inches)
- Pin diameter (alternative): 0.5 mm (0.020 inches)
- Pin diameter (alternative): 0.4 mm (0.016 inches)
- Pin diameter (alternative): 0.3 mm (0.012 inches)
- Pin diameter (alternative): 0.2 mm (0.008 inches)
- Pin diameter (alternative): 0.1 mm (0.004 inches)
- Pin diameter (alternative): 0.05 mm (0.002 inches)
- Pin diameter (alternative): 0.02 mm (0.001 inches)
- Pin diameter (alternative): 0.01 mm (0.0005 inches)

Side View Dimensions:


- Overall height: 12.5 mm (0.492 inches)
- Pin height: 2.54 mm (0.1 inches)
- Pin diameter: 0.8 mm (0.031 inches)
- Pin diameter (alternative): 0.7 mm (0.028 inches)
- Pin diameter (alternative): 0.6 mm (0.024 inches)
- Pin diameter (alternative): 0.5 mm (0.020 inches)
- Pin diameter (alternative): 0.4 mm (0.016 inches)
- Pin diameter (alternative): 0.3 mm (0.012 inches)
- Pin diameter (alternative): 0.2 mm (0.008 inches)
- Pin diameter (alternative): 0.1 mm (0.004 inches)
- Pin diameter (alternative): 0.05 mm (0.002 inches)
- Pin diameter (alternative): 0.02 mm (0.001 inches)
- Pin diameter (alternative): 0.01 mm (0.0005 inches)

Detail View Dimensions:

- Overall width: 12.5 mm (0.492 inches)
- Overall height: 12.5 mm (0.492 inches)
- Pin pitch (center-to-center): 2.54 mm (0.1 inches)
- Pin diameter: 0.8 mm (0.031 inches)
- Pin spacing (edge-to-center): 1.27 mm (0.05 inches)
- Pin diameter (alternative): 0.7 mm (0.028 inches)
- Pin diameter (alternative): 0.6 mm (0.024 inches)
- Pin diameter (alternative): 0.5 mm (0.020 inches)
- Pin diameter (alternative): 0.4 mm (0.016 inches)
- Pin diameter (alternative): 0.3 mm (0.012 inches)
- Pin diameter (alternative): 0.2 mm (0.008 inches)
- Pin diameter (alternative): 0.1 mm (0.004 inches)
- Pin diameter (alternative): 0.05 mm (0.002 inches)
- Pin diameter (alternative): 0.02 mm (0.001 inches)
- Pin diameter (alternative): 0.01 mm (0.0005 inches)

Dim.	Millimeters		Inches	
	min	max	min	max
A	2.20	2.40	0.087	0.094
A1	2.10	2.50	0.083	0.098
b	0.66	0.86	0.026	0.034
b2	-	0.96	-	0.038
b3	5.04	5.64	0.198	0.222
b4	4.34	BSC	0.171	BSC
b5	0.50	BSC	0.020	BSC
c	0.40	0.86	0.016	0.034
D	5.90	6.30	0.232	0.248
E	6.40	6.80	0.252	0.268
e	2.10	2.50	0.083	0.098
H	9.20	10.10	0.362	0.398
L	0.55	1.28	0.022	0.050
L1	2.50	2.90	0.098	0.114
L2	0.40	0.60	0.016	0.024
L3	0.50	0.90	0.020	0.035
L4	0.60	1.00	0.024	0.039
L5	0.82	1.22	0.032	0.048
L6	0.79	0.99	0.031	0.039
L7	0.81	1.01	0.032	0.040
L8	0.40	0.80	0.016	0.031
L9	1.50	BSC	0.059	BSC
Ø P	1.00	BSC	0.039	BSC

Recommended
min. foot print



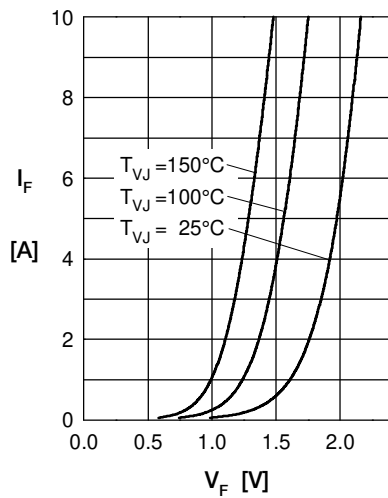
Fast Diode


Fig. 1 Forward current
 I_F versus V_F

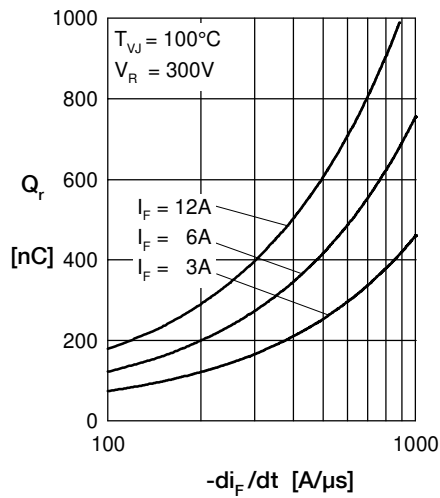


Fig. 2 Typ. reverse recov. charge
 Q_r versus $-di_F/dt$

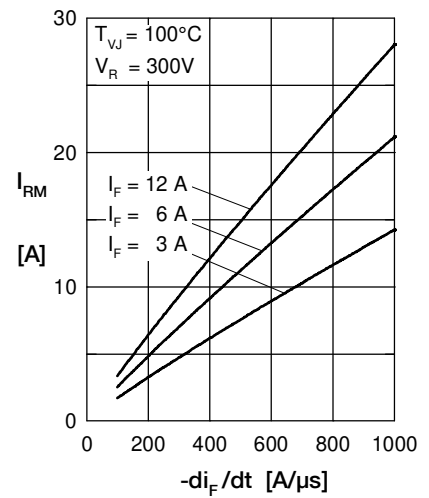


Fig. 3 Typ. peak reverse current
 I_{RM} versus $-di_F/dt$

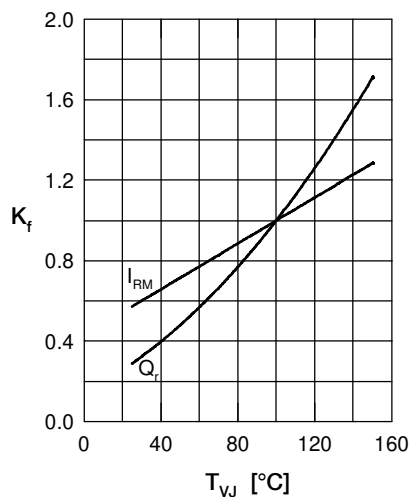


Fig. 4 Typ. dynamic parameters
 Q_r , I_{RM} versus T_{VJ}

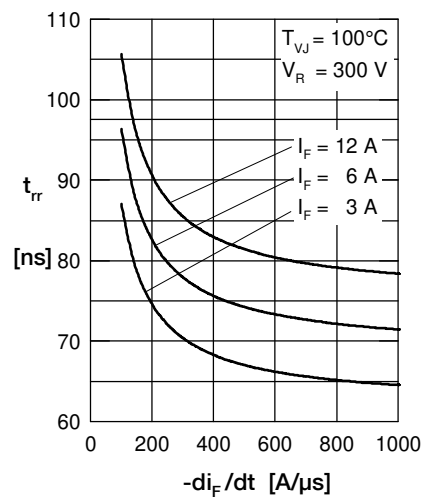


Fig. 5 Recovery time
 t_{rr} versus $-di_F/dt$

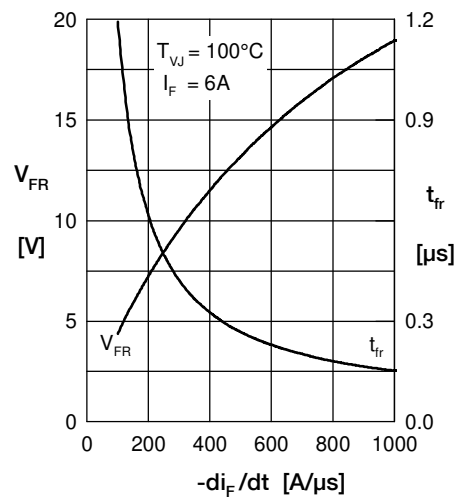


Fig. 6 Typ. peak forward voltage
 V_{FR} and t_{fr} versus di_F/dt

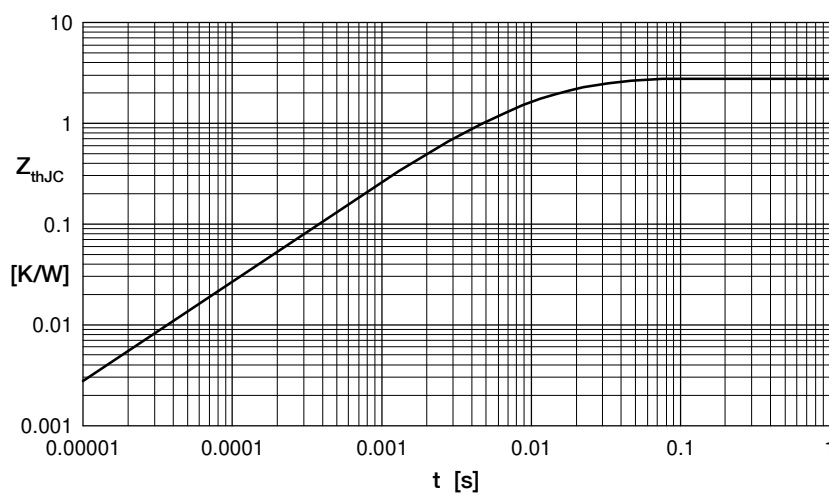


Fig. 7 Transient thermal resistance junction to case



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331