


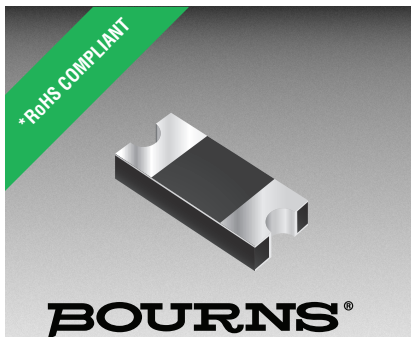

## Features

- RoHS compliant\*
- Low profile
- Low power loss, high efficiency
- UL 94V-0 classification

## Applications

- Switching Mode Power Supplies
- Portable equipment batteries
- High frequency rectification
- DC/DC Converters
- Telecommunications

## CD214A-B2xR Series Schottky Barrier Rectifier Chip Diode

### General Information

Portable communications, computing and video equipment manufacturers are challenging the semiconductor industry to develop increasingly smaller electronic components.

Bourns offers Schottky Rectifier Diodes for rectification applications, in a compact chip package compatible with DO-214AC (SMA) size format. The Schottky Rectifier Diodes offer a forward current of 2 A with a choice of repetitive peak reverse voltage of 20 V up to 60 V.



### Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Parameter                                                         | Symbol      | CD214A-     |        |       |        |       | Unit             |
|-------------------------------------------------------------------|-------------|-------------|--------|-------|--------|-------|------------------|
|                                                                   |             | B220R       | B220LR | B240R | B240LR | B260R |                  |
| Maximum Repetitive Peak Reverse Voltage                           | $V_{RRM}$   | 20          | 20     | 40    | 40     | 60    | V                |
| Maximum Average Forward Current                                   | $I_{F(AV)}$ | 2           |        |       |        |       | A                |
| Maximum Peak Forward Surge Current (8.3 ms Single Half Sine-Wave) | $I_{FSM}$   | 50          |        |       |        |       | A                |
| Operating Junction Temperature Range                              | $T_{OPR}$   | -55 to +125 |        |       |        |       | $^\circ\text{C}$ |
| Storage Temperature Range                                         | $T_{STG}$   | -55 to +150 |        |       |        |       | $^\circ\text{C}$ |

### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Parameter                                      | Symbol              | Condition or Model                     |                                              | Min. | Typ.  | Max. | Unit               |
|------------------------------------------------|---------------------|----------------------------------------|----------------------------------------------|------|-------|------|--------------------|
| Maximum Instantaneous Forward Voltage (NOTE 1) | $V_F$               | $I_F = 1\text{ A}$                     | CD214A-B220R<br>CD214A-B240R                 |      | 0.41  |      | V                  |
|                                                |                     |                                        | CD214A-B260R                                 |      | 0.5   |      |                    |
|                                                |                     |                                        | CD214A-B220LR<br>CD214A-B240LR               |      | 0.34  |      |                    |
|                                                |                     | $I_F = 2\text{ A}$                     | CD214A-B220R<br>CD214A-B240R                 |      | 0.49  | 0.5  |                    |
|                                                |                     |                                        | CD214A-B260R                                 |      | 0.6   | 0.7  |                    |
|                                                |                     |                                        | CD214A-B220LR<br>CD214A-B240LR               |      | 0.39  | 0.4  |                    |
| DC Reverse Current                             | $I_R$               | $V_R = V_{RRM}$                        | CD214A-B220R<br>CD214A-B240R<br>CD214A-B260R |      | 0.025 | 0.2  | mA                 |
|                                                |                     |                                        | CD214A-B220LR<br>CD214A-B240LR               |      | 0.28  | 1    |                    |
| Typical Junction Capacitance                   | $C_J$               | $V_R = 4\text{ V}, f = 1.0\text{ MHz}$ |                                              |      | 115   |      | pF                 |
| Typical Thermal Resistance (NOTE 2)            | Junction to Ambient | $R_{\theta JA}$                        | CD214A-B220R<br>CD214A-B240R<br>CD214A-B260R |      | 75    |      | $^\circ\text{C/W}$ |
|                                                |                     |                                        | CD214A-B220LR<br>CD214A-B240LR               |      | 70    |      |                    |
|                                                | Junction to Lead    | $R_{\theta JL}$                        |                                              |      | 17    |      |                    |

NOTES: (1) Pulse width 300 microsecond, 1 % duty cycle.

(2) Mounted on PCB with 5.0 x 5.0 mm (0.2 x 0.2 inch) copper pad areas.

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# CD214A-B2xR Series Schottky Barrier Rectifier Chip Diode


**BOURNS®**

## Performance Graphs


### Forward Current Derating Curve

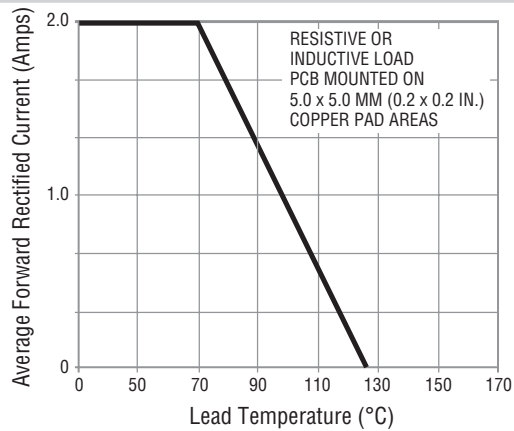


### Maximum Peak Forward Surge Current

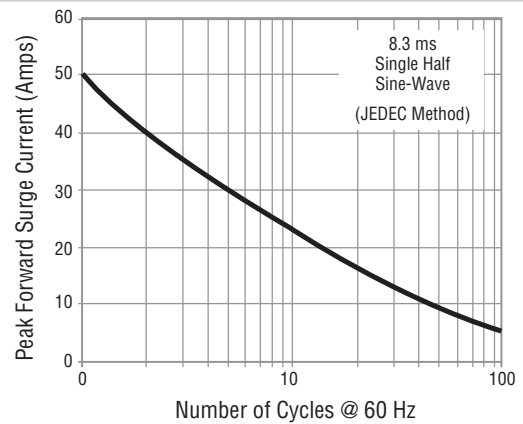


### Typical Instantaneous Forward Characteristics

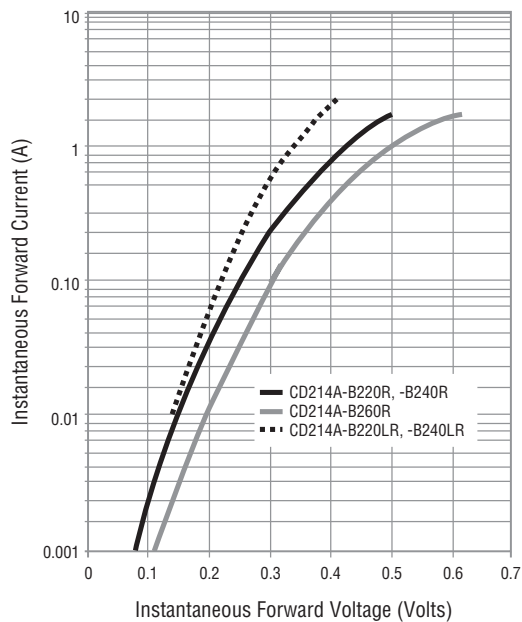

### Typical Reverse Characteristics

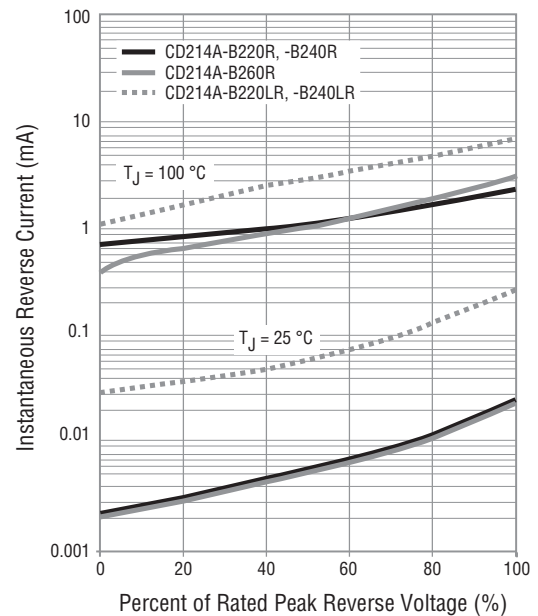

### Typical Junction Capacitance

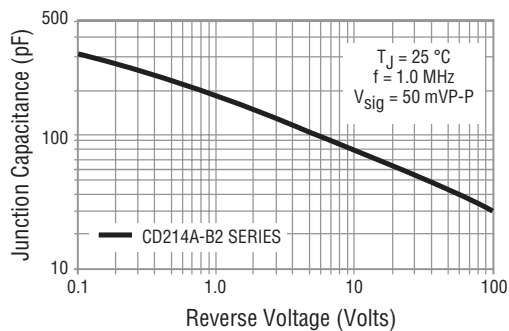


Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# CD214A-B2xR Series Schottky Barrier Rectifier Chip Diode

**BOURNS®**

## Product Dimensions

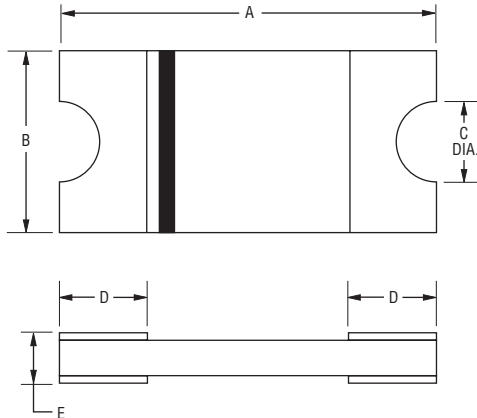

| Dimension | CD214A-B2 Series                            |
|-----------|---------------------------------------------|
| A         | $4.5 \pm 0.10$<br>(0.177 ± 0.004)           |
| B         | $2.20 \pm 0.10$<br>(0.087 ± 0.004)          |
| C (Dia.)  | $0.50$<br>(0.020)                           |
| D         | $0.95 \pm 0.20$<br>(0.037 ± 0.008)          |
| E         | $0.96 +0.20/-0.10$<br>(0.038 +0.008/-0.004) |


DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

## How to Order

**CD 214A - B 2 20 L R**

Common Code \_\_\_\_\_  
 CD = Chip Diode  
 Package \_\_\_\_\_  
 214A = SMA/DO-214AC Compatible  
 Model \_\_\_\_\_  
 B = Schottky Barrier Series  
 Maximum Average Forward Rectified Current \_\_\_\_\_  
 2 = 2 A  
 Maximum Repetitive Peak Reverse Voltage \_\_\_\_\_  
 20 = 20 V  
 40 = 40 V  
 60 = 60 V  
 Forward Voltage Suffix \_\_\_\_\_  
 L = Low Forward Voltage

## Recommended Pad Layout

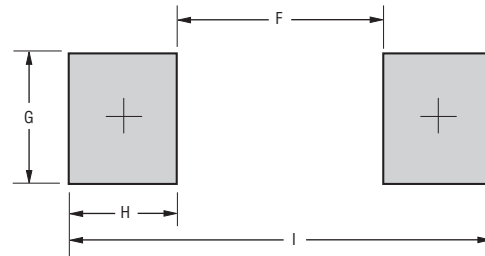


| Dimension | CD214A-B2 Series            |
|-----------|-----------------------------|
| F         | $\frac{2.60}{(0.102)}$ MAX. |
| G         | $\frac{1.47}{(0.058)}$ MIN. |
| H         | $\frac{1.27}{(0.050)}$ MIN. |
| I         | $\frac{5.14}{(0.202)}$ REF. |

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

## Environmental Specifications

Moisture Sensitivity Level ..... 1  
 ESD Classification (HBM) ..... 3B

## Typical Part Marking

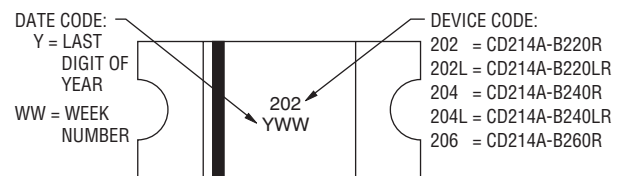

Specifications are subject to change without notice.



The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# CD214A-B2xR Series Schottky Barrier Rectifier Chip Diode

**BOURNS®**

## Packaging Information

The product is dispensed in tape and reel format (see diagram below).

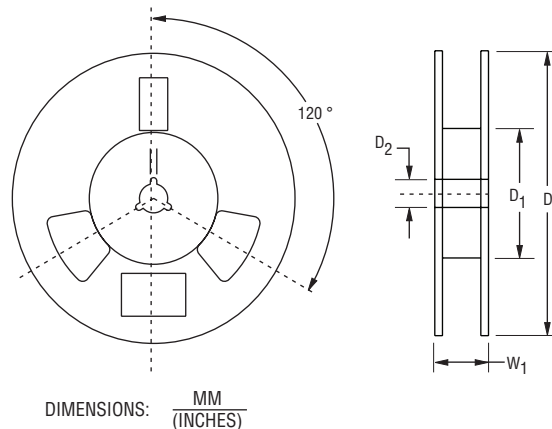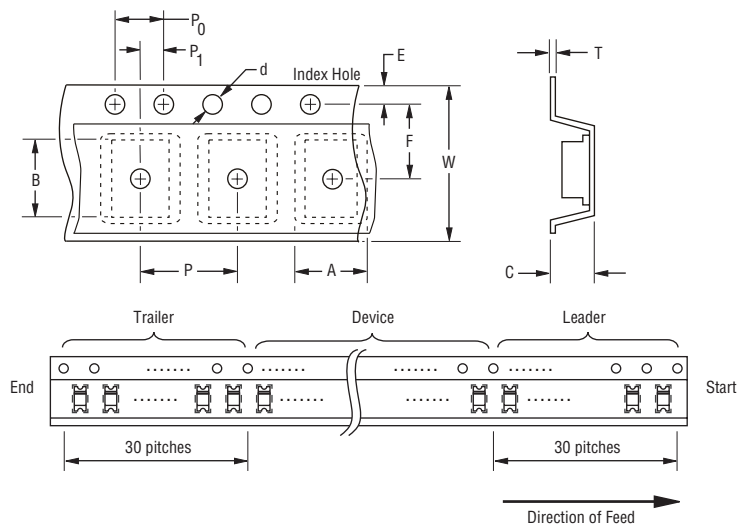

| Item                   | Symbol         | CD214A-B2 Series                           |
|------------------------|----------------|--------------------------------------------|
| Carrier Width          | A              | $\frac{2.45 \pm 0.10}{(0.096 \pm 0.004)}$  |
| Carrier Length         | B              | $\frac{4.75 \pm 0.10}{(0.187 \pm 0.004)}$  |
| Carrier Depth          | C              | $\frac{1.51 \pm 0.10}{(0.059 \pm 0.004)}$  |
| Sprocket Hole          | d              | $\frac{1.50 \pm 0.10}{(0.059 \pm 0.004)}$  |
| Reel Outside Diameter  | D              | $\frac{178 \pm 2.0}{(7.008 \pm 0.079)}$    |
| Reel Inner Diameter    | D <sub>1</sub> | $\frac{50.0}{(1.969)} \text{ MIN.}$        |
| Feed Hole Diameter     | D <sub>2</sub> | $\frac{13.0 \pm 0.50}{(0.512 \pm 0.020)}$  |
| Sprocket Hole Position | E              | $\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$  |
| Punch Hole Position    | F              | $\frac{5.50 \pm 0.05}{(0.217 \pm 0.002)}$  |
| Punch Hole Pitch       | P              | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$  |
| Sprocket Hole Pitch    | P <sub>0</sub> | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$  |
| Embossment Center      | P <sub>1</sub> | $\frac{2.00 \pm 0.10}{(0.079 \pm 0.004)}$  |
| Overall Tape Thickness | T              | $\frac{0.40}{(0.016)} \text{ MAX.}$        |
| Tape Width             | W              | $\frac{12.00 \pm 0.30}{(0.472 \pm 0.012)}$ |
| Reel Width             | W <sub>1</sub> | $\frac{18.7}{(0.736)} \text{ MAX.}$        |
| Quantity per Reel      | --             | 3,000                                      |

**BOURNS®**

### Asia-Pacific:

Tel: +886-2 2562-4117  
Email: asiacus@bourns.com

### Europe:

Tel: +36 88 520 390  
Email: eurocus@bourns.com

### The Americas:

Tel: +1-951 781-5500  
Email: americus@bourns.com

**www.bourns.com**

01/18

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331