

DESCRIPTION:

SIZE 17 MOTOR WITH EXTERNAL MOTOR MODULE 0.75 INCH STACK

B
SIZE

	PART NO.
--	----------

SHEET 1 OF 2

SCALE: 1.000 : 1

DRAFTED: A.Schapker

DRFT DATE: 02/13/02


APPROVED:

APPR DATE:

TOLERANCES
(EXCEPT AS SPECIFIED)

X.XX ± 0.010
X.XXX ± 0.005
X.XXXX ± 0.0005
ANGLES ± 2°
Ø WITHIN .005 CONC
UNLESS SPECIFIED

REV	ECO #	DATE
A		02/13/03

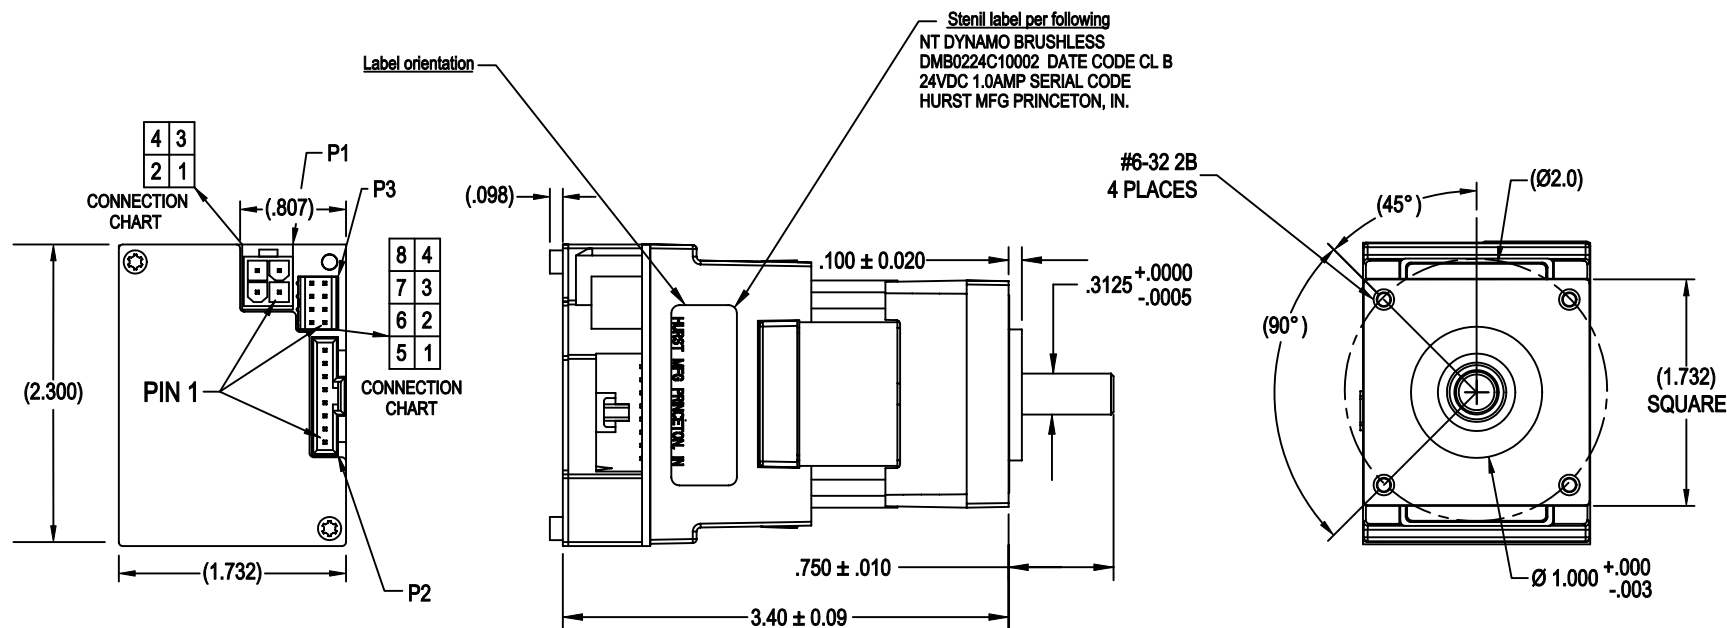

HALL CONNECTIONS (P2)				POWER CONNECTIONS (P1)	
PIN #	DESCRIPTION	PIN #	DESCRIPTION	PIN #	DESCRIPTION
1	Vs	5	HALL C	1	PHASE C
2	Vs (rtn)	6	BLANK	2	PHASE B
3	HALL B	7	BLANK	3	PHASE A
4	HALL A	8	BLANK	4	FRAME GRND.
ENCODER CONNECTIONS (P3)					
1	+5Vs	4	N/C	7	/B
2	A	5	5Vs (rtn)	8	N/C
3	B	6	/A		

POWER CONNECTION P1: (Molex # 39-29-3046 Mini-Fit Jr. 4 pin)

HALL CONNECTIONS P2: (Molex # 70543-0007 C-Grid SL Connector 8 pin)

ENCODER CONNECTIONS P3: (FCI Connect #69168-108 Vertical Latching System 8 Pin 4X2)

Copyright ©, Emerson Electric
Company, 1999

Confidential/ Proprietary/ Information
Emerson Electric Company
All Rights Reserved



Sample Motor Data Sheet

Date: 2/14/02

Customer	Microchip	Model Number	DMB0224C10002
		Serial #	12482

L-L Resistance (R_{lm}) Ohms :	4.03	Electrical Time Constant (t_e) mSec. :	1.14
L-L Inductance (L_{lm}) mH at 1Khz :	4.60	Mechanical Time Constant (t_m) mSec. :	3.74
Torque Constant (K_t) oz.in./Amp :	9.79	Thermal Resistance (R_{th}) °C/watt	4.78
Voltage Constant (K_e) V _{peak} /K _{RPM} :	7.24	Thermal Time Constant (t_{th}) min. :	16
Amb. Temp. (°C) :	22.7	Rotor Inertia (Jr) oz-in-s ² :	0.000628
		Stack Length:	0.75

Notes:


Speed / Torque Test Data -Control Input set at 100% duty cycle.

Load	Volts (DC)	Amps (DC)	Watts (DC)	Speed (RPM)	Torque (oz.in.)	Output (watts)	Output (HP)	Eff. (%)	
1	24.01	0.26	6.11	3125	0.54	1.25	0.002	20.4	
2	24.01	0.60	13.76	2683	4.00	7.94	0.011	57.7	
3	24.01	0.98	22.29	2248	8.02	13.34	0.018	59.9	
4	24.01	1.16	26.46	2054	10.00	15.20	0.020	57.4	Max Continuous Rating
5	24.02	1.74	39.56	1534	15.96	18.12	0.024	45.8	
6	24.02	2.15	49.16	1222	19.88	17.98	0.024	36.6	
7	24.03	2.59	59.55	913	23.94	16.18	0.022	27.2	
8	24.03	3.04	70.70	621	27.86	12.80	0.017	18.1	
9	24.04	3.51	82.69	319	31.98	7.55	0.010	9.1	
10	24.04	3.91	93.72	0	31.48	0.00	0.000	0.0	

Special Load Points

1									
2									

Sample Motor Test Data

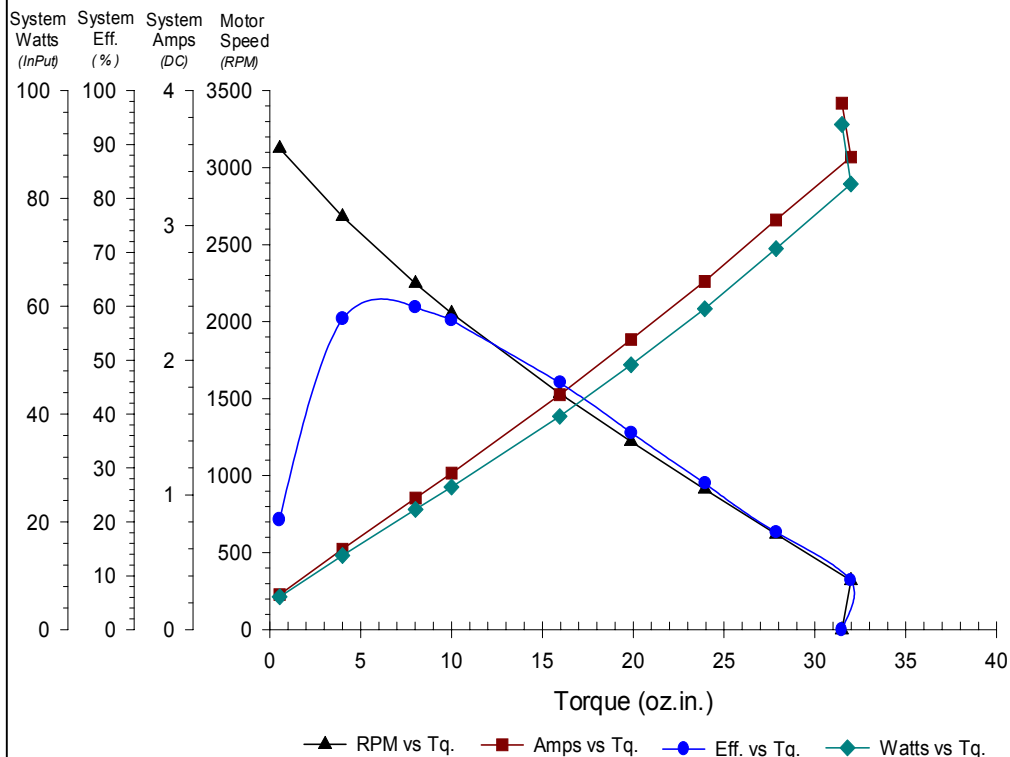

This motor is intended for sampling and customer approval only. No application fitness approval is implied, as that can only be determined by the customer. These data represent performance of a single sample motor. These values are not to be construed as guaranteed values.



EXTERNAL CONTROL MODULE DATA SHEET

Description: The External Control Module simplifies the connection of an external motor drive to the Dynamo motor by providing the user with a standard set of hall signals, numerous encoder options, and a high current connector for the motor phase windings. The module is compatible with external motor drives using a 10 to 48Vdc power supply. The External Control Module provides a standard system for rotor position sensing required by many brushless motor drives. Three hall sensors spaced 120 electrical degrees apart, sense a magnetic disk, which is synchronized to the rotor of the motor. The hall signals can be used to provide inexpensive speed feedback to the motor drive, or for more precise control a wide array of integral two channel quadrature encoder options are available. The quadrature nature of an encoder allows the user to determine the direction of motor rotation as well as speed.

Environment: The NT Dynamo uses a TENV(totally enclosed non-ventilated) non-gasket construction. Installation and operating conditions should not exceed the recommended values for humidity and temperature. Contact the Hurst engineering department regarding any special installation issues you may have regarding vapors, oils or dust.

Storage Temp.: 32-158°F (0-70°C) Humidity: 90% Max. Non-condensing Operating Temp.: 32-104°F (0-40°C)

Power: Power to the motor windings is via the four pin connector. A regulated DC supply must be provided for the encoder and hall devices. Observe the correct polarity when making these connections. For maximum flexibility and noise immunity, the hall and encoder power supplies are separated. Excessive amounts of voltage ripple can cause shortened product life.

Motor Windings:
Encoder:
Halls:


Minimum DC Voltage: 10Vdc
Minimum DC Voltage: 4.75Vdc
Minimum DC Voltage: 4.2Vdc

Maximum DC Voltage: 48Vdc
Maximum DC Voltage: 5.25Vdc
Maximum DC Voltage: 24Vdc


Connector	Pin #	Function	Mating Connector	Mating Terminal	Recommended Wire Size	Cable Length
Power	1	Phase C	Molex 39-01-2040	Molex 39-00-0039	22 AWG	30 ft. Max ¹
	2	Phase B				
	3	Phase A				
	4	Gnd				
Hall	1	V _s	Molex 50-57-9408	Molex 16-02-0103	22 AWG	30 ft. Max ¹
	2	V _{s(RTN)}				
	3	Hall S2				
	4	Hall S1				
	5	Hall S3				
	6	N/A				
	7	N/A				
	8	N/A				
Encoder	1	+5V _s	FCI 65846-016	FCI 48236-000	22 AWG	30 ft. Max ¹
	2	Encoder A				
	3	Encoder B				
	4	Encoder I				
	5	+5V _{s(RTN)}				
	6	Encoder /A				
	7	Encoder /B				
	8	Encoder /I				

Notes

- 1) Longer cable runs may require a larger wire size to maintain the correct input voltage level and a signal amplifier / conditioner to avoid erroneous signal values. For cable runs longer than 3 ft, shielded wire is recommended.

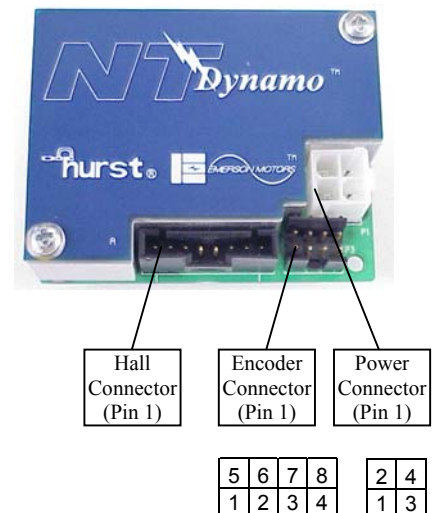

Commutation:

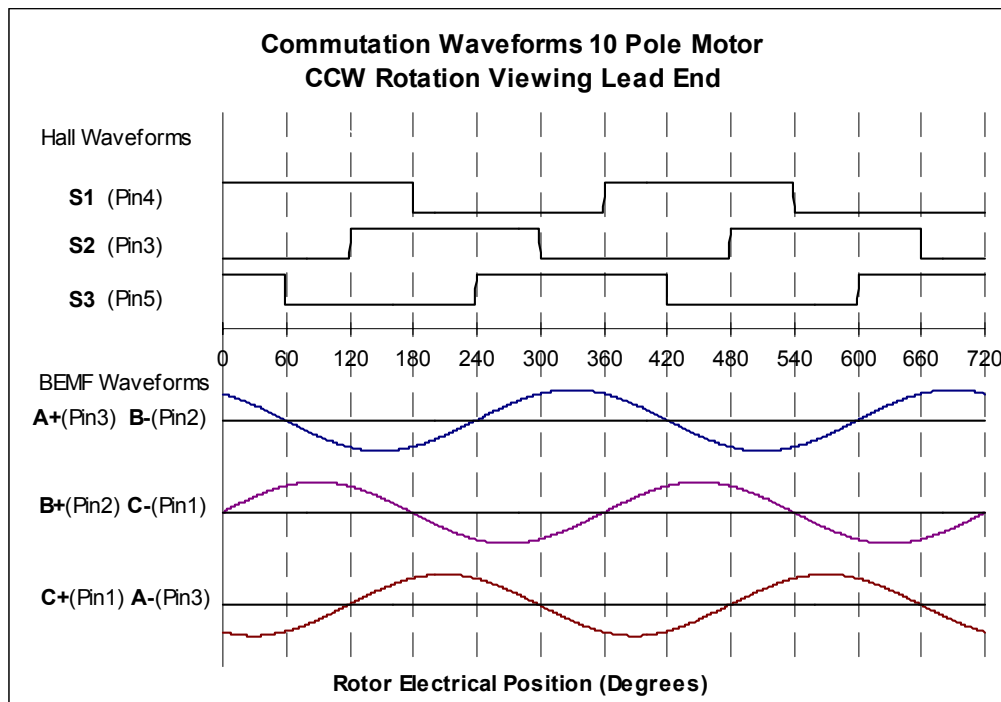

Encoder:

The drive may contain an optional shaft mounted optical encoder. The encoder outputs two or four quadrature signals from which direction and speed can be determined. These outputs can be used by an external drive to close the speed loop.

For More Information Visit The Website at www.hurstmfg.com or
Contact Hurst Engineering at 812-385-2564



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331