



RS-232/422/485 SWITCH
SELECTABLE EXPANSION
FOR ASYNCHRONOUS
CONNECTIVITY



PORTSERVER® TS MEI

Universal, high-performance RS-232/422/485 serial to Ethernet connectivity

PortServer TS MEI provides switch-selectable RS-232/422/485 serial port connectivity, making it easy to connect multiple serial devices to your network. It combines the inherent benefits of data networking with proven asynchronous connectivity to deliver powerful yet simple Ethernet connections for all of your serial devices.

Digi's patented RealPort®, with encryption and user authentication*, makes it possible to establish a connection between the host and networked serial device by creating a local COM or TTY port on the host computer, allowing software applications to work with networked device servers instead of requiring a host adapter.

Powerful features including data security via SSHv2, port buffering and full SNMP management, making PortServer TS MEI ideal for applications like console management where device management and monitoring are critical.

*The RealPort encryption feature is compatible with AIX, HP-UX, Solaris, Linux, Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012. The RealPort authentication feature is compatible only with Windows 2000, Windows XP, Windows 7, Windows 8, Windows 8.1, Windows 10, Windows Server 2003, Windows Server 2008 and Windows Server 2012.

BENEFITS

- 1, 2 or 4 switch-selectable RS-232/422/485 serial ports to connect virtually any type of serial device over Ethernet
- Ideal for applications requiring COM ports, serial tunneling, TCP/UDP sockets, or multiple unicast functionality
- Patented RealPort for COM/TTY port control and management
- Modem emulation
- Monitoring and diagnostic utility
- Secure communication via SSHv2
- Tunable for low latency or optimized for throughput
- Easy web-based configuration (HTTP/HTTPS)

RELATED PRODUCTS



PortServer®
TS




PortServer®
TS MEI
Hardened



PortServer®
TS M MEI




ConnectPort®
TS



Cables and
Accessories

APPLICATION EXAMPLE

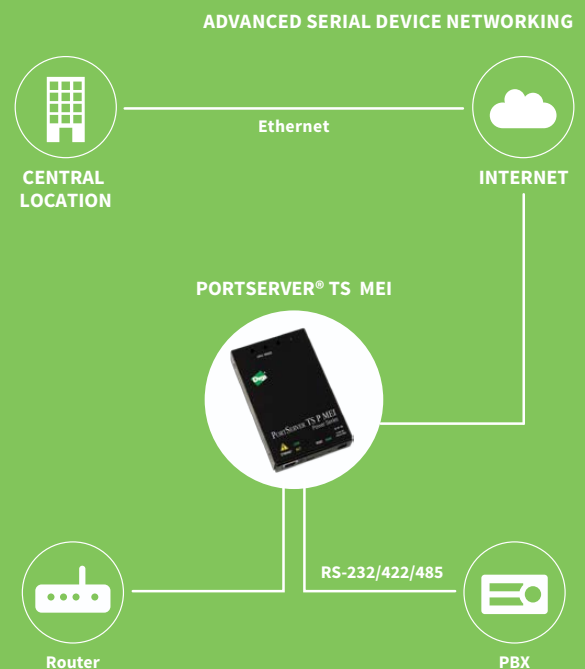

SPECIFICATIONS

PortServer® TS 1 MEI

PortServer® TS 2 MEI

PortServer® TS 4 MEI

FEATURES

MANAGEMENT	HTTP/HTTPS, CLI, SNMP (read/write), Digi Port Authority - Remote management diagnostics and auto-discovery tool
PROTOCOLS	UDP/TCP, DHCP/RARP/ARP-Ping for IP Address assignment, Extended Telnet RFC 2217, Telnet, PPP, Reverse Telnet, Modbus to Modbus/ TCP protocol conversion support, Reverse SSH
SOFTWARE	Supports Digi's Realport® COM port redirector
STATUS LEDS	Link, Activity, Power, Status
DIMENSIONS (L X W X D)	5.25 in x 3.33 in x 0.95 in (13.34 cm x 8.46 cm x 2.42 cm)
WEIGHT	2.25 oz (64.00 g)
SECURITY	SSHv2, SSL/TLS
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent
OTHER	Full modem and hardware flow control, Modem emulation, Port buffering, RJ45-DB-9F console adapter included for optional serial configuration

INTERFACES

SERIAL

PORTS	1 RS-232/422/485 RJ-45 (switch selectable); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	2 RS-232/422/485 RJ-45 (switch selectable); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD	4 RS-232/422/485 RJ-45 (switch selectable); Up to 230 Kbps throughput; Signal support for TXD, RXD, RTS, CTS, DTR, DSR, DCD
--------------	---	---	---

ETHERNET

PORTS	1 RJ-45 10/100 Mbps 10/100Base-T (auto-sensing); Full or half duplex
--------------	--

POWER REQUIREMENTS

POWER INPUT	9-30 VDC with locking barrel power connector
POWER SUPPLY (INCLUDED)	North America: 12 VDC/.5A max out; 120 VAC in (wall mount); International: 12 VDC/.5A max out; 100-240 VAC in (small brick)
POWER SUPPLY	12 VDC extended temperature power supply sold separately
POWER CONSUMPTION	Typical: 4 W; Max: 6 W
PRODUCT SURGE PROTECTION (ESD)	4 kV burst (EFT) per EN61000-4-4, 2 kV surge transient per EN61000-4-5


ENVIRONMENTAL

OPERATING TEMPERATURE	0° C to +60° C (32° F to 140° F)
STORAGE TEMPERATURE	-40° C to +85° C (-40° F to +185° F)
RELATIVE HUMIDITY	5% to 95% (non-condensing)
ETHERNET ISOLATION	1500 VAC min per IEEE802.3/ANSI X3.263
SERIAL PORT PROTECTION (ESD)	15 kV human body model


REGULATORY APPROVALS

SAFETY	UL/CUL 60950, IEC 60950 & CB
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), EN55024, EN55022 Class A, AS/NZS 3548, CISPR 22, VCCI V-3/99.05

PORTSERVER TS MEI FAMILY - FRONT

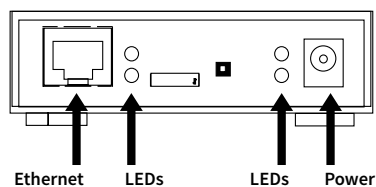

PORTSERVER TS MEI FAMILY - BACK

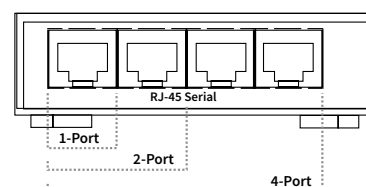

PART NUMBERS	DESCRIPTION
70001805	PortServer TS 1 MEI
70001806	PortServer TS 2 MEI
70001807	PortServer TS 4 MEI
70001832	PortServer TS 1 MEI (International)
70001833	PortServer TS 2 MEI (International)
70001834	PortServer TS 4 MEI (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001182
G1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331