

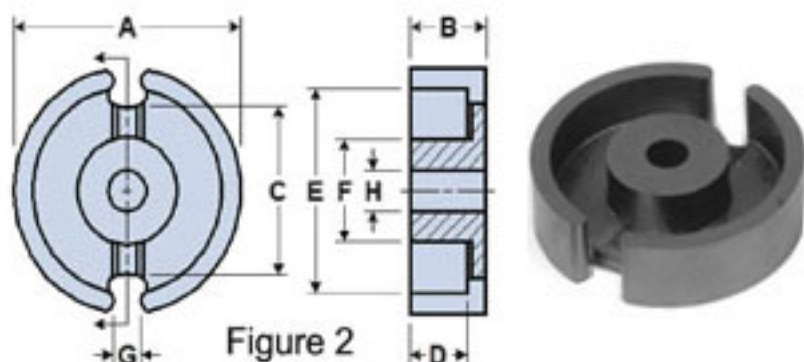


Figure 2

Part Number: 5678181221  
 Frequency Range: Dimensions  
 Description: 78 POT CORE  
 Application: Inductive Components  
 Where Used: Closed Magnetic Circuit  
 Part Type: Pot Cores  
 Generic Name: P18/11

## Mechanical Specifications

Weight: 6.000 (g) per Set

## Part Type Information

P9/5S, P11/7S, P14/8, P18/11, P22/13, P26/16, P30/19, P36/22

Pot cores have found application in all types of inductive devices. The core configuration provides a high degree of self-shielding. It also facilitates gapping to enhance utility for a variety of magnetic designs.

-Pot cores can be supplied with the center post gapped to a mechanical dimension or an AL value.

-AL value is measured at 1 kHz, B < 10 gauss.

-Weight indicated is per pair or set.

## Mechanical Specifications

| Dim | mm    | mm<br>tol | nominal<br>inch | inch<br>misc. |
|-----|-------|-----------|-----------------|---------------|
| A   | 18.00 | ±0.4      | 0.709           | -             |
| B   | 5.35  | ±0.15     | 0.211           | -             |
| C   | 13.40 | ±0.4      | 0.528           | -             |
| D   | 3.80  | ±0.2      | 0.150           | -             |
| E   | 14.90 | min       | 0.587           | min           |
| F   | 7.45  | ±0.15     | 0.293           | -             |
| G   | 4.00  | ±0.3      | 0.157           | -             |
| H   | 3.20  | ±0.2      | 0.126           | -             |
| J   | -     | -         | -               | -             |
| K   | -     | -         | -               | -             |

## Electrical Specifications

| Typical Impedance ( $\Omega$ ) |  |
|--------------------------------|--|
|                                |  |

| Electrical Properties            |           |
|----------------------------------|-----------|
| $A_L$ (nH)                       | 2600 ±25% |
| $A_e$ (cm <sup>2</sup> )         | 0.43000   |
| $\Sigma I/A$ (cm <sup>-1</sup> ) | 6.00      |
| $l_e$ (cm)                       | 2.59      |
| $V_e$ (cm <sup>3</sup> )         | 1.12000   |
| $A_{min}$ (cm <sup>2</sup> )     | .360      |

## Land Patterns

| V | W<br>ref | X | Y | Z |
|---|----------|---|---|---|
| - | -        | - | - | - |
| - | -        | - | - | - |

## Winding Information

| Turns  | Wire | 1st Wire | 2nd Wire |
|--------|------|----------|----------|
| Tested | Size | Length   | Length   |
| -      | -    | -        | -        |

## Reel Information

| Tape Width<br>mm | Pitch<br>mm | Parts 7 "<br>Reel | Parts 13 "<br>Reel | Parts 14 "<br>Reel |
|------------------|-------------|-------------------|--------------------|--------------------|
| -                | -           | -                 | -                  | -                  |

## Package Size

| Pkg Size |
|----------|
| -<br>(-) |

## Connector Plate

| # Holes | # Rows |
|---------|--------|
| -       | -      |

### Legend

+ Test frequency

Preferred parts, the suggested choice for new designs, have shorter lead times and are more readily available.

The column H(Oe) gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of H times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

A ½ turn is defined as a single pass through a hole.

$\Sigma I/A$  - Core Constant

$A_e$  - Effective Cross-Sectional Area

$A_L$  - Inductance Factor ( $\frac{L}{N^2}$ )

N/AWG - Number of Turns/Wire Size for Test Coil

$l_e$  - Effective Path Length

$V_e$  - Effective Core Volume

NI - Value of dc Ampere-turns



## Ferrite Material Constants

|                                       |                                        |
|---------------------------------------|----------------------------------------|
| Specific Heat .....                   | 0.25 cal/g/°C                          |
| Thermal Conductivity .....            | <b>3.5 - 4.5 mW/cm - °C</b>            |
| Coefficient of Linear Expansion ..... | 8 - 10x10 <sup>-6</sup> /°C            |
| Tensile Strength .....                | 4.9 kgf/mm <sup>2</sup>                |
| Compressive Strength .....            | 42 kgf/mm <sup>2</sup>                 |
| Young's Modulus .....                 | 15x10 <sup>3</sup> kgf/mm <sup>2</sup> |
| Hardness (Knoop) .....                | 650                                    |
| Specific Gravity .....                | ≈ 4.7 g/cm <sup>3</sup>                |

*The above quoted properties are typical for Fair-Rite MnZn and NiZn ferrites.*

See next page for further material specifications.




A MnZn ferrite specifically designed for power applications for frequencies up to 200 kHz.

RFID rods, toroids, U cores, and E&I cores are all available in 78 material.

## 78 Material Characteristics:


| Property                                                      | Unit             | Symbol              | Value           |
|---------------------------------------------------------------|------------------|---------------------|-----------------|
| Initial Permeability<br>@ B < 10 gauss                        |                  | $\mu_i$             | 2300            |
| Flux Density<br>@ Field Strength                              | gauss<br>oersted | B<br>H              | 4800<br>5       |
| Residual Flux Density                                         | gauss            | $B_r$               | 1500            |
| Coercive Force                                                | oersted          | $H_c$               | 0.20            |
| Loss Factor<br>@ Frequency                                    | $10^{-6}$<br>MHz | $\tan \delta \mu_i$ | 4.5<br>0.1      |
| Temperature Coefficient of<br>Initial Permeability (20 -70°C) | %/°C             |                     | 1.0             |
| Curie Temperature                                             | °C               | $T_c$               | >200            |
| Resistivity                                                   | $\Omega$ cm      | $\rho$              | $2 \times 10^2$ |

### Complex Permeability vs. Frequency

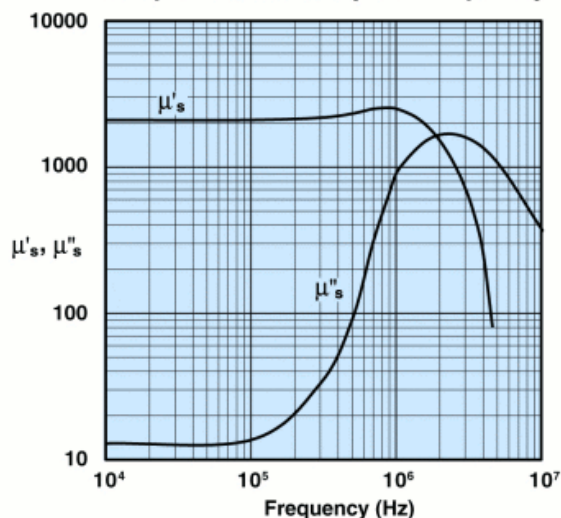


Measured on an 18/10/6mm toroid  
 using the HP 4284A and the HP 4291A.

### Incremental Permeability vs. H

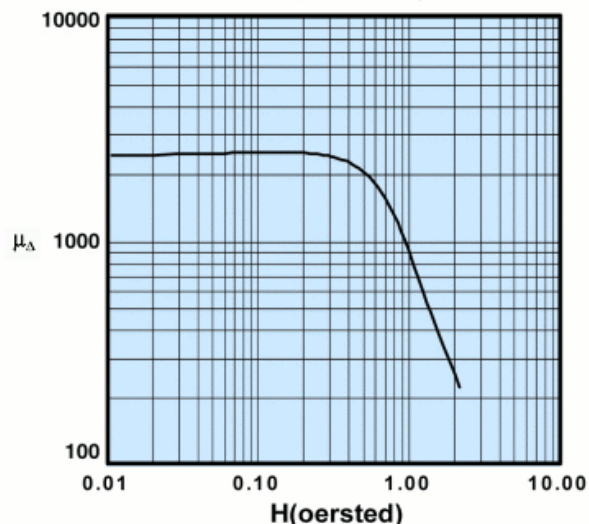


### Initial Permeability vs. Temperature

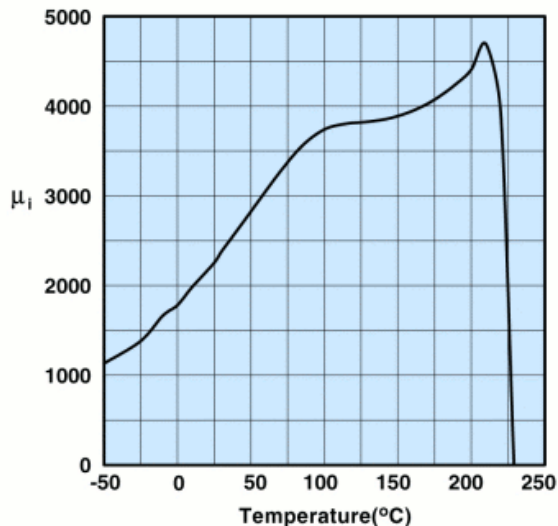

Measured on an 18/10/6mm toroid at 100kHz.

### Hysteresis Loop

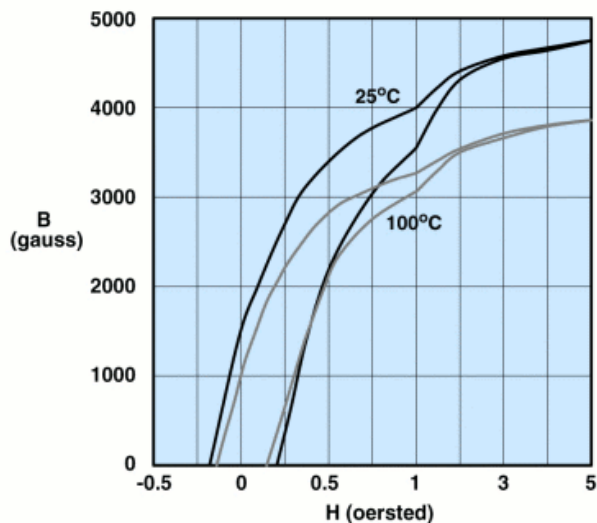

Measured on an 18/10/6mm toroid at 10kHz.



# Fair-Rite Products Corp. Your Signal Solution®

Ferrite Components for the Electronics Industry

Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

Fair-Rite Product's Catalog  
Part Data Sheet, 5678181221  
Printed: 2013-07-03



**RoHS**  
Material  
Declaration

## Amplitude Permeability vs. Flux Density



Measured on an 18/10/6mm toroid at 10kHz.

## Power Loss Density vs. Flux Density



Measured on an 18/10/6mm toroid using the  
Clarke Hess 258 VAW at 100°C

## Power Loss Density vs. Temperature



Measured on an 18/10/6mm toroid using the  
Clarke Hess 258 VAW.

## Flux Density vs. Temperature



Measured on an 18/10/6 mm toroid at 10kHz  
and H=5 oersted.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331