

### FEATURES

**Low supply current: 600  $\mu$ A maximum**

**OP07 type performance**

**Offset voltage: 20  $\mu$ V maximum**

**Offset voltage drift: 0.6  $\mu$ V/ $^{\circ}$ C maximum**

**Very low bias current**

**25 $^{\circ}$ C: 100 pA maximum**

**–55 $^{\circ}$ C to +125 $^{\circ}$ C: 250 pA maximum**

**High common-mode rejection: 114 dB minimum**

**Extended industrial temperature range: –40 $^{\circ}$ C to +85 $^{\circ}$ C**

### GENERAL DESCRIPTION

The OP97 is a low power alternative to the industry-standard OP07 precision amplifier. The OP97 maintains the standards of performance set by the OP07 while utilizing only 600  $\mu$ A supply current, less than 1/6 that of an OP07. Offset voltage is an ultralow 25  $\mu$ V, and drift over temperature is below 0.6  $\mu$ V/ $^{\circ}$ C. External offset trimming is not required in the majority of circuits.

Improvements have been made over OP07 specifications in several areas. Notable is bias current, which remains below 250 pA over the full military temperature range. The OP97 is ideal for use in precision long-term integrators or sample-and-hold circuits that must operate at elevated temperatures.

### PIN CONNECTIONS




Figure 1. 8-Lead PDIP (P Suffix)  
8-Lead SOIC (S Suffix)

Common-mode rejection and power supply rejection are also improved with the OP97, at 114 dB minimum over wider ranges of common-mode or supply voltage. Outstanding PSR, a supply range specified from  $\pm 2.25$  V to  $\pm 20$  V, and the minimal power requirements of the OP97 combine to make the OP97 a preferred device for portable and battery-powered instruments.

The OP97 conforms to the OP07 pinout, with the null potentiometer connected between Pin 1 and Pin 8 with the wiper to V+. The OP97 upgrades circuit designs using AD725, OP05, OP07, OP12, and PM1012 type amplifiers. It may replace 741-type amplifiers in circuits without nulling or where the nulling circuitry has been removed.

#### Rev. G

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                 |   |
|---------------------------------|---|
| Features .....                  | 1 |
| Pin Connections .....           | 1 |
| General Description .....       | 1 |
| Revision History .....          | 2 |
| Specifications.....             | 3 |
| Electrical Characteristics..... | 3 |
| Absolute Maximum Ratings.....   | 5 |
| Thermal Resistance .....        | 5 |

|                                           |    |
|-------------------------------------------|----|
| ESD Caution.....                          | 5  |
| Typical Performance Characteristics ..... | 6  |
| Application Information.....              | 11 |
| AC Performance .....                      | 12 |
| Guarding and Shielding.....               | 13 |
| Outline Dimensions .....                  | 15 |
| Ordering Guide .....                      | 16 |

## REVISION HISTORY

### 3/09—Rev. F to Rev. G

|                                         |    |
|-----------------------------------------|----|
| Changes to Figure 20 and Figure 23..... | 9  |
| Changes to Figure 26 and Figure 27..... | 10 |
| Updated Outline Dimensions .....        | 15 |
| Changes to Ordering Guide .....         | 16 |

### 11/07—Rev. E to Rev. F

|                                 |           |
|---------------------------------|-----------|
| Updated Format .....            | Universal |
| Changes to Ordering Guide ..... | 16        |

### 07/03—Rev. D to Rev. E

|                                  |           |
|----------------------------------|-----------|
| Deleted H-08A .....              | Universal |
| Deleted Q-8 .....                | Universal |
| Deleted E-20A .....              | Universal |
| Deleted Die Characteristics..... | 4         |
| Deleted Wafer Test Limits .....  | 4         |
| Updated TPC 14 .....             | 5         |
| Updated Outline Dimensions ..... | 10        |

### 01/02—Rev. C to Rev. D

|                                        |   |
|----------------------------------------|---|
| Edits to Absolute Maximum Ratings..... | 3 |
| Edits to Ordering Guide .....          | 3 |
| Deleted DICE Characteristics.....      | 3 |
| Deleted Wafer Test Limits .....        | 3 |
| Edits to Applications Information..... | 7 |

# SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS

$V_S = \pm 15\text{ V}$ ,  $V_{CM} = 0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 1.

| Parameter                                  | Symbol                 | Conditions                                    | OP97E |       |      | OP97F |       |      | Unit     |
|--------------------------------------------|------------------------|-----------------------------------------------|-------|-------|------|-------|-------|------|----------|
|                                            |                        |                                               | Min   | Typ   | Max  | Min   | Typ   | Max  |          |
| INPUT CHARACTERISTICS                      |                        |                                               |       |       |      |       |       |      |          |
| Input Offset Voltage                       | V <sub>OS</sub>        |                                               |       | 10    | 25   |       | 30    | 75   | μV       |
| Long-Term Offset Voltage Stability         | ΔV <sub>OS</sub> /Time |                                               |       | 0.3   |      |       | 0.3   |      | μV/month |
| Input Offset Current                       | I <sub>OS</sub>        |                                               |       | 30    | 100  |       | 30    | 150  | pA       |
| Input Bias Current                         | I <sub>B</sub>         |                                               |       | ±30   | ±100 |       | ±30   | ±150 | pA       |
| Input Noise Voltage                        | e <sub>n</sub> p-p     | 0.1 Hz to 10 Hz                               |       | 0.5   |      |       | 0.5   |      | μV p-p   |
| Input Noise Voltage Density                | e <sub>n</sub>         | f <sub>O</sub> = 10 Hz <sup>1</sup>           |       | 17    | 30   |       | 17    | 30   | nV/√Hz   |
|                                            |                        | f <sub>O</sub> = 1000 Hz <sup>2</sup>         |       | 14    | 22   |       | 14    | 22   | nV/√Hz   |
| Input Noise Current Density                | i <sub>n</sub>         | f <sub>O</sub> = 10 Hz                        |       | 20    |      |       | 20    |      | fA/√Hz   |
| Large Signal Voltage Gain                  | A <sub>VO</sub>        | V <sub>O</sub> = ±10 V; R <sub>L</sub> = 2 kΩ | 300   | 2000  |      | 200   | 2000  |      | V/mV     |
| Common-Mode Rejection                      | CMR                    | V <sub>CM</sub> = ±13.5 V                     | 114   | 132   |      | 110   | 132   |      | dB       |
| Input Voltage Range <sup>3</sup>           | IVR                    |                                               | ±13.5 | ±14.0 |      | ±13.5 | ±14.0 |      | V        |
| OUTPUT CHARACTERISTICS                     |                        |                                               |       |       |      |       |       |      |          |
| Output Voltage Swing                       | V <sub>O</sub>         | R <sub>L</sub> = 10 kΩ                        | ±13   | ±14   |      | ±13   | ±14   |      | V        |
| Differential Input Resistance <sup>4</sup> | R <sub>IN</sub>        |                                               | 30    |       |      | 30    |       |      | MΩ       |
| POWER SUPPLY                               |                        |                                               |       |       |      |       |       |      |          |
| Power Supply Rejection                     | PSR                    | V <sub>S</sub> = ±2 V to ±20 V                | 114   | 132   |      | 110   | 132   |      | dB       |
| Supply Current                             | I <sub>SY</sub>        |                                               |       | 380   | 600  |       | 380   | 600  | μA       |
| Supply Voltage                             | V <sub>S</sub>         | Operating range                               | ±2    | ±15   | ±20  | ±2    | ±15   | ±20  | V        |
| DYNAMIC PERFORMANCE                        |                        |                                               |       |       |      |       |       |      |          |
| Slew Rate                                  | SR                     |                                               | 0.1   | 0.2   |      | 0.1   | 0.2   |      | V/μs     |
| Closed-Loop Bandwidth                      | BW                     | A <sub>VCL</sub> = 1                          | 0.4   | 0.9   |      | 0.4   | 0.9   |      | MHz      |

<sup>1</sup> 10 Hz noise voltage density is sample tested. Devices 100% tested for noise are available on request.

<sup>2</sup> Sample tested.

<sup>3</sup> Guaranteed by CMR test.

<sup>4</sup> Guaranteed by design.

# OP97

$V_S = \pm 15\text{ V}$ ,  $V_{CM} = 0\text{ V}$ ,  $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$  for the OP97E/OP97F, unless otherwise noted.

**Table 2.**

| Parameter                                   | Symbol     | Conditions                                                                                                                      | OP97E      |            |           | OP97F      |            |           | Unit                         |
|---------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------|------------|------------|-----------|------------|------------|-----------|------------------------------|
|                                             |            |                                                                                                                                 | Min        | Typ        | Max       | Min        | Typ        | Max       |                              |
| Input Offset Voltage                        | $V_{OS}$   | S suffix                                                                                                                        |            | 25         | 60        |            | 60         | 200       | $\mu\text{V}$                |
| Average Temperature Coefficient of $V_{OS}$ | $TCV_{OS}$ |                                                                                                                                 |            | 0.2        | 0.6       |            | 0.3        | 2.0       | $\mu\text{V}/^\circ\text{C}$ |
| Input Offset Current                        | $I_{OS}$   |                                                                                                                                 |            | 60         | 250       |            | 80         | 750       | pA                           |
| Average Temperature Coefficient of $I_{OS}$ | $TCI_{OS}$ |                                                                                                                                 |            | 0.4        | 2.5       |            | 0.6        | 7.5       | $\text{pA}/^\circ\text{C}$   |
| Input Bias Current                          | $I_B$      |                                                                                                                                 |            | $\pm 60$   | $\pm 250$ |            | $\pm 80$   | $\pm 750$ | pA                           |
| Average Temperature Coefficient of $I_B$    | $TCI_B$    | $V_O = 10\text{ V}$ ; $R_L = 2\text{ k}\Omega$<br>$V_{CM} = \pm 13.5\text{ V}$<br>$V_S = \pm 2.5\text{ V}$ to $\pm 20\text{ V}$ |            | 0.4        | 2.5       |            | 0.6        | 7.5       | $\text{pA}/^\circ\text{C}$   |
| Large Signal Voltage Gain                   | $A_{VO}$   |                                                                                                                                 | 200        | 1000       |           | 150        | 1000       |           | V/mV                         |
| Common-Mode Rejection                       | CMR        |                                                                                                                                 | 108        | 128        |           | 108        | 128        |           | dB                           |
| Power Supply Rejection                      | PSR        |                                                                                                                                 | 108        | 126        |           | 108        | 128        |           | dB                           |
| Input Voltage Range <sup>1</sup>            | IVR        |                                                                                                                                 | $\pm 13.5$ | $\pm 14.0$ |           | $\pm 13.5$ | $\pm 14.0$ |           | V                            |
| Output Voltage Swing                        | $V_O$      | $R_L = 10\text{ k}\Omega$                                                                                                       | $\pm 13$   | $\pm 14$   |           | $\pm 13$   | $\pm 14$   |           | V                            |
| Slew Rate                                   | SR         |                                                                                                                                 | 0.05       | 0.15       |           | 0.05       | 0.15       |           | V/ $\mu\text{s}$             |
| Supply Current                              | $I_{SY}$   | Operating range                                                                                                                 |            | 400        | 800       |            | 400        | 800       | $\mu\text{A}$                |
| Supply Voltage                              | $V_S$      |                                                                                                                                 | $\pm 2.5$  | $\pm 15$   | $\pm 20$  | $\pm 2.5$  | $\pm 15$   | $\pm 20$  | V                            |

<sup>1</sup> Guaranteed by CMR test.

## ABSOLUTE MAXIMUM RATINGS

Absolute maximum ratings apply to both DICE and packaged parts, unless otherwise noted.

Table 3.

| Parameter                                          | Rating                                          |
|----------------------------------------------------|-------------------------------------------------|
| Supply Voltage                                     | $\pm 20$ V                                      |
| Input Voltage <sup>1</sup>                         | $\pm 20$ V                                      |
| Differential Input Voltage <sup>2</sup>            | $\pm 1$ V                                       |
| Differential Input Current <sup>2</sup>            | $\pm 10$ mA                                     |
| Output Short-Circuit Duration                      | Indefinite                                      |
| Operating Temperature Range<br>OP97E, OP97F (P, S) | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$  |
| Storage Temperature Range                          | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Junction Temperature Range                         | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Lead Temperature (Soldering, 60 sec)               | $300^{\circ}\text{C}$                           |

<sup>1</sup> For supply voltages less than  $\pm 20$  V, the absolute maximum input voltage is equal to the supply voltage.

<sup>2</sup> The inputs of the OP97 are protected by back-to-back diodes. Current-limiting resistors are not used in order to achieve low noise. Differential input voltages greater than 1 V cause excessive current to flow through the input protection diodes unless limiting resistance is used.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4.

| Package Type           | $\theta_{JA}$ <sup>1</sup> | $\theta_{JC}$ | Unit                        |
|------------------------|----------------------------|---------------|-----------------------------|
| 8-Lead PDIP (P Suffix) | 103                        | 43            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead SOIC (S Suffix) | 158                        | 43            | $^{\circ}\text{C}/\text{W}$ |

<sup>1</sup>  $\theta_{JA}$  is specified for worst-case mounting conditions, that is,  $\theta_{JA}$  is specified for device in socket for PDIP package;  $\theta_{JA}$  is specified for device soldered to printed circuit board for SOIC package.

## ESD CAUTION



### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

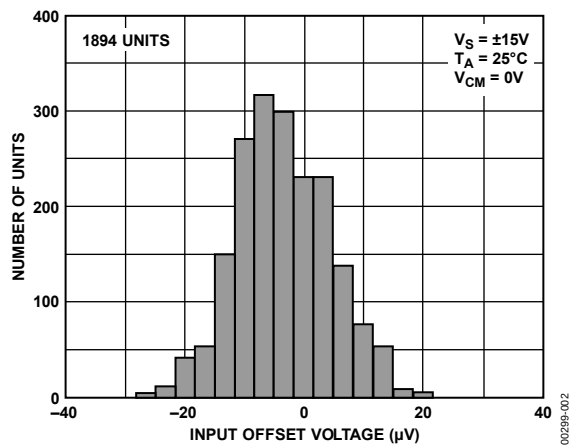


Figure 2. Typical Distribution of Input Offset Voltage

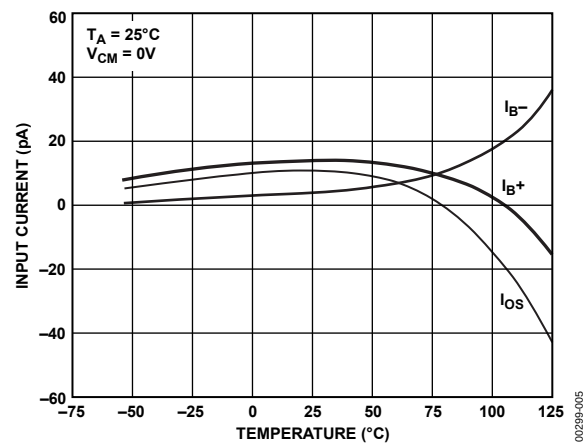


Figure 5. Input Bias, Offset Current vs. Temperature

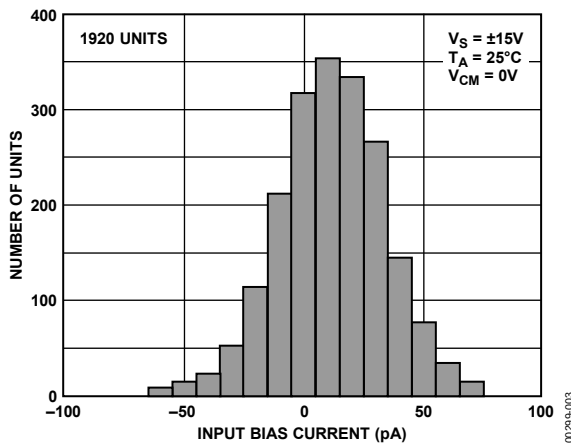


Figure 3. Typical Distribution of Input Bias Current

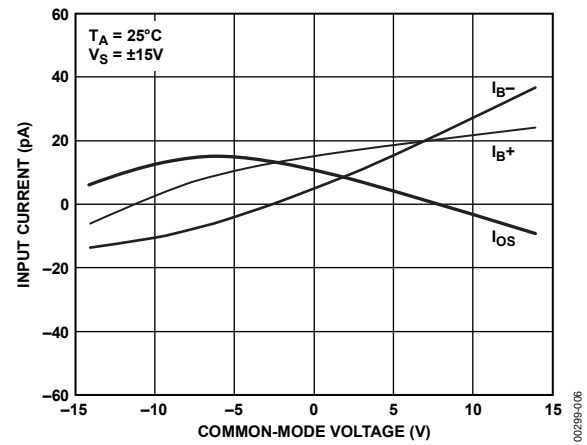


Figure 6. Input Bias, Offset Current vs. Common-Mode Voltage

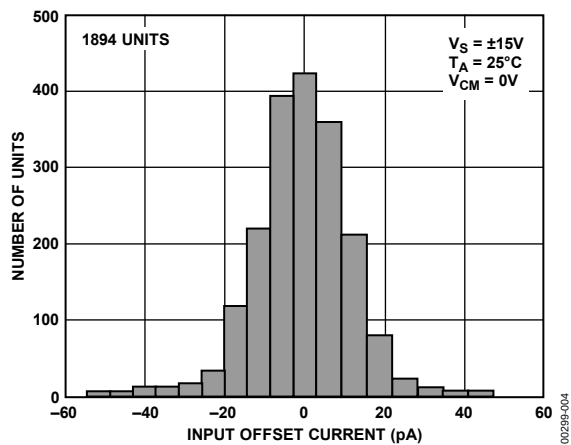


Figure 4. Typical Distribution of Input Offset Current

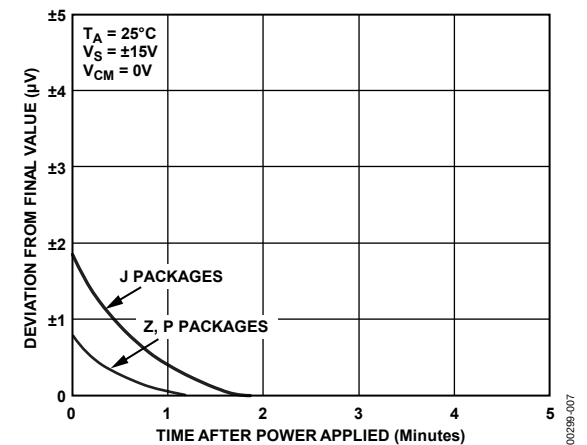


Figure 7. Input Offset Voltage Warmup Drift

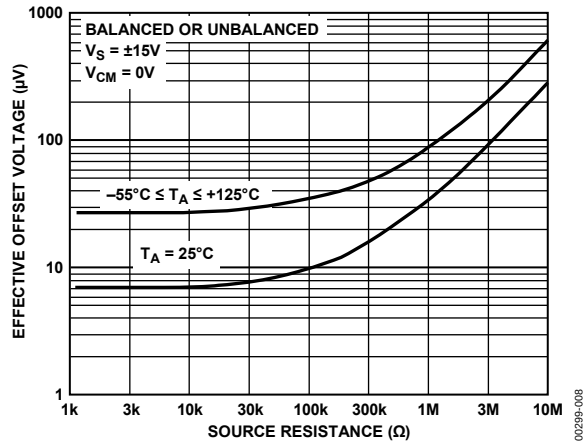


Figure 8. Effective Offset Voltage vs. Source Resistance

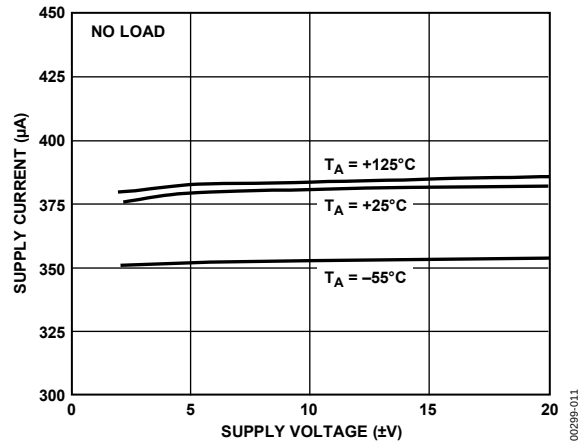


Figure 11. Supply Current vs. Supply Voltage

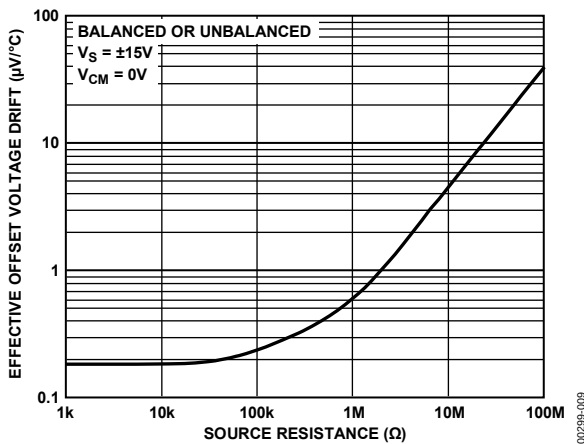


Figure 9. Effective  $TCV_{OS}$  vs. Source Resistance

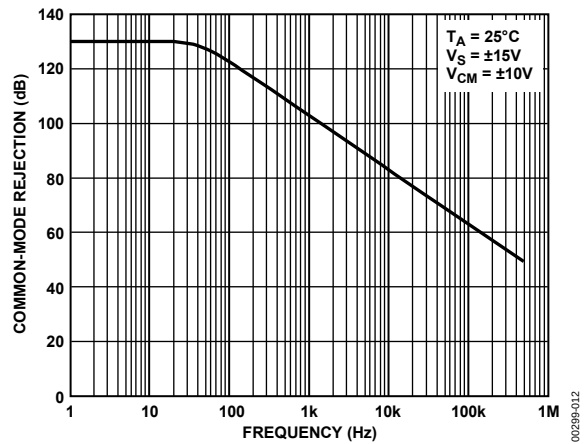


Figure 12. Common-Mode Rejection vs. Frequency

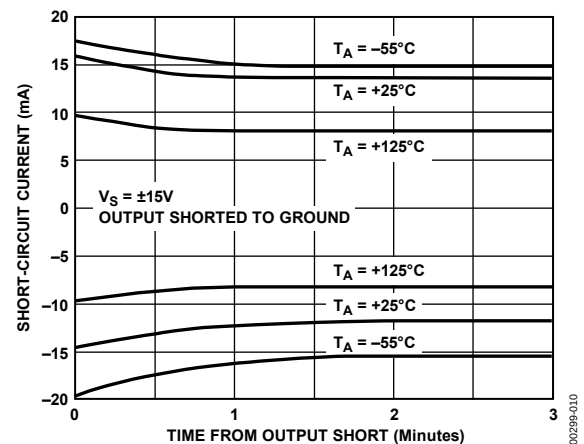


Figure 10. Short-Circuit Current vs. Time, Temperature

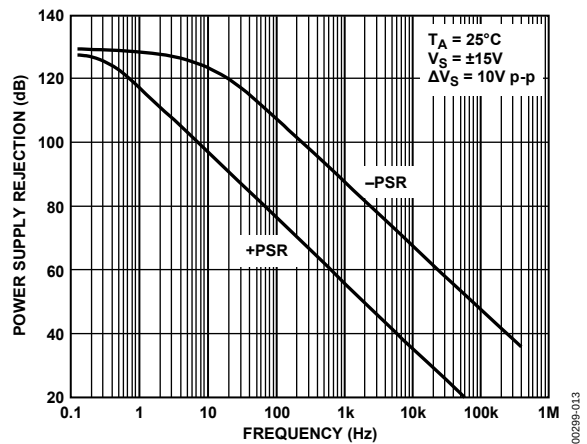


Figure 13. Power Supply Rejection vs. Frequency

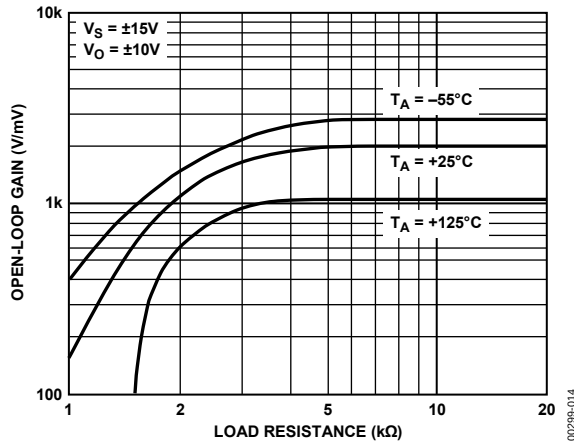


Figure 14. Open-Loop Gain vs. Load Resistance

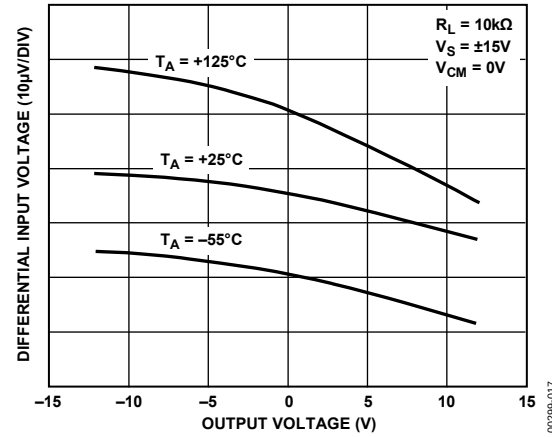


Figure 17. Open-Loop Gain Linearity

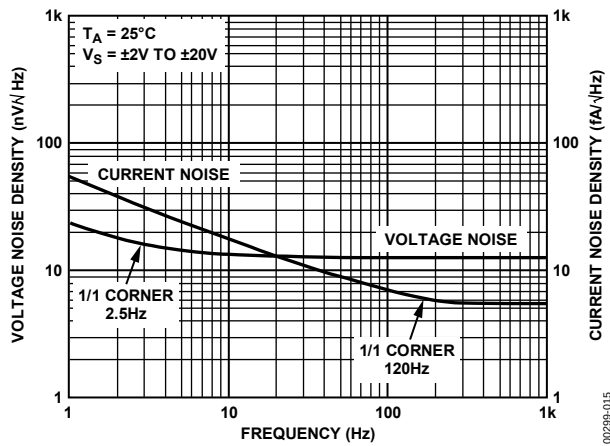


Figure 15. Noise Density vs. Frequency

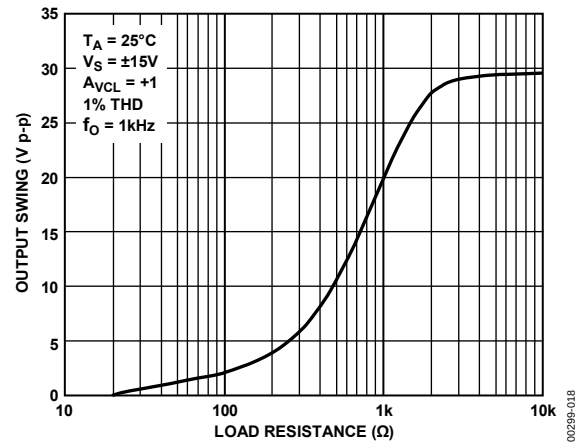


Figure 18. Maximum Output Swing vs. Load Resistance

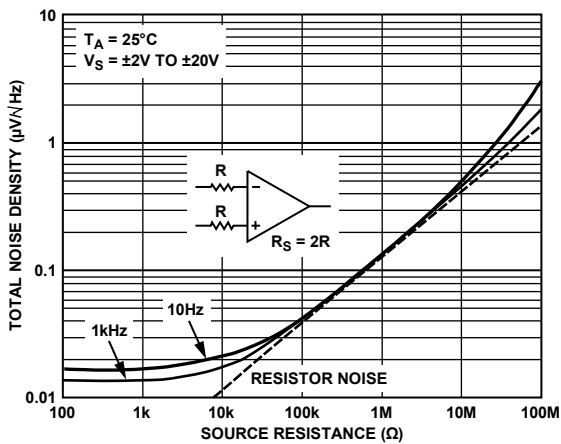


Figure 16. Total Noise Density vs. Source Resistance

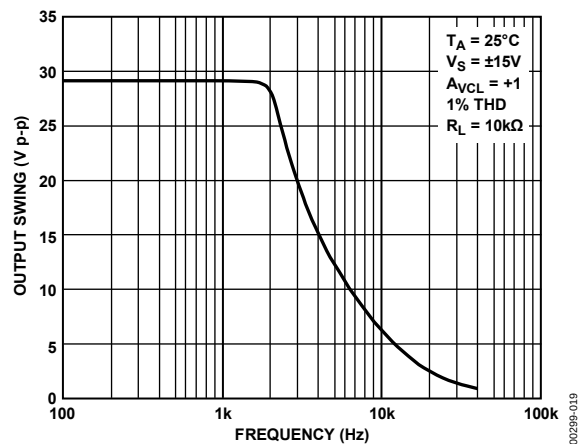


Figure 19. Maximum Output Swing vs. Frequency

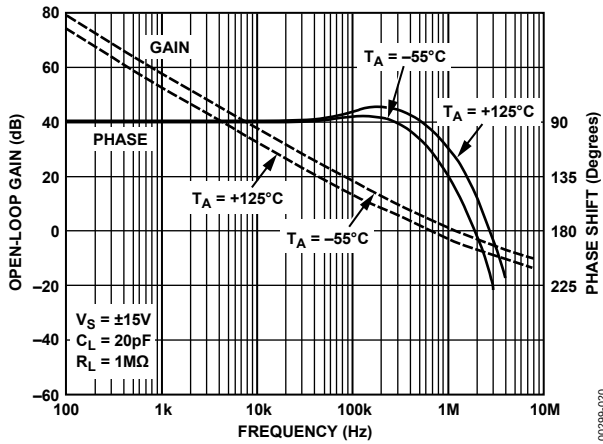


Figure 20. Open-Loop Gain, Phase vs. Frequency ( $C_{OC} = 0$  pF)

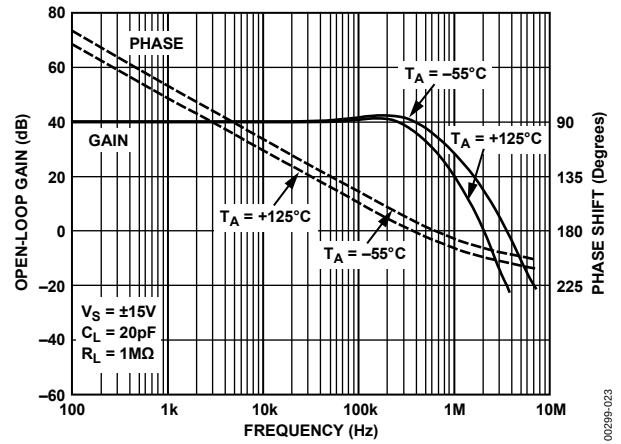


Figure 23. Open-Loop Gain, Phase vs. Frequency ( $C_{OC} = 100$  pF)

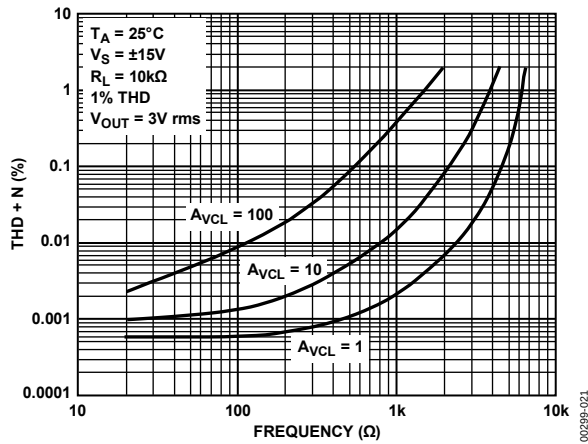


Figure 21. Total Harmonic Distortion Plus Noise vs. Frequency

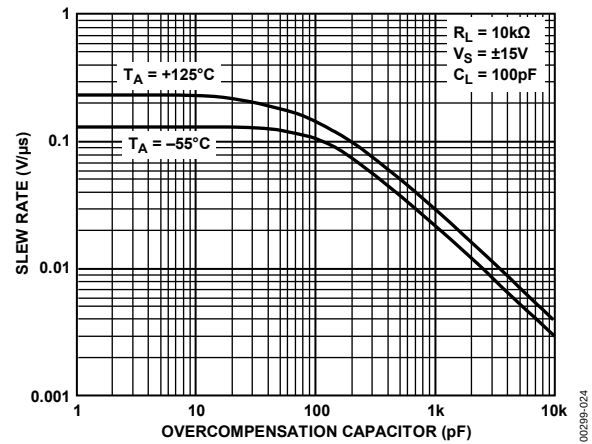


Figure 24. Slew Rate vs. Overcompensation

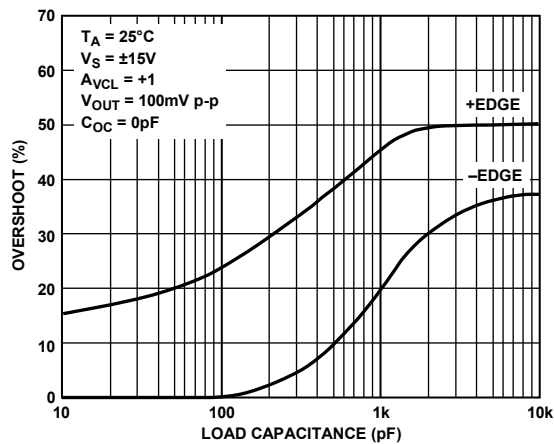


Figure 22. Small Signal Overshoot vs. Capacitive Load

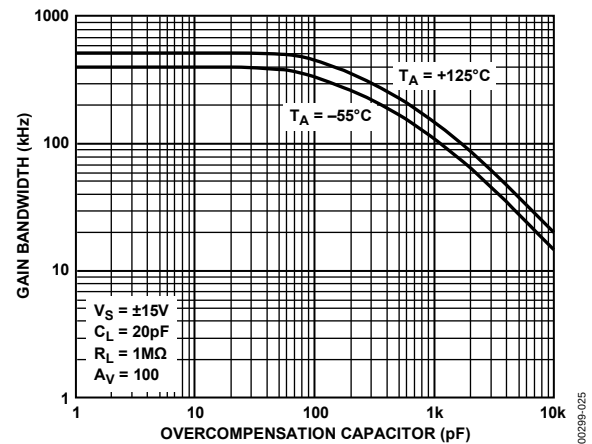


Figure 25. Gain Bandwidth Product vs. Overcompensation

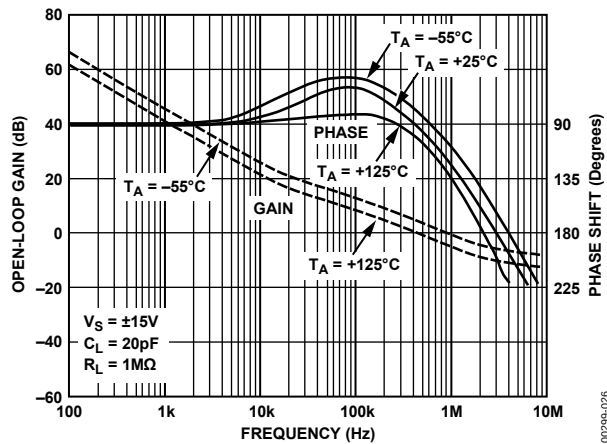


Figure 26. Open-Loop Gain, Phase vs. Frequency ( $C_{OC} = 1000 \text{ pF}$ )

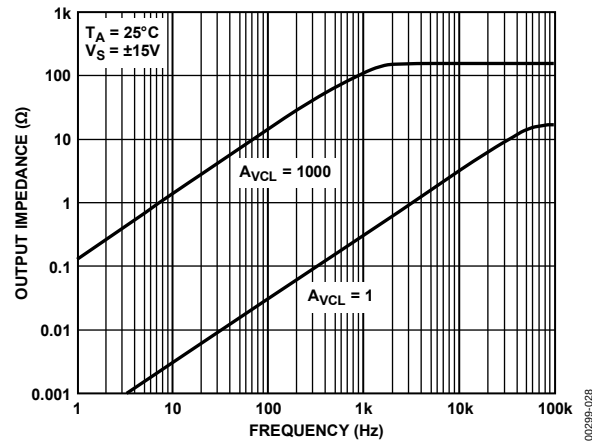


Figure 28. Closed-Loop Output Resistance vs. Frequency

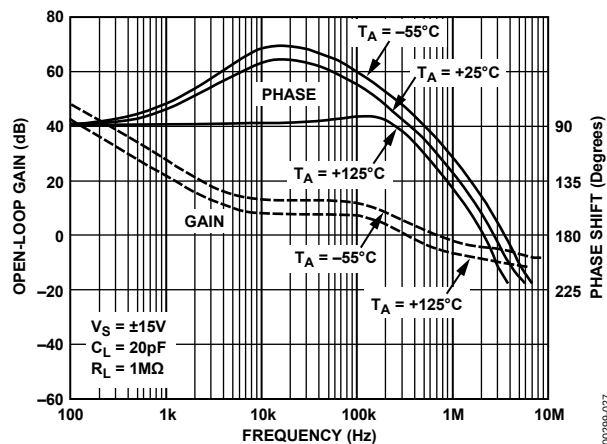


Figure 27. Open-Loop Gain, Phase vs. Frequency ( $C_{OC} = 10,000 \text{ pF}$ )

## APPLICATION INFORMATION

The OP97 is a low power alternative to the industry-standard precision op amp, the OP07. The OP97 can be substituted directly into OP07, OP77, AD725, and PM1012 sockets with improved performance and/or less power dissipation and can be inserted into sockets conforming to the 741 pinout if nulling circuitry is not used. Generally, nulling circuitry used with earlier generation amplifiers is rendered superfluous by the extremely low offset voltage of the OP97 and can be removed without compromising circuit performance.

Extremely low bias current over the full military temperature range makes the OP97 attractive for use in sample-and-hold amplifiers, peak detectors, and log amplifiers that must operate over a wide temperature range. Balancing input resistances is not necessary with the OP97. Offset voltage and  $TCV_{OS}$  are degraded only minimally by high source resistance, even when unbalanced.

The input pins of the OP97 are protected against large differential voltage by back-to-back diodes. Current-limiting resistors are not used to maintain low noise performance. If differential voltages above  $\pm 1$  V are expected at the inputs, series resistors must be used to limit the current flow to a maximum of 10 mA. Common-mode voltages at the inputs are not restricted and may vary over the full range of the supply voltages used.

The OP97 requires very little operating headroom about the supply rails and is specified for operation with supplies as low as  $\pm 2$  V. Typically, the common-mode range extends to within 1 V of either rail. The output typically swings to within 1 V of the rails when using a 10 k $\Omega$  load.

Offset nulling is achieved utilizing the same circuitry as an OP07. A potentiometer between 5 k $\Omega$  and 100 k $\Omega$  is connected between Pin 1 and Pin 8 with the wiper connected to the positive supply. The trim range is between 300  $\mu$ V and 850  $\mu$ V, depending upon the internal trimming of the device.

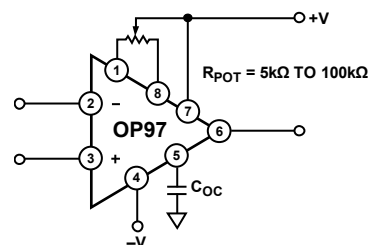


Figure 29. Optional Input Offset Voltage Nulling and Overcompensation Circuit

## AC PERFORMANCE

The ac characteristics of the OP97 are highly stable over its full operating temperature range. Unity-gain small-signal response is shown in Figure 30. Extremely tolerant of capacitive loading on the output, the OP97 displays excellent response even with 1000 pF loads (see Figure 31). In large signal applications, the input protection diodes effectively short the input to the output during the transients if the amplifier is connected in the usual unity-gain configuration. The output enters short-circuit current limit, with the flow going through the protection diodes. Improved large signal transient response is obtained by using a feedback resistor between the output and the inverting input. Figure 32 shows the large-signal response of the OP97 in unity-gain with a 10 k $\Omega$  feedback resistor. The unity-gain follower circuit is shown in Figure 33.

The overcompensation pin (Pin 5) can be used to increase the phase margin of the OP97 or to decrease gain bandwidth product at gains greater than 10.

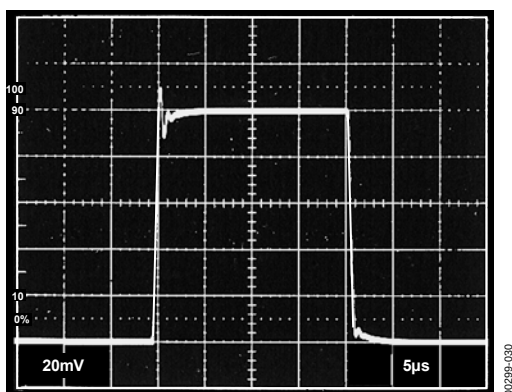


Figure 30. Small Signal Transient Response  
( $C_{LOAD} = 100 \text{ pF}$ ,  $A_{VCL} = 1$ )

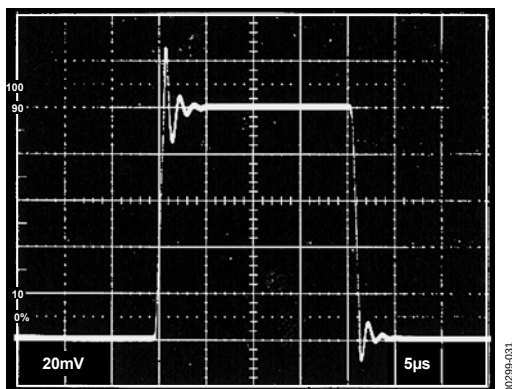


Figure 31. Small-Signal Transient Response  
( $C_{LOAD} = 1000 \text{ pF}$ ,  $A_{VCL} = 1$ )

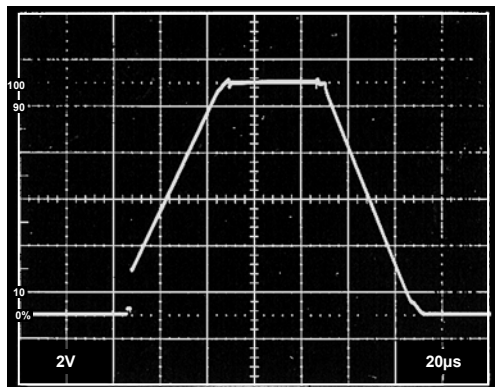


Figure 32. Large Signal Transient Response ( $A_{VCL} = 1$ )

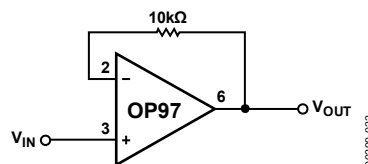


Figure 33. Unity-Gain Follower

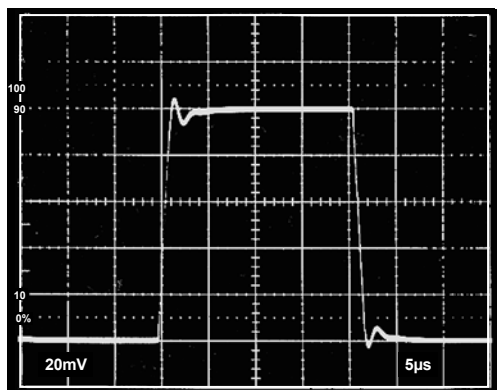


Figure 34. Small Signal Transient Response with Overcompensation  
( $C_{LOAD} = 1000 \text{ pF}$ ,  $A_{VCL} = 1$ ,  $C_{OC} = 220 \text{ pF}$ )

## GUARDING AND SHIELDING

To maintain the extremely high input impedances of the OP97, care must be taken in circuit board layout and manufacturing. Board surfaces must be kept scrupulously clean and free of moisture. Conformal coating is recommended to provide a humidity barrier. Even a clean PCB can have 100 pA of leakage currents between adjacent traces; therefore, use guard rings around the inputs. Guard traces are operated at a voltage close to that on the inputs, so that leakage currents are minimal. In noninverting applications, connect the guard ring to the common-mode voltage at the inverting input (Pin 2). In inverting applications, both inputs remain at ground, so that the guard trace should be grounded. Make guard traces on both sides of the circuit board.

High impedance circuitry is extremely susceptible to RF pickup, line frequency hum, and radiated noise from switching power supplies. Enclosing sensitive analog sections within grounded shields is generally necessary to prevent excessive noise pickup. Twisted-pair cable aid in rejection of line frequency hum.

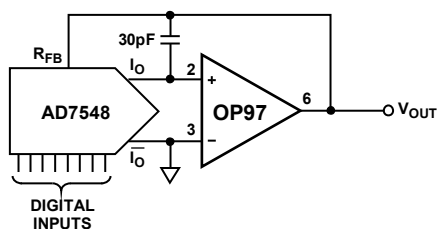


Figure 35. DAC Output Amplifier

The OP97 is an excellent choice as an output amplifier for higher resolution CMOS DACs. Its tightly trimmed offset voltage and minimal bias current result in virtually no degradation of linearity, even over wide temperature ranges.

Figure 36 shows a versatile monitor circuit that can typically sense current at any point between the  $\pm 15$  V supplies. This makes it ideal for sensing current in applications such as full bridge drivers where bidirectional current is associated with large common-mode voltage changes. The 114 dB CMRR of the OP97 makes the contribution of the amplifier to common-mode error negligible, leaving only the error due to the resistor ratio inequality. Ideally,  $R_2/R_4 = R_3/R_5$ .

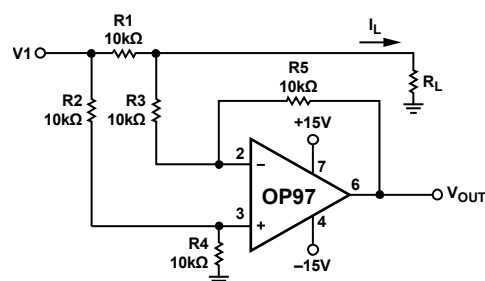


Figure 36. Current Monitor

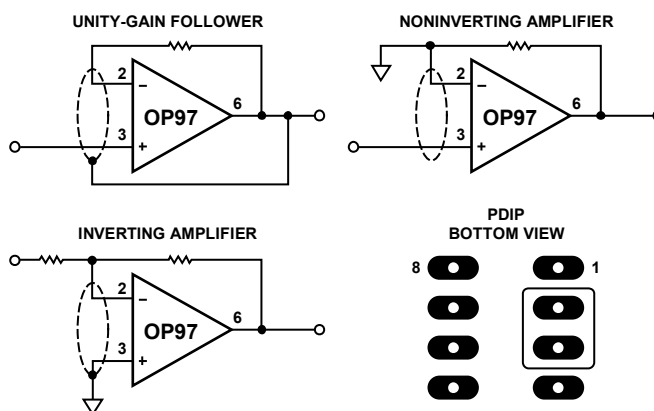


Figure 37. Guard Ring Layout and Connections

# OP97

The digitally programmable gain amplifier shown in Figure 38 has 12-bit gain resolution with 10-bit gain linearity over the range of -1 to -1024. The low bias current of the OP97 maintains this linearity, while C1 limits the noise voltage bandwidth, allowing accurate measurement down to microvolt levels.

Table 5.

| DIGITAL IN | GAIN ( $A_v$ ) |
|------------|----------------|
| 4095       | -1.00024       |
| 2048       | -2             |
| 1024       | -4             |
| 512        | -8             |
| 256        | -16            |
| 128        | -32            |
| 64         | -64            |
| 32         | -128           |
| 16         | -256           |
| 8          | -512           |
| 4          | -1024          |
| 2          | -2048          |
| 1          | -4096          |
| 0          | Open Loop      |

Many high speed amplifiers suffer from less-than-perfect low frequency performance. A combination amplifier consisting of a high precision, slow device like the OP97 and a faster device such as the AD8610 results in uniformly accurate performance from dc to the high frequency limit of the AD8610, which has a gain-bandwidth product of 25 MHz. The circuit shown in Figure 39 accomplishes this, with the AD8610 providing high frequency amplification and the OP97 operating on low frequency signals and providing offset correction. Offset voltage and drift of the circuit are controlled by the OP97.

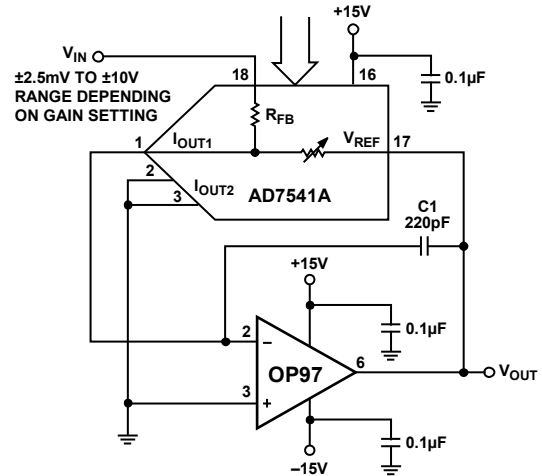


Figure 38. Precision Programmable Gain Amplifier

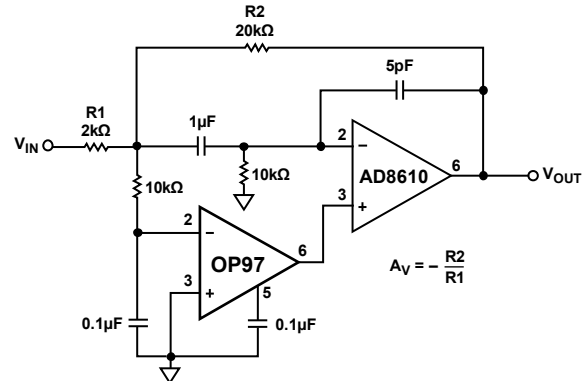


Figure 39. Combination High Speed, Precision Amplifier

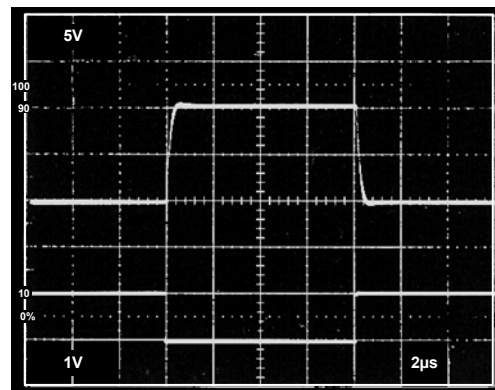


Figure 40. Combination Amplifier Transient Response



# OP97

## ORDERING GUIDE

| Model                      | Temperature Range | Package Description | Package Option |
|----------------------------|-------------------|---------------------|----------------|
| OP97EP                     | –40°C to +85°C    | 8-Lead PDIP         | N-8            |
| OP97EPZ <sup>1</sup>       | –40°C to +85°C    | 8-Lead PDIP         | N-8            |
| OP97FP                     | –40°C to +85°C    | 8-Lead PDIP         | N-8            |
| OP97FPZ <sup>1</sup>       | –40°C to +85°C    | 8-Lead PDIP         | N-8            |
| OP97FS                     | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |
| OP97FS-REEL                | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |
| OP97FS-REEL7               | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |
| OP97FSZ <sup>1</sup>       | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |
| OP97FSZ-REEL <sup>1</sup>  | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |
| OP97FSZ-REEL7 <sup>1</sup> | –40°C to +85°C    | 8-Lead SOIC_N       | R-8            |

<sup>1</sup> Z = RoHS Compliant Part.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331