



General Description

The SLG88103/4 is a wide voltage range, 375 nA Dual/Quad Channel CMOS Input Operational Amplifier capable of rail-to-rail input and output operation. Each Amplifier can be individually powered down.

Features

- Low Quiescent Current: 375 nA per Amplifier (typ)
- Low Offset Voltage: $\pm 200 \mu\text{V}$ (typ)
- Zero-Crossover
- Low Offset Drift: $1 \mu\text{V}/^\circ\text{C}$ (typ)
- DC Precision:
 - PSRR: 115 dB
 - CMRR: 100 dB
 - A_{OL} : 120 dB
- Gain-Bandwidth Product: 10 kHz (typ)
- Rail to Rail Input/Output
- Supply Voltage: 1.71 V to 5.5 V
- Tiny Package:
 - 10-pin 2 x 2 mm STDFN
 - 20-pin 2 x 3.5 mm STQFN
- Industrial Temperature Range: -40 °C to 85 °C

Typical Applications

- Battery-Powered Devices
- Portable Devices
- Wearable Products
- Gas Sensors
- Pressure Sensors
- Medical Monitors
- Smoke Detectors
- Active RFID Reader
- Energy Harvester

Pin Configurations

SLG88103

| | | | |
|------|---|----|------|
| PD1 | 1 | 10 | VDD |
| OUT1 | 2 | 9 | OUT2 |
| IN-1 | 3 | 8 | IN-2 |
| IN+1 | 4 | 7 | IN+2 |
| VSS | 5 | 6 | PD2 |


10-pin STDFN
(Top View)

SLG88104

| | | |
|------|-----|-----|
| PD1 | VDD | |
| OUT1 | 11 | 18 |
| IN-1 | 12 | 20 |
| IN+1 | 13 | 19 |
| VSS | 14 | 15 |
| PD2 | 15 | 14 |
| OUT2 | 16 | 13 |
| IN-2 | 17 | 9 |
| IN+2 | 18 | 10 |
| | 19 | 12 |
| | 20 | 11 |
| VSS | | PD3 |

20-pin STQFN
(Top View)

Example Application Circuit: Non-Inverting Amplifier + GreenPAK with Wake-Sleep Controller

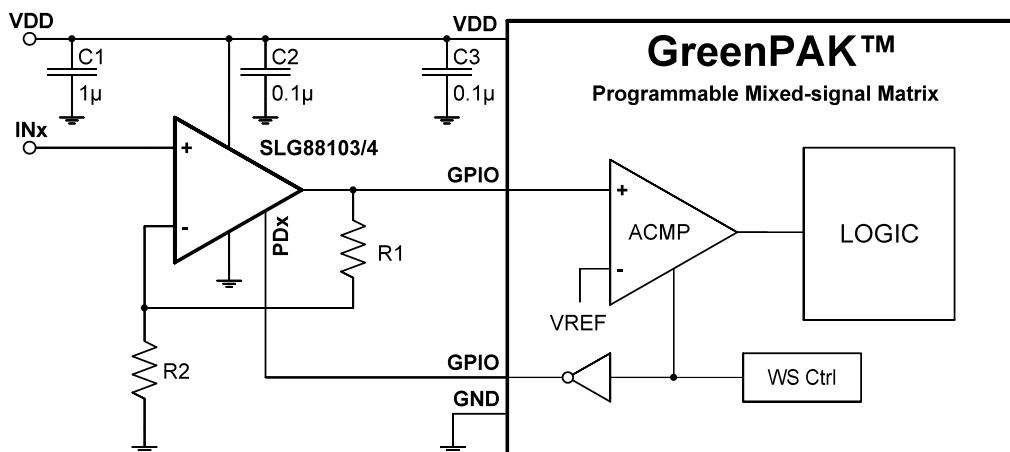

**SILEGO****SLG88103/4****Pin Description**

| Pin # | | Pin Name | Type | Pin Description |
|--------------|--------------|----------|------|---|
| 20L STQFN | 10L STDFN | | | |
| 1 | 2 | OUT1 | O | Analog Output (Op Amp 1) |
| 2 | 3 | IN-1 | I | Inverting Input (Op Amp 1) |
| 3 | 4 | IN+1 | I | Non-inverting Input (Op Amp 1) |
| 4 | 5 | VSS | GND | Negative Power Supply |
| 5 | 6 | PD2 | I | Power Down Input (Op Amp 2) When PD pin is high, the respective amplifier is powered down. |
| 6 | 9 | OUT2 | O | Analog Output (Op Amp 2) |
| 7 | 8 | IN-2 | I | Inverting Input (Op Amp 2) |
| 8 | 7 | IN+2 | I | Non-inverting Input (Op Amp 2) |
| 9 | -- | VSS | GND | Negative Power Supply |
| 10 | -- | PD3 | I | Power Down Input (Op Amp 3) When PD pin is high, the respective amplifier is powered down. |
| 11 | -- | IN+3 | I | Non-inverting Input (Op Amp 3) |
| 12 | -- | IN-3 | I | Inverting Input (Op Amp 3) |
| 13 | -- | OUT3 | O | Analog Output (Op Amp 3) |
| 14 | 10 | VDD | PWR | Power Supply |
| 15 | -- | PD4 | I | Power Down Input (Op Amp 4) When PD pin is high, the respective amplifier is powered down. |
| 16 | -- | IN+4 | I | Non-inverting Input (Op Amp 4) |
| 17 | -- | IN-4 | I | Inverting Input (Op Amp 4) |
| 18 | -- | OUT4 | O | Analog Output (Op Amp 4) |
| 19 | -- | VDD | PWR | Power Supply |
| 20 | 1 | PD1 | I | Power Down Input (Op Amp 1) When PD pin is high, the respective amplifier is powered down. |

Ordering Information

| Part Number | Type | Production Flow |
|-------------|------------------------------|-----------------------------|
| SLG88103V | 10-pin STDFN | Industrial, -40 °C to 85 °C |
| SLG88103VTR | 10-pin STDFN (Tape and Reel) | Industrial, -40 °C to 85 °C |
| SLG88104V | 20-pin STQFN | Industrial, -40 °C to 85 °C |
| SLG88104VTR | 20-pin STQFN (Tape and Reel) | Industrial, -40 °C to 85 °C |



SILEGO

SLG88103/4

Absolute Maximum Ratings

| Parameter | Description | Min. | Typ. | Max. | Unit |
|---------------|---------------------------------------|------|------|------|------|
| V_{DD} | Voltage on VDD pin relative to GND | -0.3 | -- | 6.0 | V |
| T_A | Operating Range | -40 | -- | 85 | °C |
| θ_{JA} | Thermal Resistance | -- | 80 | -- | °C/W |
| T_S | Storage Temperature | -65 | -- | 150 | °C |
| T_J | Junction Temperature | -- | -- | 150 | °C |
| ESD_{HBM} | ESD Protection (Human Body Model) | 2000 | -- | -- | V |
| ESD_{CDM} | ESD Protection (Charged Device Model) | 500 | -- | -- | V |
| MSL | Moisture Sensitivity Level | | 1 | | |

Note: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrical Characteristics

$T_A = 25^\circ\text{C}$, $V_{DD} = 1.71\text{ V}$ to 5.5 V , $V_{SS} = \text{GND}$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1\text{ M}\Omega$ to V_L , unless otherwise stated.

| Symbol | Description | Conditions | Min | Typ | Max | Unit |
|-----------------------|-------------------------------|--|-------|-----------|------|------------------------------|
| Input Offset | | | | | | |
| V_{OS} | Input Offset Voltage | $V_{CM} = V_{DD}/2$ | -1000 | ± 200 | 1000 | μV |
| | | $V_{CM} = V_{DD}/2$; $T_A = -40^\circ\text{C}$ to 85°C | -1100 | ± 250 | 1100 | μV |
| | | $V_{CM} = V_{SS}$; $T_A = -40^\circ\text{C}$ to 85°C | -2400 | ± 350 | 2400 | μV |
| dV_{OS}/dT | Offset Drift with Temperature | $V_{CM} = V_{DD}/2$; $T_A = -40^\circ\text{C}$ to 85°C | -4 | ± 1 | 4 | $\mu\text{V}/^\circ\text{C}$ |
| | | $V_{CM} = V_{SS}$; $T_A = -40^\circ\text{C}$ to 85°C | -10 | ± 2 | 10 | $\mu\text{V}/^\circ\text{C}$ |
| dV_{OS}/Time | 10 Year Offset Drift | $T_A = 85^\circ\text{C}$; $V_{DD} = 3.3\text{ V}$ | -30 | -- | +30 | μV |
| | | $T_A = 85^\circ\text{C}$; $V_{DD} = 5.0\text{ V}$ | -40 | -- | +40 | μV |
| PSRR | Power Supply Rejection Ratio | $V_{CM} = V_{DD}/2$ $T_A = -40^\circ\text{C}$ to 85°C | 95 | 115 | -- | dB |
| | | $V_{CM} = V_{SS}$ $T_A = -40^\circ\text{C}$ to 85°C | 85 | 100 | -- | dB |
| CS | Channel Separation | $V_{DD} = 5\text{ V}$, $f = 10\text{ Hz}$ | -- | 120 | -- | dB |
| | | $V_{DD} = 5\text{ V}$, $f = 1\text{ kHz}$ | -- | 95 | -- | dB |

Input Voltage Range

| | | | | | | |
|-----------|---------------------------------|---|----------|-----|----------|----|
| V_{CMR} | Input Common-Mode Voltage Range | $T_A = -40^\circ\text{C}$ to 85°C | V_{SS} | - | V_{DD} | V |
| CMRR | Common-Mode Rejection Ratio | $V_{SS} + 0.8\text{ V} < V_{CM} < V_{DD} - 0.8\text{ V}$, $T_A = -40^\circ\text{C}$ to 85°C | 65 | 100 | -- | dB |
| | | $V_{SS} < V_{CM} < V_{SS} + 0.8\text{ V}$, $V_{DD} - 0.8\text{ V} < V_{CM} < V_{DD}$, $T_A = -40^\circ\text{C}$ to 85°C | 50 | 75 | -- | dB |

Input Bias Current and Impedance

| | | | | | | |
|-------|---------------------------------|--------------------------|----|-----|-----|----|
| I_B | Input Bias Current ¹ | -- | 2 | -- | pA | |
| | | $T_A = 85^\circ\text{C}$ | -- | 320 | 500 | pA |



SILEGO

SLG88103/4

Electrical Characteristics (continued) $T_A = 25^\circ\text{C}$, $V_{DD} = 1.71\text{ V}$ to 5.5 V , $V_{SS} = \text{GND}$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1\text{ M}\Omega$ to V_L , unless otherwise stated.

| Symbol | Description | Conditions | Min | Typ | Max | Unit |
|--|-----------------------------------|---|--------------------------------|-----------|----------------|------------------------------|
| I_{OS} | Input Offset Current ² | | -- | ± 0.3 | -- | pA |
| | | $T_A = 85^\circ\text{C}$ | -- | ± 20 | -- | pA |
| R_{CM} | Common Mode Input Resistance | | -- | 10^{13} | -- | Ω |
| R_{DIFF} | Differential Input Resistance | | -- | 10^{13} | -- | Ω |
| C_{CM} | Input Capacitance Common-Mode | | -- | 4.3 | -- | pF |
| C_{DIFF} | Input Capacitance Differential | | -- | 6 | -- | pF |
| Open-Loop Gain | | | | | | |
| A_{OL} | DC Open Loop Voltage Gain | $R_L = 1\text{ M}\Omega$; $V_{SS} + 0.1\text{ V} \leq V_{OUT} \leq V_{DD} - 0.1\text{ V}$ | 100 | 120 | -- | dB |
| | | $R_L = 50\text{ k}\Omega$; $V_{SS} + 0.5\text{ V} \leq V_{OUT} \leq V_{DD} - 0.5\text{ V}$ | 100 | 120 | -- | dB |
| | | $R_L = 50\text{ k}\Omega$; $T_A = 85^\circ\text{C}$; $V_{SS} + 0.1\text{ V} \leq V_{OUT} \leq V_{DD} - 0.1\text{ V}$ | 80 | 100 | -- | dB |
| Output | | | | | | |
| V_{OH}, V_{OL} | Maximum Voltage Swing | $R_L = 50\text{ k}\Omega$ | $V_{SS} + 5$ | -- | $V_{DD} - 5$ | mV |
| V_{OSR} | Linear Output Swing Range | V_{OVR} from Rail | $V_{SS} + 100$ | -- | $V_{DD} - 100$ | mV |
| I_{SC} | Short-circuit Current | $V_{DD} = 1.71\text{ V}$ | 3.8 | 4.5 | -- | mA |
| | | $V_{DD} = 3.0\text{ V}$ to 5.5 V | 8.5 | 10 | -- | mA |
| C_{LOAD} | Capacitive Load Drive | | See Typical Performance Charts | | | |
| Power Supply | | | | | | |
| V_{DD} | Supply Voltage | Guaranteed by PSRR Test | 1.71 | -- | 5.5 | V |
| I_Q | Quiescent Current (Per Amplifier) | | -- | 0.38 | 0.55 | μA |
| | | $T_A = -40^\circ\text{C}$ to 85°C | -- | 0.4 | 0.8 | μA |
| | | $PDX = V_{DD}$ | -- | 1 | -- | nA |
| Frequency Response | | | | | | |
| GBW | Gain Bandwidth Product | $G = +1\text{ V/V}$ | -- | 10 | -- | kHz |
| PM | Phase Margin | $G = +1\text{ V/V}$ | -- | 54 | -- | ° |
| SR | Slew Rate | $R_L = 50\text{ k}\Omega$ | 2.4 | 5.0 | -- | V/ms |
| t_{OR} | Overload Recovery Time | $T_A = -40^\circ\text{C}$ to 85°C ; $R_L = 50\text{ k}\Omega$ | -- | 350 | -- | μs |
| Noise | | | | | | |
| e_n | Input Voltage Noise | $f = 0.1$ to 10 Hz | -- | 6.5 | -- | μV_{P-P} |
| V_n | Input Voltage Noise Density | $f = 1\text{ kHz}$ | -- | 195 | -- | $\text{nV}/\sqrt{\text{Hz}}$ |
| I_n | Input Current Noise Density | $f = 1\text{ kHz}$ | -- | < 10 | -- | $\text{fA}/\sqrt{\text{Hz}}$ |
| Note: | | | | | | |
| 1. Part is measured to be less than $1\text{ }\mu\text{A}$ during production test. 2. Guaranteed by design, not tested in production. | | | | | | |



SILEGO

SLG88103/4

Typical Performance Charts

$T_A = 25^\circ\text{C}$, $V_{DD} = 5.0\text{ V}$, $V_{SS} = \text{GND}$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1\text{ M}\Omega$ to V_L , $C_L = 80\text{ pF}$, unless otherwise stated.

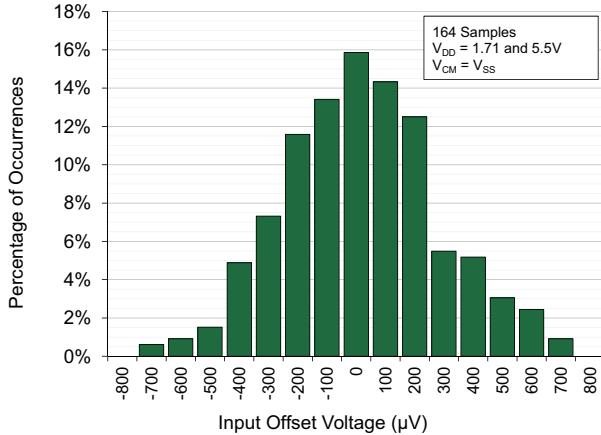


Fig 1. Input Offset Voltage Drift Distribution
 $V_{CM} = V_{SS}$; $V_{DD} = 1.71\text{ V}$ and 5.5 V ; $T_A = 25^\circ\text{C}$.

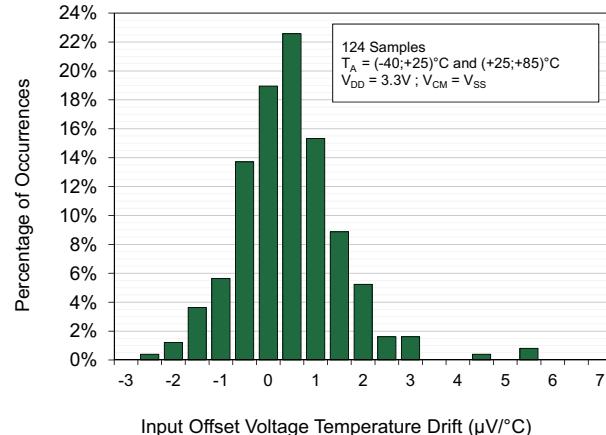


Fig 4. Input Offset Voltage Temperature Drift Distribution
 $V_{CM} = V_{SS}$; $V_{DD} = 3.3\text{ V}$; $T_A = -40^\circ\text{C}$ to 85°C .

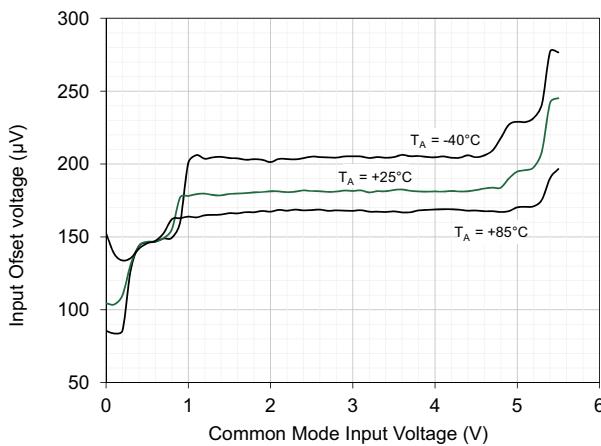


Fig 2. Input Offset Voltage vs. Common Mode Input Voltage
 $V_{DD} = 5.5\text{ V}$.

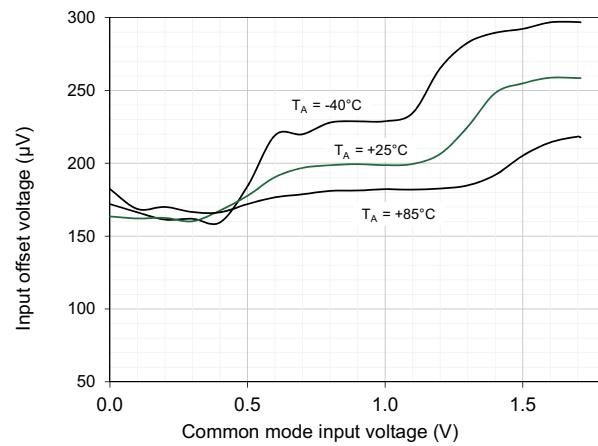


Fig 5. Input Offset Voltage vs. Common Mode Input Voltage
 $V_{DD} = 1.71\text{ V}$.

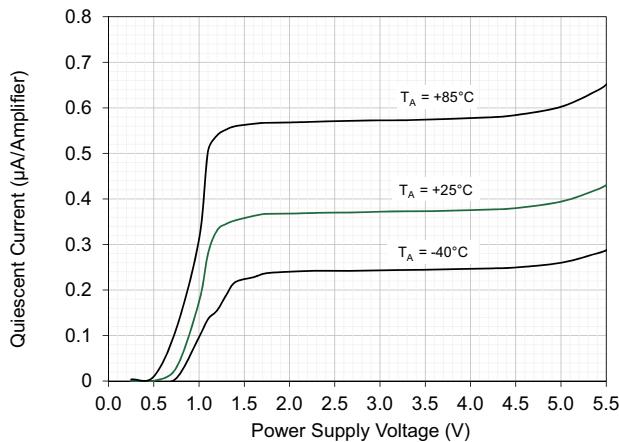


Fig 3. Quiescent Current vs. Power Supply Voltage

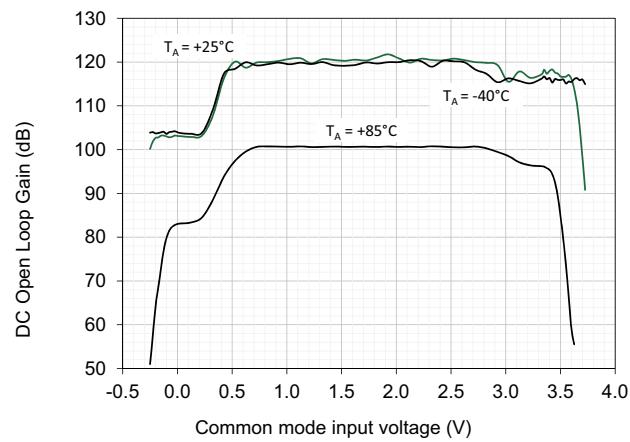


Fig 6. DC Open Loop Gain vs. Common Mode Input Voltage
 $V_{DD} = 3.3\text{ V}$.



SILEGO

SLG88103/4

$T_A = 25^\circ C$, $V_{DD} = 5.0 V$, $V_{SS} = GND$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1 M\Omega$ to V_L , $C_L = 80 pF$, unless otherwise stated.

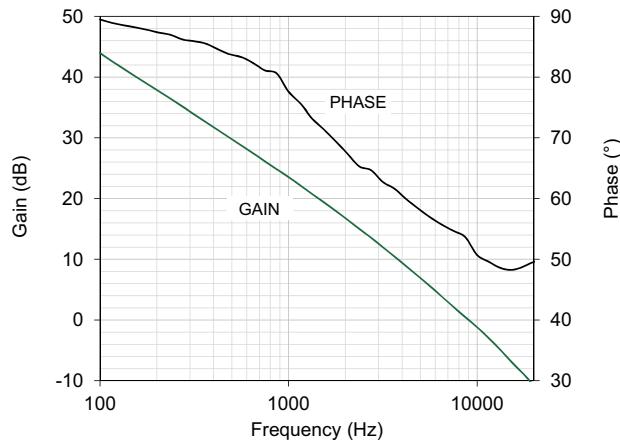


Fig 7. Open Loop Gain and Phase vs. Frequency
 $V_{DD} = 3.3 V$.

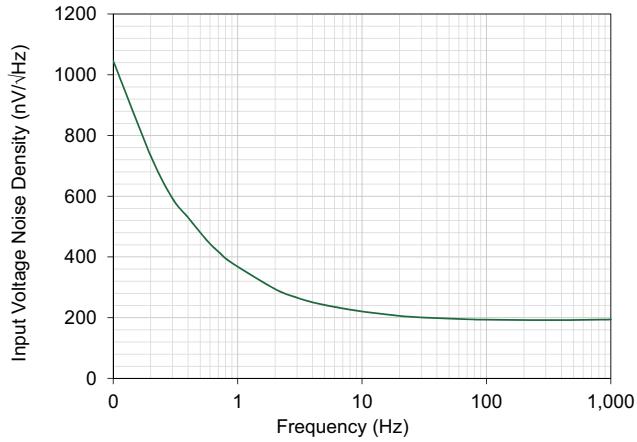


Fig 10. Input Noise Voltage Density vs. Frequency

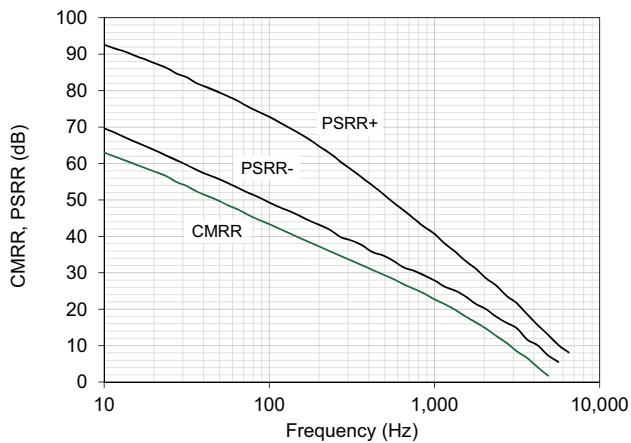


Fig 8. CMRR, PSRR vs. Frequency
 $V_{DD} = 3.3 V$.

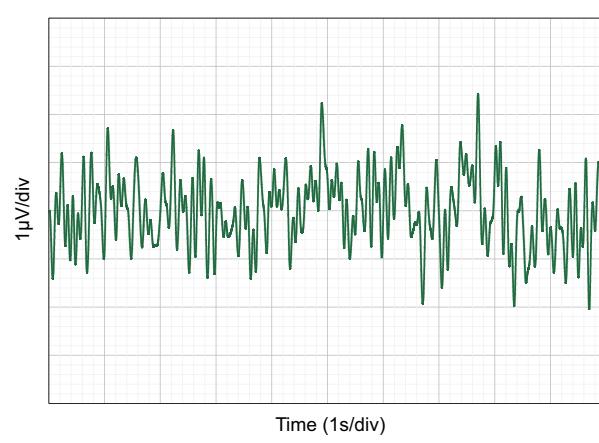


Fig 11. 0.1 Hz to 10 Hz Noise

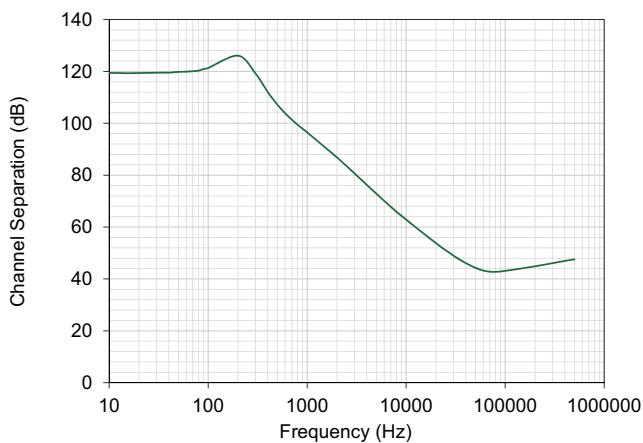


Fig 9. Channel Separation vs. Frequency

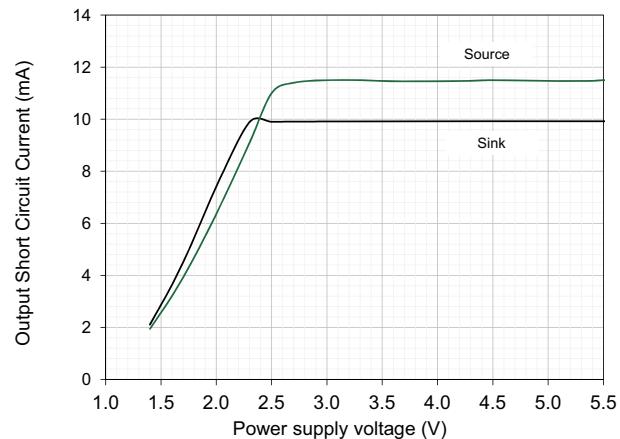


Fig 12. Output Short Circuit Current vs. V_{DD}



SILEGO

SLG88103/4

$T_A = 25^\circ\text{C}$, $V_{DD} = 5.0\text{ V}$, $V_{SS} = \text{GND}$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1\text{ M}\Omega$ to V_L , $C_L = 80\text{ pF}$, unless otherwise stated.

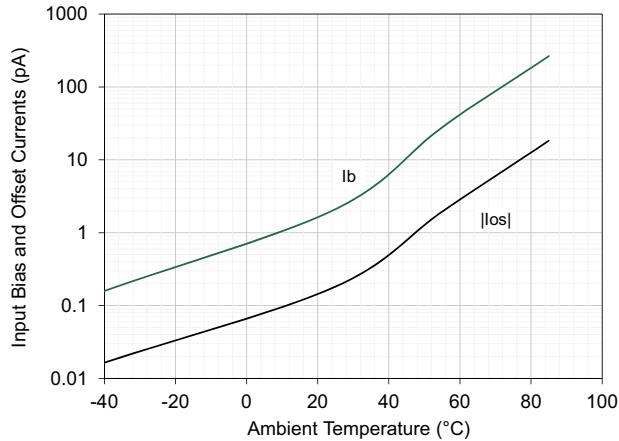


Fig 13. Input Bias, Offset Currents vs. T_A
 $V_{DD} = 3.3\text{ V}$.

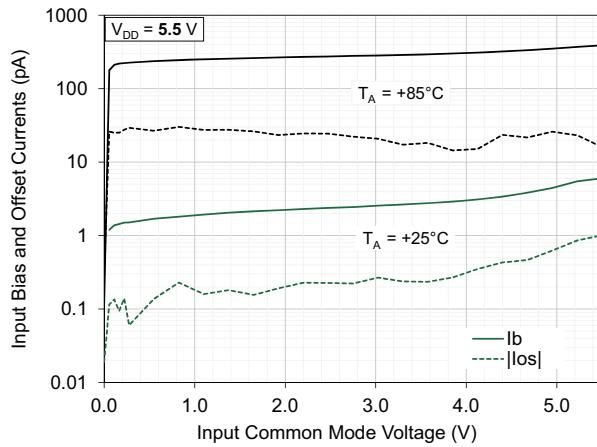


Fig 14. Input Bias, Offset Currents vs. V_{CM}
 $V_{DD} = 5.5\text{ V}$.

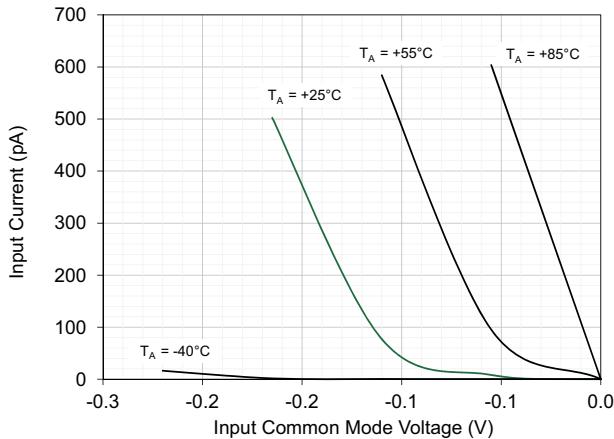


Fig 15. Input Current vs. V_{CM} (below V_{SS})
 $V_{DD} = 5.5\text{ V}$.

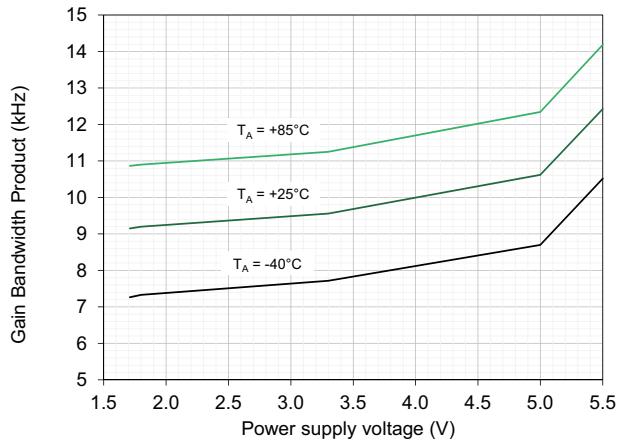


Fig 16. Gain Bandwidth Product vs. Power Supply Voltage

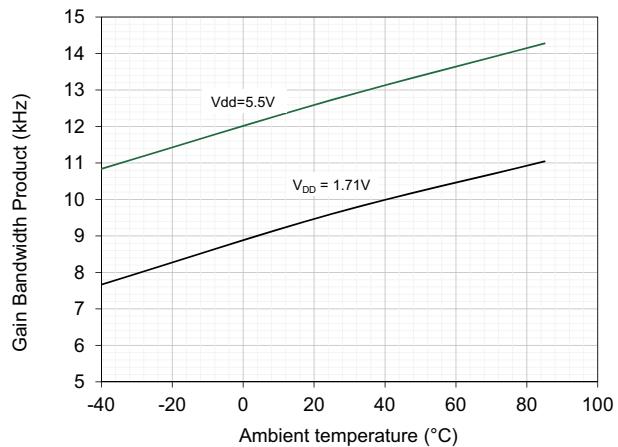


Fig 17. Gain Bandwidth Product vs. Ambient Temperature

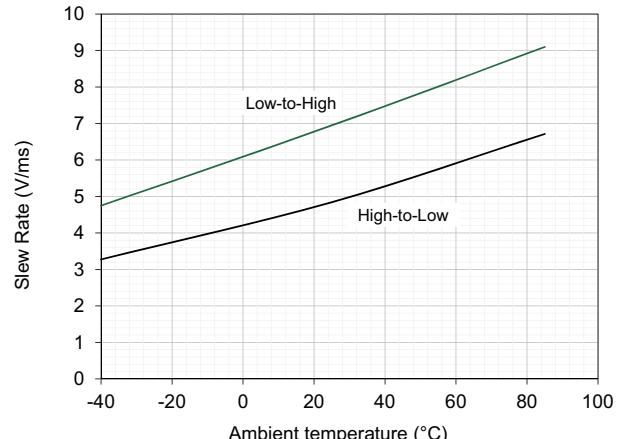


Fig 18. Slew Rate vs. Ambient Temperature
 $G = 1\text{ V/V}$; $R_L = 50\text{ k}\Omega$



SILEGO

SLG88103/4

$T_A = 25^\circ C$, $V_{DD} = 5.0$ V, $V_{SS} = GND$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1 M\Omega$ to V_L , $C_L = 80$ pF, unless otherwise stated.

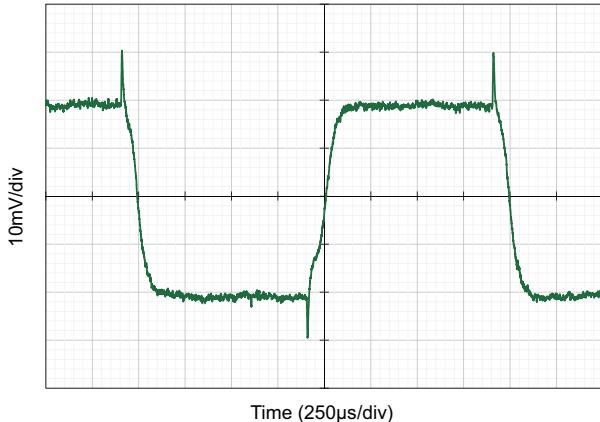


Fig 19. Small Signal Inverting Step Response
 $G = -1$ V/V; $R_L = 50$ k Ω ; $C_L = 60$ pF.

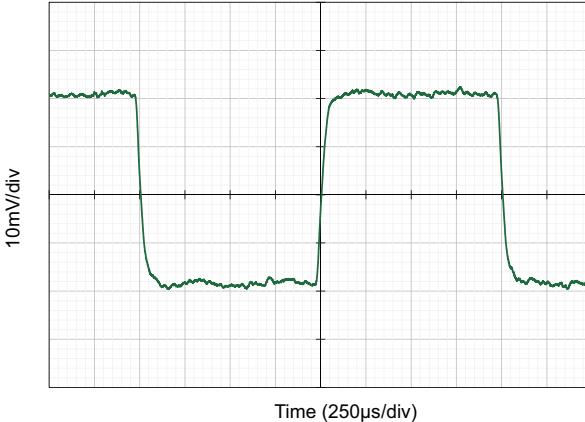


Fig 22. Small Signal Non-inverting Step Response
 $G = 1$ V/V; $R_L = 50$ k Ω ; $C_L = 60$ pF.

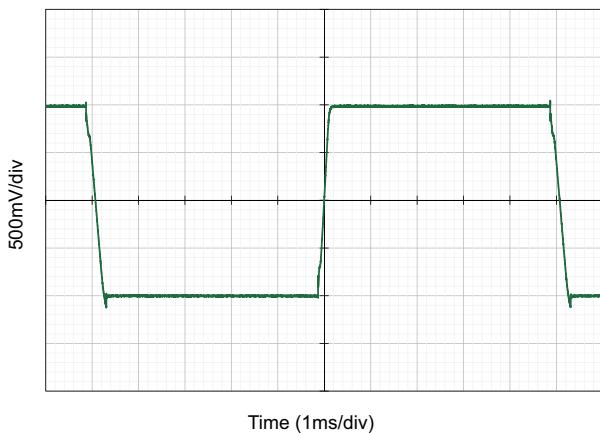


Fig 20. Large Signal Inverting Step Response
 $G = -1$ V/V; $R_L = 50$ k Ω ; $C_L = 80$ pF.

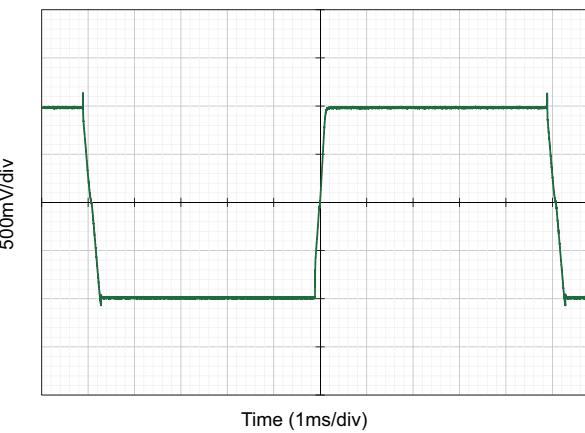


Fig 23. Large Signal Non-inverting Step Response
 $G = 1$ V/V; $R_L = 50$ k Ω ; $C_L = 60$ pF.

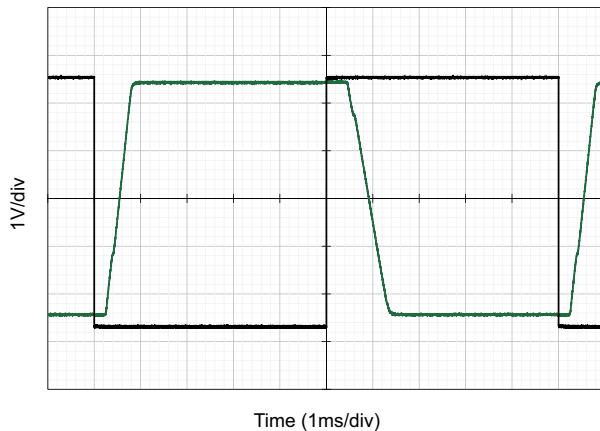


Fig 21. Inverting Overload Recovery
 $G = -1$ V/V; $R_L = 50$ k Ω ; $C_L = 60$ pF.

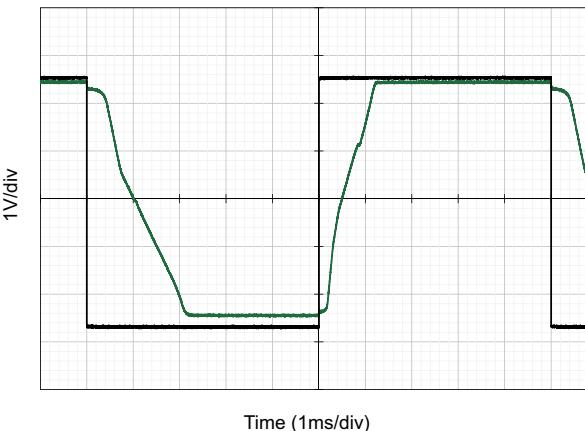


Fig 24. Non-Inverting Overload Recovery
 $G = 1$ V/V; $R_L = 50$ k Ω ; $C_L = 60$ pF.



SILEGO

SLG88103/4

$T_A = 25^\circ\text{C}$, $V_{DD} = 5.0\text{ V}$, $V_{SS} = \text{GND}$, $V_{CM} = V_{DD}/2$, $V_{OUT} = V_{DD}/2$, $V_L = V_{DD}/2$, $R_L = 1\text{ M}\Omega$ to V_L , $C_L = 80\text{ pF}$, unless otherwise stated.

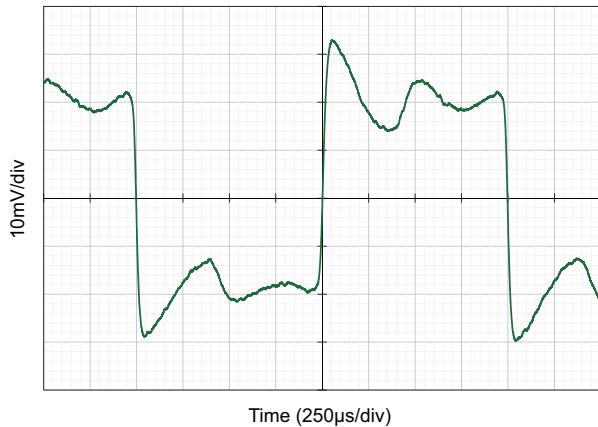


Fig 25. Small Signal Non-inverting Step Response
 $G = 1\text{ V/V}$; $R_L = 50\text{ k}\Omega$; $C_L = 10\text{ nF}$.

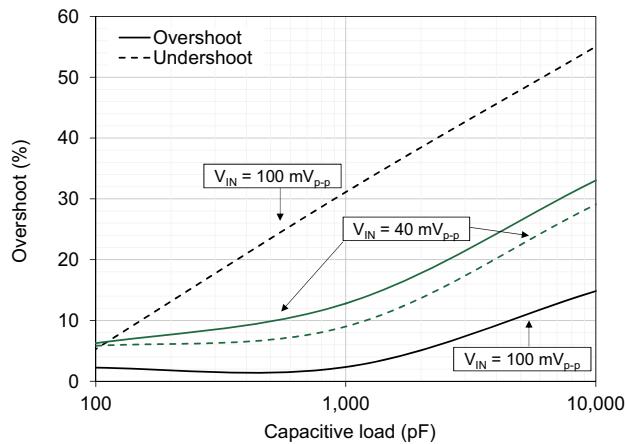


Fig 26. Small Signal Overshoot vs. Capacitive Load
 $V_{DD} = 3.3\text{ V}$; $V_{IN} = 40$ and 100 mV p-p ; $G = 1\text{ V/V}$.

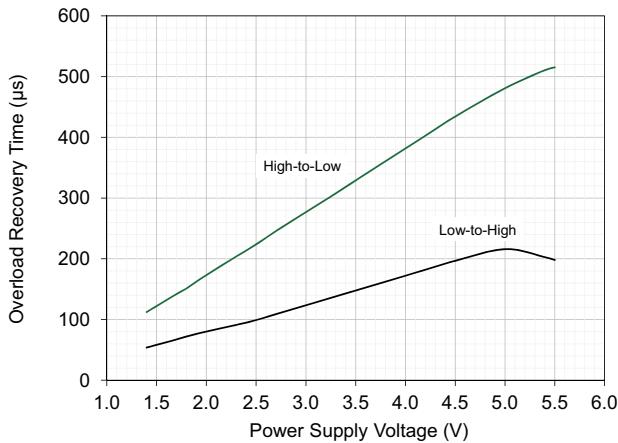


Fig 27. Overload Recovery Time vs. Power Supply Voltage
 $R_L = 50\text{ k}\Omega$; $G = 1\text{ V/V}$.

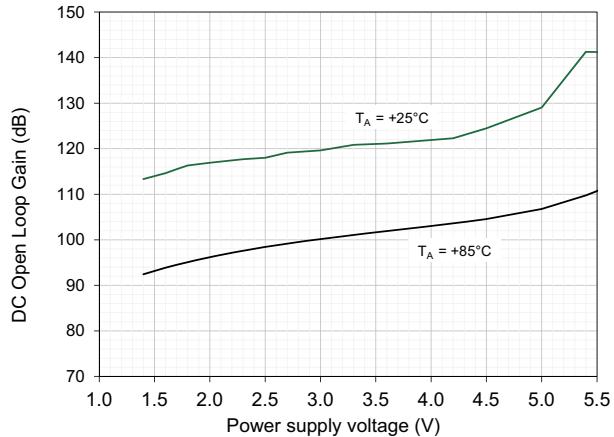


Fig 28. DC Open Loop Gain vs. Power Supply Voltage
 $R_L = 50\text{ k}\Omega$

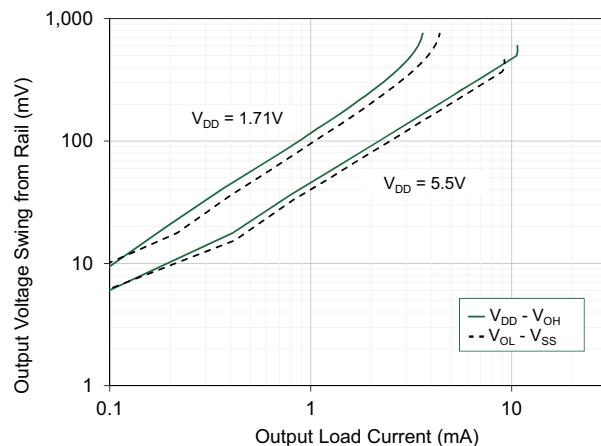


Fig 29. Output Voltage Swing from Rail vs. I_{OUT}
 $V_{DD} = 1.71\text{ V}$ and 5.5 V .

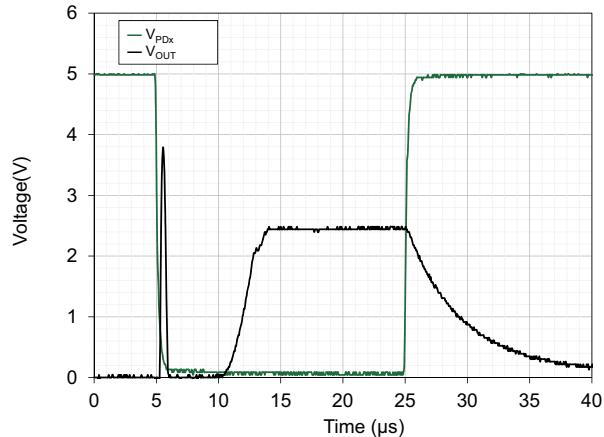


Fig 30. Output Response to Power Down Signal
 $G = 1\text{ V/V}$; $R_L = 50\text{ k}\Omega$; $C_L = 20\text{ pF}$; $V_{IN} = V_S/2$.



Applications Information

The SLG88103/4 operates on a 1.71 V to 5.5 V power supply over a wide industrial temperature range from -40 °C to 85 °C. This dual/quad op amp chip has two/four active low enable pins used to individually power-up / power-down each op amp. Its common-mode range extends from 0 to V_{DD} and its output swings from rail-to-rail.

Input Protection

Voltage spikes need to be controlled at the inputs of each operational amplifier in order to avoid damaging the device. Electrical events like electrostatic discharge can produce large voltages at these nodes. The SLG88103/4 has internal circuitry to protect the device from these events. If V_{IN} exceeds V_{DD} or drops below V_{SS} , additional currents will flow through the internal ESD diodes and can damage the device even if the supplies are turned off.

In this case we recommend placing a resistor in series to the input to limit current through the internal ESD diodes to 5 mA (or preferably less).

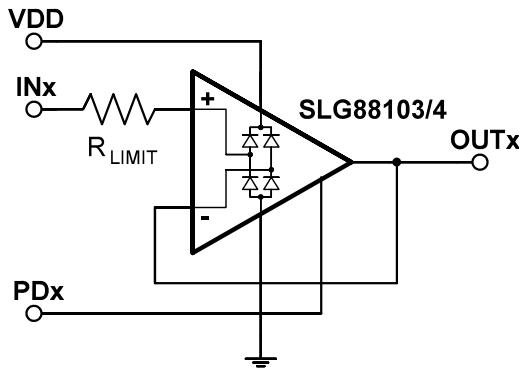


Fig 31. ESD Protection .

Driving Capacitive Loads

Capacitive loads degrade circuit stability by decreasing the phase margin and bandwidth of the operational amplifier circuit. The SLG88103/4 can drive capacitive loads up to 10 nF at low loads. The amplifier's output impedance and the capacitive load add phase lag to the system. This phase lag creates gain peaking in the frequency response and peaking/ringing in the output's transient response. When large capacitive loads need to be driven, isolation resistors need to be used to increase the phase margin. This is done by increasing the output load impedance at higher frequencies. After selecting an isolation resistor value, verify that the frequency peaking and transient overshoot and ringing have been reduced.

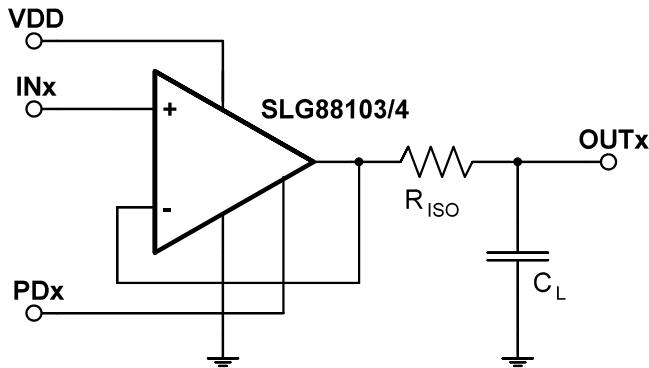


Fig 32. Capacitive Load Test Circuit.



Low Power Considerations

The SLG88103/4 features low quiescent current at 375 nA per amplifier, as well as extremely high-impedance CMOS inputs. To take most advantage of such low power features, high impedance external components should be used. We recommend using low-leakage capacitors (such as ceramic). Other types of capacitors (such as aluminum dielectric) can leak at uA levels and consume more quiescent power than the op-amp itself! High value resistors are needed to keep power consumption low, as well as to avoid gain loss and non-linearities due to loading effects on the ultra-low power-stage of the op amp. On the other hand, higher resistances increase thermal noise and sensitivity to external interference. We recommend impedances between 100 k Ω and 500 k Ω in gain/feedback networks to achieve balanced performance given the ultra-low power characteristics of SLG88103/4.

PCB Layout

For proper PCB layout, place a 100 nF decoupling capacitor close to the VDD pin of the SLG88103/4. To improve sensitive system performance, keep trace lengths similar on the positive and negative inputs of the op amp. Keep feedback resistors as close to the op amp and as short as possible. In addition, remove the PCB ground plane from under the inputs and outputs of the op amp.

For low current applications, board leakage currents on sensitive, high impedance inputs can degrade signal integrity. To maximize system performance, use guard rings / shields around these high impedance op amp inputs. For non-inverting op amps, IN+ should have a guard ring driven to the voltage of IN- by a low impedance source. Similarly, the guard ring around IN- should be driven to IN+ for an inverting amplifier. The IN- and IN+ nodes for non-inverting and inverting amplifiers respectively can be used as low impedance voltage sources. This is because these nodes are effectively low impedance nodes due to op amp feedback properties. For a non-inverting amplifier, leakage current on IN+ will produce a voltage on the input that will be amplified to the op amp's output. On the other hand, the op amp will fight changes in voltage on IN- to match the voltage potential at IN+. These guard rings should be used on both sides of the PCB to help sink stray currents on the PCB before the currents can reach the input pins of the op amp and to minimize stray capacitance.

Proper Setup for Unused Op Amps

For an unused op amp on the SLG88103/4, connect the op amp as a voltage follower with the input tied to ground and its enable pin tied to VDD. An example circuit using one of the op amps is shown below.

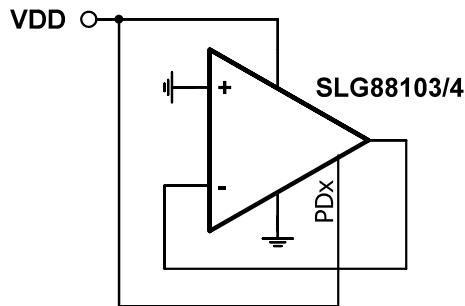


Fig 33. Unused Op Amp Setup.

Application Examples

The SLG88103/4 excels in low-power applications that operate at low frequencies. Please see the "Application Notes" section of this datasheet for application examples which use the SLG88103/4.



Design Resources

1. Spice Macro Model

The most recent SPICE model is available on Silego's website at www.silego.com. This model is intended for simulation purposes only and shouldn't be used in place of hardware testing to verify proper functionality in a full system.

2. Application Notes

For more information on the topics discussed in this datasheet and applications of this device, please see the following applications notes available online at our [Application Notes Page](#). New Application Notes are added regularly.

[AN-1106 Custom Instrumentation Amplifier Design](#)

3. Design Support

Please contact a Silego Representative at our [Contact Page](#) for more information on the SLG88103/4. They will be happy to assist you by answering additional questions and by offering design support for projects relating to the SLG88103/4 and Silego's GreenPAK devices.

4. Op Amp + GreenPAK EVB

The OP AMP+GreenPAK EVB provides convenient breakout access for various IC's in Silego's Op Amp and GreenPAK product families. Please see the OP AMP+EVB Layout Guide for more information on which GreenPAK devices and op amps can be placed on this PCB.

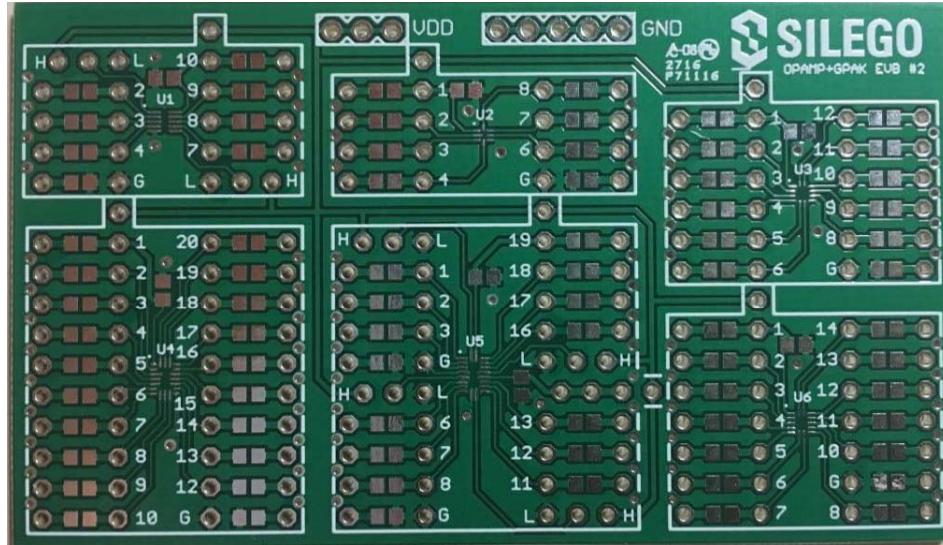



Fig 34. Op Amp + GreenPAK EVB.



SILEGO

SLG88103/4

Package Top Marking System Definition - SLG88103

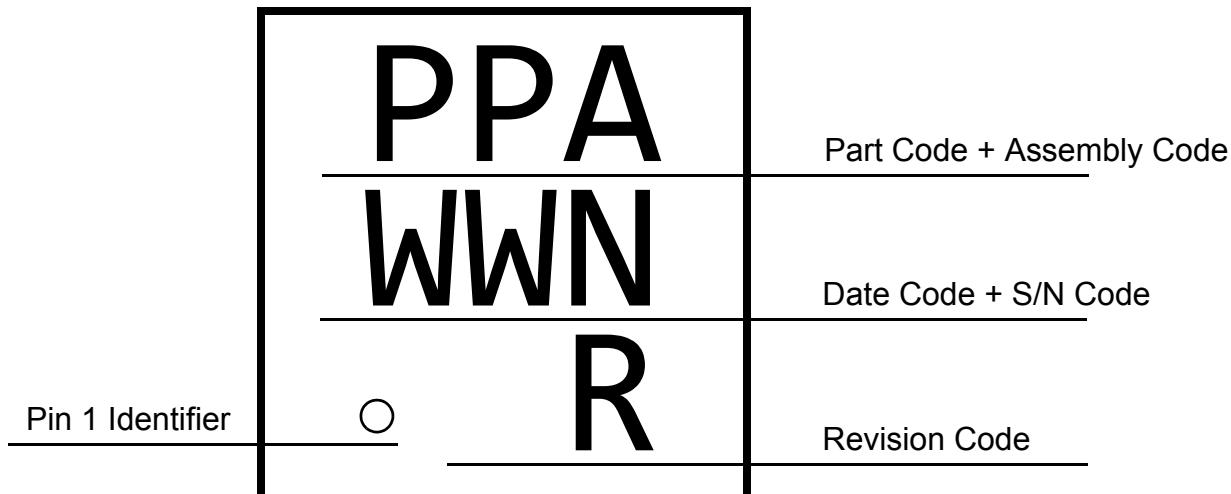

PP - Part ID Field

WW - Date Code Field¹

N - Lot Traceability Code Field¹

A - Assembly Site Code Field²

R - Part Revision Code Field²

Note 1: Each character in code field can be alphanumeric A-Z and 0-9


Note 2: Character in code field can be alphabetic A-Z



SILEGO

SLG88103/4

Package Top Marking System Definition - SLG88104

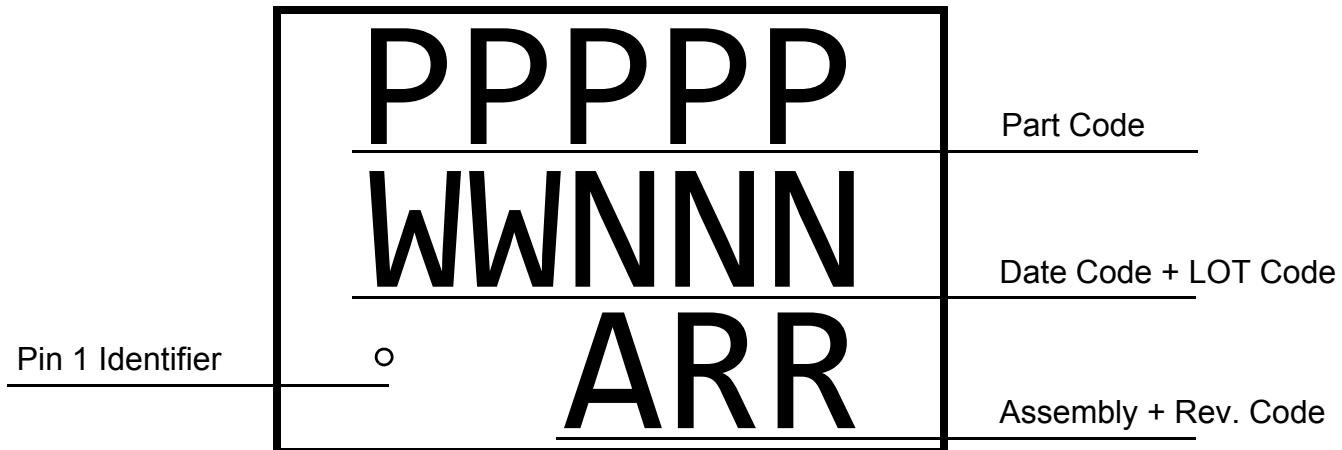

PPPPP - Part ID Field

WW - Date Code Field¹

NNN - Lot Traceability Code Field¹

A - Assembly Site Code Field²

RR - Part Revision Code Field²

Note 1: Each character in code field can be alphanumeric A-Z and 0-9

Note 2: Character in code field can be alphabetic A-Z




SILEGO

SLG88103/4

Package Drawing and Dimensions - SLG88103

10 Lead STDFN Package
JEDEC MO-252

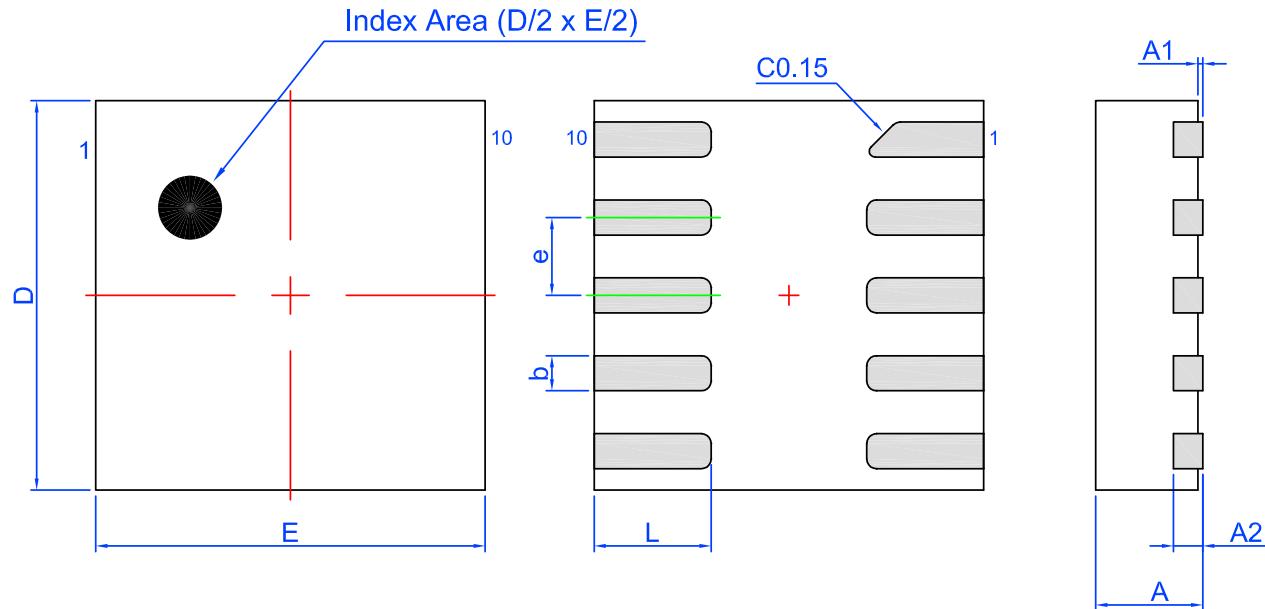

Unit: mm


| Symbol | Min | Nom. | Max | Symbol | Min | Nom. | Max |
|--------|-------|----------|-------|--------|------|----------|------|
| A | 0.50 | 0.55 | 0.60 | D | 1.95 | 2.00 | 2.05 |
| A1 | 0.005 | - | 0.050 | E | 1.95 | 2.00 | 2.05 |
| A2 | 0.10 | 0.15 | 0.20 | L | 0.55 | 0.60 | 0.65 |
| b | 0.13 | 0.18 | 0.23 | C | | 0.15 REF | |
| e | | 0.40 BSC | | | | | |



SILEGO

SLG88103/4

Package Drawing and Dimensions - SLG88104

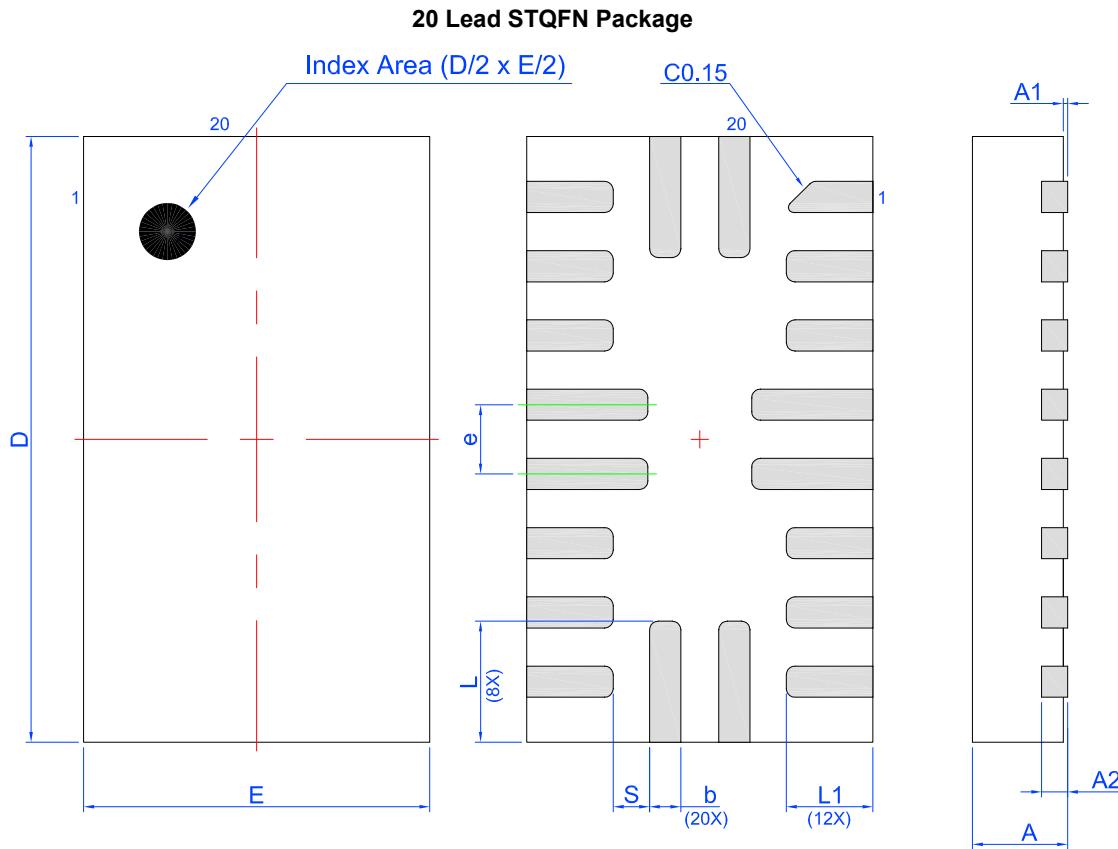

Unit: mm


| Symbol | Min | Nom. | Max | Symbol | Min | Nom. | Max |
|--------|-------|----------|-------|--------|------|----------|------|
| A | 0.50 | 0.55 | 0.60 | D | 3.45 | 3.50 | 3.55 |
| A1 | 0.005 | - | 0.050 | E | 1.95 | 2.00 | 2.05 |
| A2 | 0.10 | 0.15 | 0.20 | L | 0.65 | 0.70 | 0.75 |
| b | 0.13 | 0.18 | 0.23 | L1 | 0.45 | 0.50 | 0.55 |
| e | | 0.40 BSC | | C | | 0.15 REF | |
| S | | 0.21 REF | | | | | |



SILEGO

SLG88103/4

Recommended Land Pattern - SLG88103

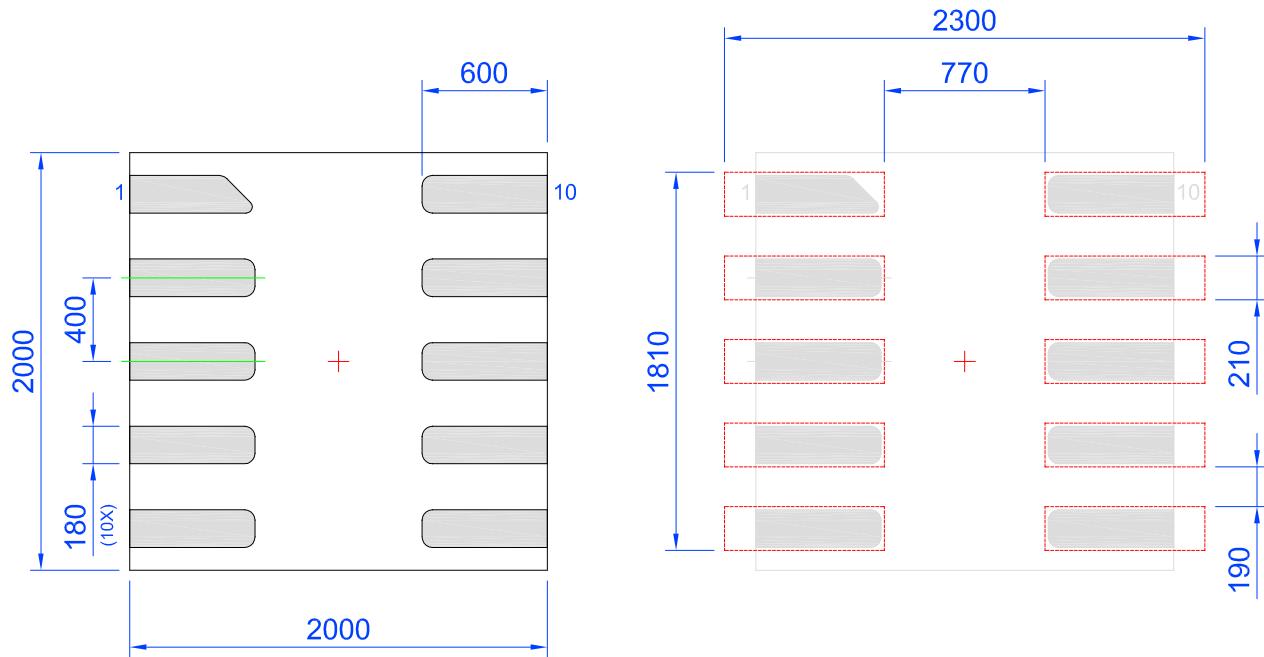

Unit: um

Recommended Reflow Soldering Profile


Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 2.2 mm³ (nominal). More information can be found at www.jedec.org.



SILEGO

SLG88103/4

Recommended Land Pattern - SLG88104

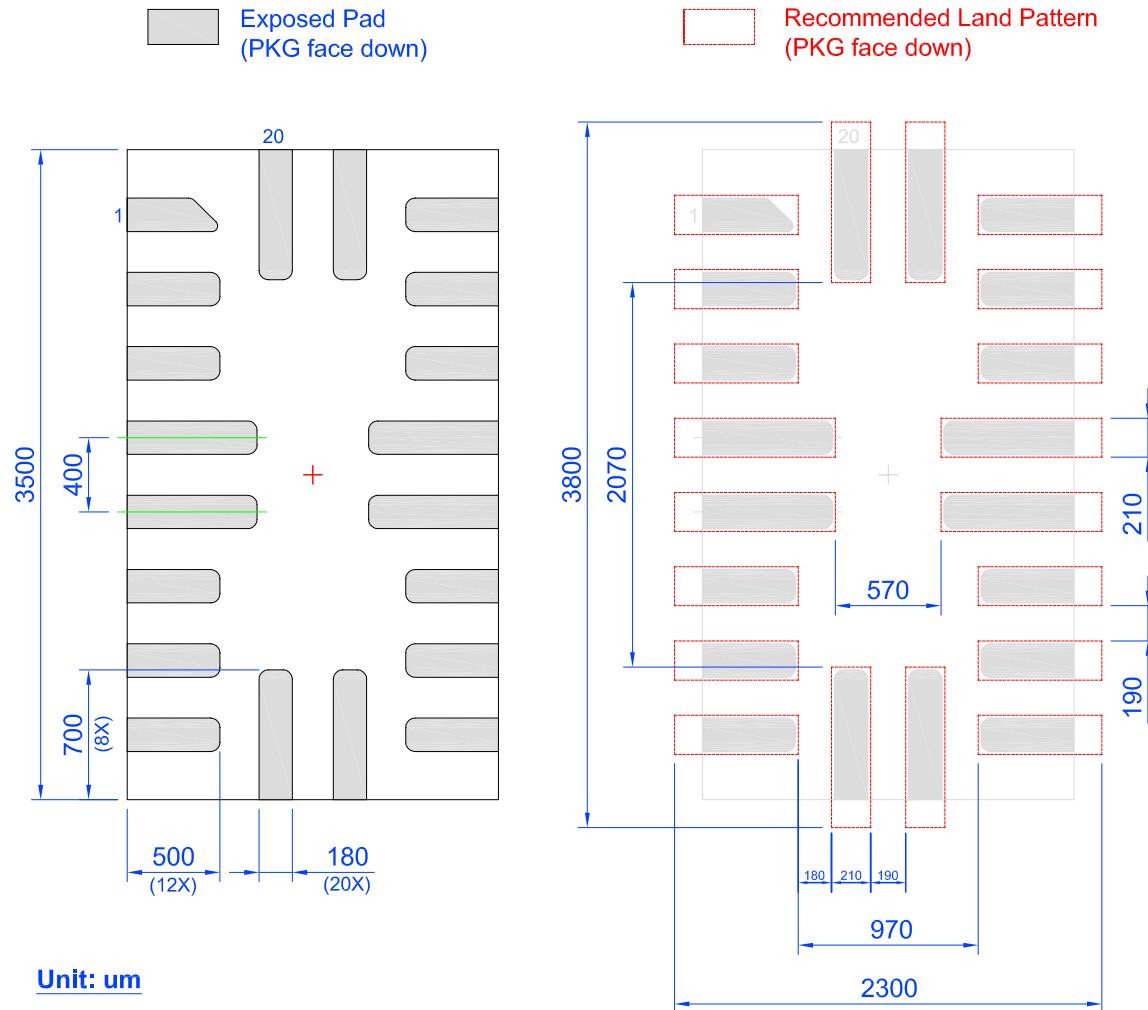

Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 3.85 mm³ (nominal). More information can be found at www.jedec.org.



SILEGO


SLG88103/4

Tape and Reel Specifications

| Package Type | # of Pins | Nominal Package Size [mm] | Max Units | | Reel & Hub Size [mm] | Leader (min) | | Trailer (min) | | Tape Width [mm] | Part Pitch [mm] |
|---|-----------|---------------------------|-----------|---------|----------------------|--------------|-------------|---------------|-------------|-----------------|-----------------|
| | | | per Reel | per Box | | Pockets | Length [mm] | Pockets | Length [mm] | | |
| STDFN 10L 2x2mm 0.4P COL Green | 10 | 2 x 2 x 0.55 | 3000 | 3000 | 178 / 60 | 100 | 400 | 100 | 400 | 8 | 4 |
| STQFN 20L 2x3.5mm 0.4P Green | 20 | 2 x 3.5 x 0.55 | 5000 | 10000 | 330 / 100 | 42 | 336 | 42 | 336 | 12 | 8 |

Carrier Tape Drawing and Dimensions - SLG88103


| Package Type | Pocket BTM Length | Pocket BTM Width | Pocket Depth | Index Hole Pitch | Pocket Pitch | Index Hole Diameter | Index Hole to Tape Edge | Index Hole to Pocket Center | Tape Width |
|--------------------------------------|-------------------|------------------|--------------|------------------|--------------|---------------------|-------------------------|-----------------------------|------------|
| | A0 | B0 | K0 | P0 | P1 | D0 | E | F | W |
| STDFN 10L 2x2mm 0.4P COL Green | 2.2 | 2.2 | 0.83 | 4 | 4 | 1.55 | 1.75 | 3.5 | 8 |

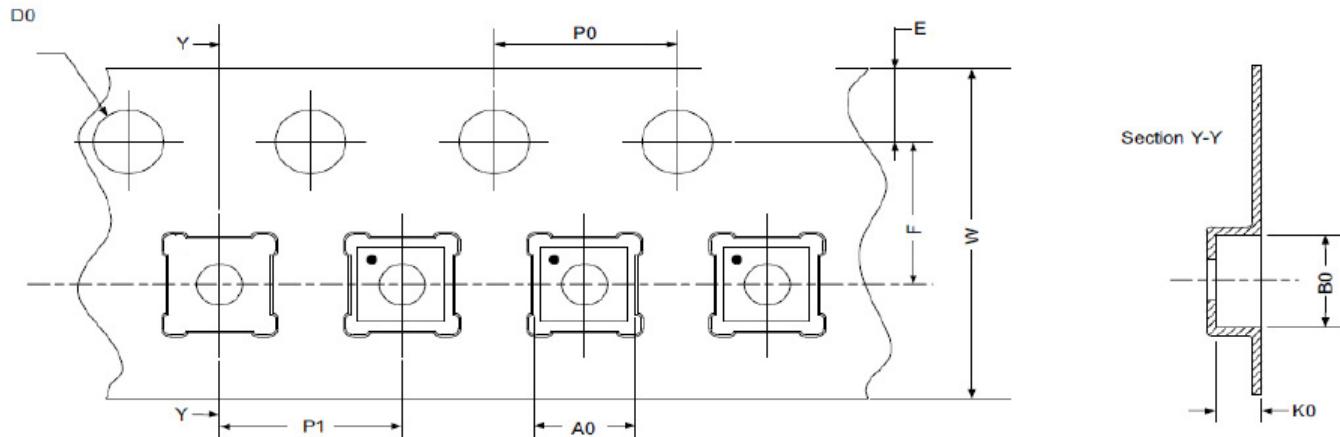

Refer to EIA-481 specification

**SILEGO****SLG88103/4****Carrier Tape Drawing and Dimensions Dimensions - SLG88104**

| Package Type | Pocket BTM Length | Pocket BTM Width | Pocket Depth | Index Hole Pitch | Pocket Pitch | Index Hole Diameter | Index Hole to Tape Edge | Index Hole to Pocket Center | Tape Width |
|------------------------------------|-------------------|------------------|--------------|------------------|--------------|---------------------|-------------------------|-----------------------------|------------|
| | A0 | B0 | K0 | P0 | P1 | D0 | E | F | W |
| STQFN 20L 2x3.5mm 0.4P Green | 2.2 | 3.8 | 0.8 | 4 | 8 | 1.5 | 1.75 | 5.5 | 12 |

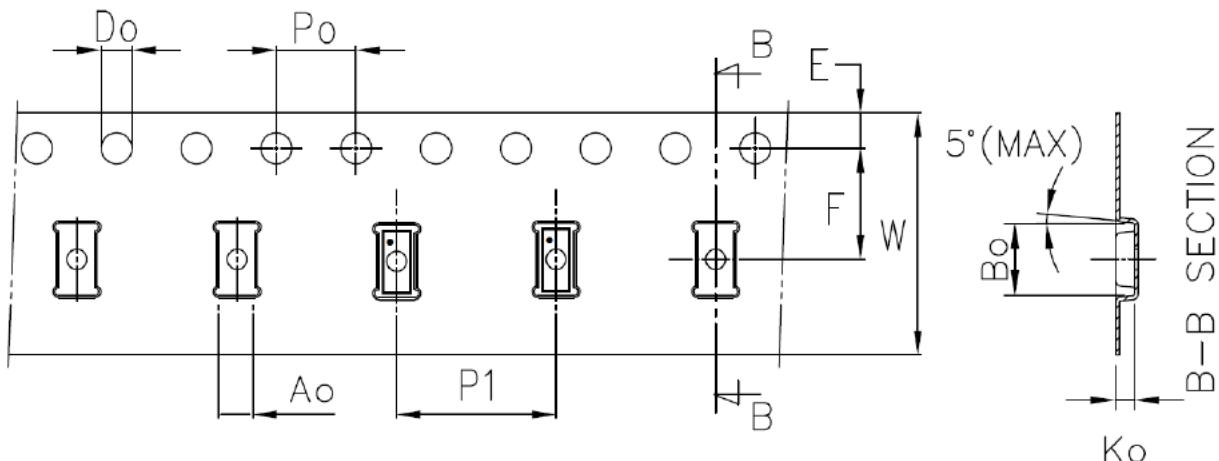**Refer to EIA-481 specification**



SILEGO

SLG88103/4

Revision History

| Date | Version | Change |
|-----------|---------|--|
| 3/13/2017 | 1.01 | Replaced Slew Rate vs. Ambient Temperature Chart Fixed Chart formatting for some charts. Fixed typos |
| 3/1/2017 | 1.00 | Production Release |



Silego Website & Support

Silego Technology Website

Silego Technology provides online support via our website at <http://www.silego.com/>. This website is used as a means to make files and information easily available to customers.

For more information regarding Silego Green products, please visit:

GreenPAK

<http://greenpak.silego.com/>
<http://greenpak2.silego.com/>
<http://greenpak3.silego.com/>

GreenFET

<http://greenfet.silego.com/>
<http://greenfet2.silego.com/>
<http://greenfet3.silego.com/>

GreenCLK

<http://greenclk.silego.com/>
<http://greenclk2.silego.com/>
<http://greenclk3.silego.com/>

Products are also available for purchase directly from Silego at the Silego Online Store at <http://store.silego.com/>.

Silego Technical Support

Datasheets and errata, application notes and example designs, user guides, and hardware support documents and the latest software releases are available at the Silego website or can be requested directly at info@silego.com.

For specific GreenPAK design or applications questions and support please send e-mail requests to GreenPAK@silego.com

Users of Silego products can receive assistance through several channels:

Online Live Support

Silego Technology has live video technical assistance and sales support available at <http://www.silego.com/>. Please ask our live web receptionist to schedule a 1 on 1 training session with one of our application engineers.

Contact Your Local Sales Representative

Customers can contact their local sales representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. More information regarding your local representative is available at the Silego website or send a request to info@silego.com

Contact Silego Directly

Silego can be contacted directly via e-mail at info@silego.com or user submission form, located at the following URL:

<http://support.silego.com/>

Other Information

The latest Silego Technology press releases, listing of seminars and events, listings of world wide Silego Technology offices and representatives are all available at <http://www.silego.com/>

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. SILEGO TECHNOLOGY DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. SILEGO TECHNOLOGY RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331