


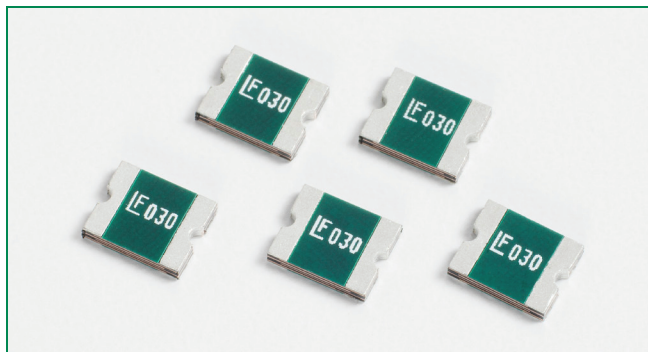

Description

The 2016L Series PTC provides surface mount overcurrent protection for low voltage ($\leq 60V$) applications where resettable protection is desired.

Features

- RoHS compliant, lead-free and halogen-free
- Fast response to fault currents
- High voltage
- Low-profile

Applications

- IEE1394 port protection
- Powered ethernet port protection (IEEE 802.3 af)
- Automotive electronic control module protection
- Low voltage telecom equipment protection

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E183209
	R50119118

Electrical Characteristics

Part Number	Marking	I_{hold} (A)	I_{trip} (A)	V_{max} (Vdc)	I_{max} (A)	P_d typ. (W)	Maximum Time To Trip		Resistance			Agency Approvals	
							Current (A)	Time (Sec.)	R_{min} (Ω)	R_{typ} (Ω)	R_{1max} (Ω)		
2016L030	LF030	0.30	0.60	60	20	1.40	1.5	3.0	0.500	1.40	2.30	X	X
2016L050	LF050	0.55	1.10	60	20	1.40	2.5	5.0	0.200	0.70	1.00	X	X
2016L075/60	LF075-60	0.75	1.50	60	20	1.40	8.0	0.5	0.130	0.50	0.90	*	*
2016L100	LF100	1.10	2.20	15	40	1.40	8.0	0.5	0.100	0.25	0.40	X	X
2016L100/33	LF100-33	1.10	2.20	33	40	1.40	8.0	0.5	0.100	0.25	0.40	X	X
2016L150	LF150	1.50	3.00	15	40	1.40	8.0	1.0	0.070	0.13	0.18	X	X
2016L200	LF200	2.00	4.20	6	40	1.40	8.0	3.0	0.048	0.07	0.10	X	X

I_{hold} = Hold current: maximum current device will pass without tripping in 20°C still air.

I_{trip} = Trip current: minimum current at which the device will trip in 20°C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})

P_d = Power dissipated from device when in the tripped state at 20°C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.

R_{typ} = Typical resistance of device in initial (un-soldered) state.

R_{1max} = Maximum resistance of device at 20°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.

Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.


Effective September 15, 2009 onward, all 2016L PTC products will be manufactured Halogen Free (HF). Existing Non-Halogen Free 2016L PTC products will continue to be sold until supplies are depleted. Effective January 1, 2010, all 2016L PTC product will be manufactured and sold as Halogen Free by default, and the "HF" part number suffix code will be discontinued – Refer to Part Ordering Number System and Packaging Options sections for additional information.

* Agency Approval is Pending

Temperature Derating


Part Number	Ambient Operation Temperature								
	-40°C	-20°C	0°C	23°C	40°C	50°C	60°C	70°C	85°C
Hold Current (A)									
2016L030	0.45	0.40	0.35	0.30	0.25	0.23	0.20	0.18	0.14
2016L050	0.93	0.80	0.65	0.50	0.38	0.32	0.25	0.19	0.09
2016L075/60	1.21	1.06	0.91	0.75	0.61	0.54	0.45	0.38	0.26
2016L100	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
2016L100/33	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
2016L150	2.26	2.00	1.76	1.50	1.24	1.13	1.00	0.87	0.68
2016L200	2.80	2.50	2.19	2.00	1.84	1.74	1.50	1.34	1.14

Average Time Current Curves

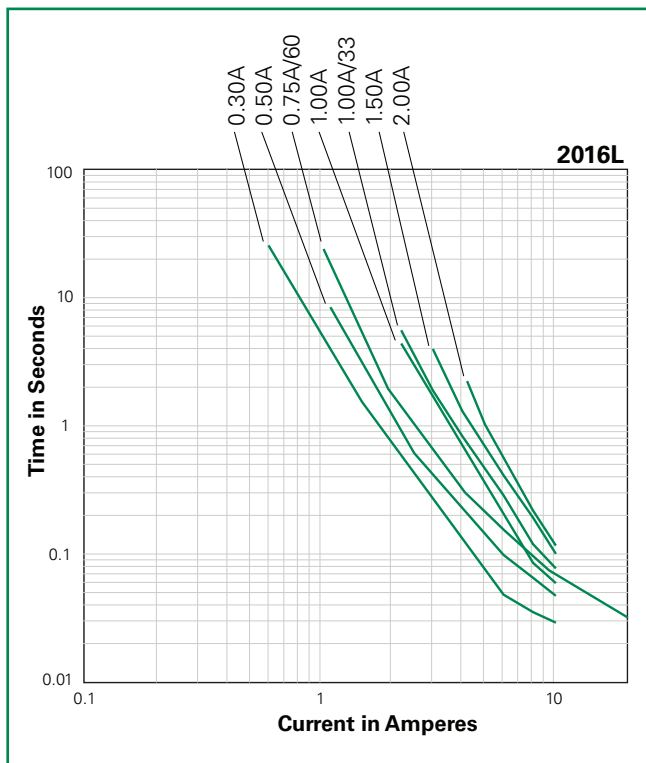

The average time current curves and Temperature Derating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

Temperature Derating Curve

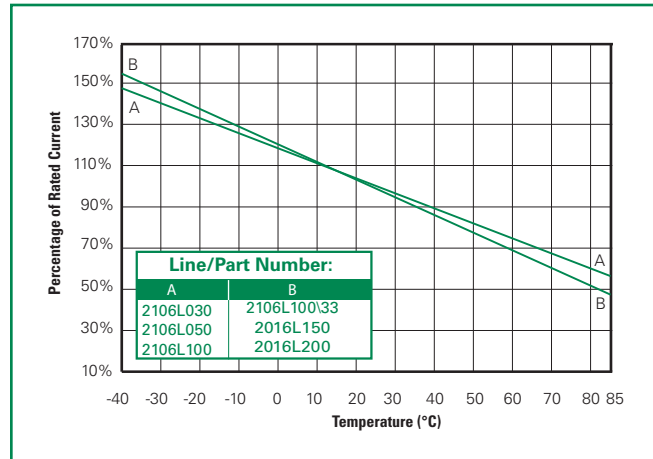


Soldering Parameters

Condition	Reflow
Peak Temp/ Duration Time	260°C / 10 Sec
Time above liquids (TAL) 220°C	60 Sec ~ 100 Sec
Preheat 120°C~ 180°C	50 Sec ~ 150 Sec
Storage Condition	0°C~35°C, ≤70%RH

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead-free
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Devices can be cleaned using standard industry methods and solvents.

Note: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

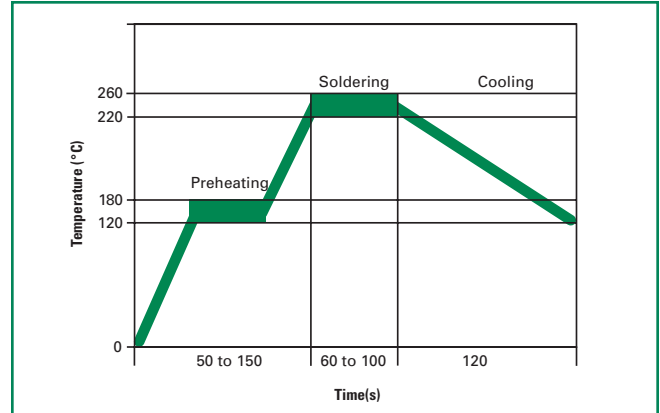


Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material: Matte Tin(Sn))
Lead Solderability	Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3.

Environmental Specifications


Operating/Storage Temperature	-40°C to +85°C
Maximum Device Surface Temperature in Tripped State	125°C
Passive Aging	+85°C, 1000 hours -/+5% typical resistance change
Humidity Aging	+85°C, 85%, R.H., 1000 hours -/+5% typical resistance change
Thermal Shock	MIL-STD-202, Method 107G +85°C/-40°C 20 times -30% typical resistance change
Solvent Resistance	MIL-STD-202, Method 215 No change
Vibration	MIL-STD-883C, Method 2007.1, Condition A No change
Moisture Sensitivity Level	Level 1, J-STD-020C

Dimensions (mm)

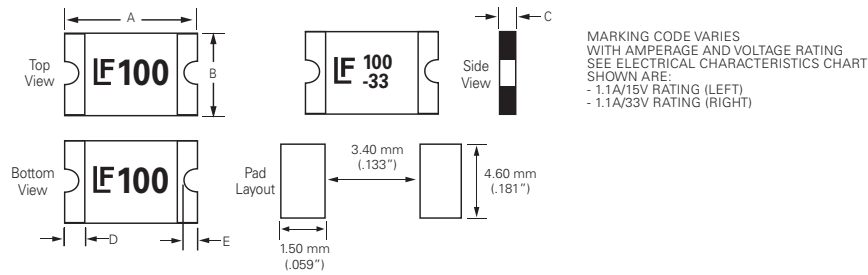

Part Number	A				B				C				D				E			
	Inches		mm		Inches		mm		Inches		mm		Inches		mm		Inches		mm	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
2016L030									0.03	0.05	0.75	1.25								
2016L050									0.05	0.08	1.2	2								
2016L075/60									0.05	0.08	1.2	2								
2016L100	0.19	0.21	4.72	5.44	0.15	0.17	3.7	4.43	0.02	0.03	0.5	0.75	0.01	0.06	0.3	1.5	0.01	0.03	0.25	0.65
2016L100/33									0.03	0.05	0.75	1.25								
2016L150									0.03	0.06	0.75	1.55								
2016L200									0.02	0.03	0.5	0.75								

Part Ordering Number System

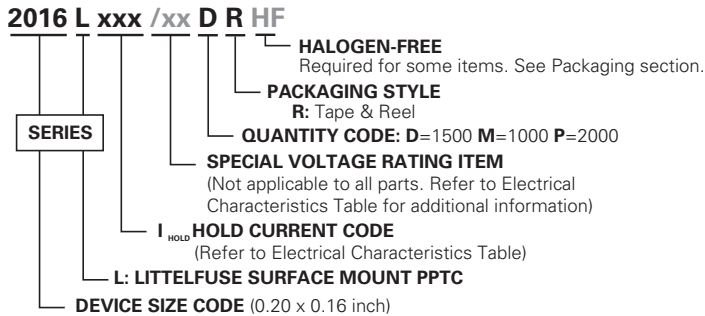

Packaging


Part Number	Ordering Number	Halogen Free	I _{hold} (A)	I _{hold} Code	Voltage Option	Packaging Option	Quantity	Quantity & Packaging Codes
2016L030	2016L030DRHF	Yes	0.30	030		Tape and Reel	1500	DR
	2016L030DR	No						
2016L050	2016L050MRHF	Yes	0.55	050		Tape and Reel	1000	MR
	2016L050MR	No						
2016L075/60	2016L075/60MR	Yes	0.75	075	/60	Tape and Reel	1000	MR
2016L100	2016L100PRHF	Yes	1.10	110		Tape and Reel	2000	PR
	2016L100PR	No						
2016L100/33	2016L100/33DRHF	Yes	1.10	110	/33	Tape and Reel	1500	DR
	2016L100/33DR	No						
2016L150	2016L150DRHF	Yes	1.50	150		Tape and Reel	1500	DR
	2016L150DR	No						
2016L200	2016L200PRHF	Yes	2.00	200		Tape and Reel	2000	PR
	2016L200PR	No						

* Effective September 15, 2009 onward, all 2016L PTC products will be manufactured Halogen Free (HF). Existing Non-Halogen Free 2016L PTC products will continue to be sold until supplies are depleted. Effective January 1, 2010, all 2016L PTC product will be manufactured and sold as Halogen Free by default, and "HF" part number suffix code will be discontinued.

Tape and Reel Specifications

TAPE SPECIFICATIONS: EIA-481-1 (mm)				REEL DIMENSIONS: EIA-481-1 (mm)	
	2016L100 2016L200	2016L030 2016L100/33 2016L150	2016L050 2016L075/60		
W	12.0+/-0.30	12.0+/-0.30	12.0+/-0.30	H	12.0+/-0.05
F	5.50+/-0.05	5.50+/-0.05	5.50+/-0.05	W	13.2+/-1.5
E₁	1.75+/-0.10	1.75+/-0.10	1.75+/-0.10	D	Ø 60+0.5
D₀	1.55+/-0.05	1.55+/-0.05	1.55+/-0.05	F	Ø13.0+/-0.2
D₁	1.50 (MIN)	1.50 (MIN)	1.50 (MIN)	C	Ø178+/-1.0
P₀	4.0+/-0.10	4.0+/-0.10	4.0+/-0.10	H₁	11+/-0.5
P₁	8.0+/-0.10	8.0+/-0.10	8.0+/-0.10	W₁	2.2+/-0.5
P₂	2.0+/-0.05	2.0+/-0.05	2.0+/-0.05	W₂	3.0+0.5
A₀	4.40+/-0.10	4.48+/-0.10	4.45+/-0.10	W₃	4.0+0.5
B₀	5.50+/-0.10	5.40+/-0.10	5.48+/-0.10	W₄	5.5+0.5
T	0.25+/-0.10	0.25+/-0.10	0.25+/-0.10		
K₀	0.80+/-0.10	1.36+/-0.10	1.86+/-0.10		
<i>Leader Min.</i>	390	390	390		
<i>Trailer Min.</i>	160	160	160		

Tape and Reel Diagram

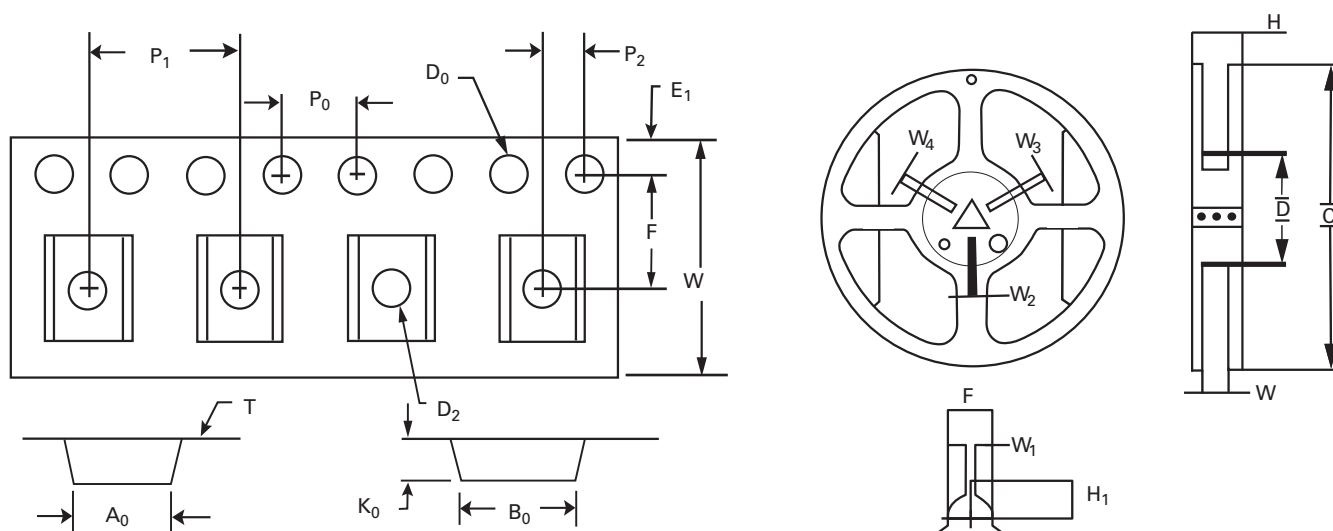



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331