



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**

### Typical Applications


The HMC441LH5 is a medium PA for:

- Telecom Infrastructure
- Military Radio, Radar & ECM
- Space Systems
- Test Instrumentation

### Features

- Gain: 5 dB
- Saturated Power: +21.5 dBm @ 25% PAE
- Single Positive Supply: +5V
- 50 Ohms Matched Input/Output
- Hermetic SMT Package, 25mm<sup>2</sup>
- Screening to MIL-PRF-38535 (Class B or S) Available

### Functional Diagram

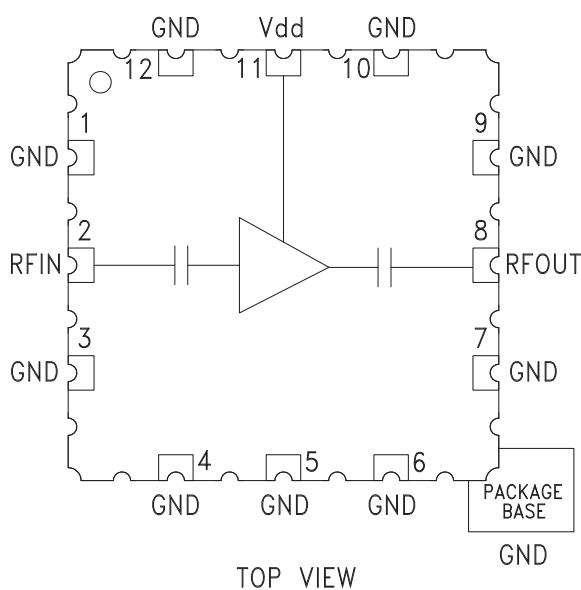

### General Description


The HMC441LH5 is a broadband 7 to 15.5 GHz GaAs PHEMT MMIC Medium Power Amplifier housed in a hermetic SMT leadless package. The amplifier provides 15 dB of gain and 21.5 dBm of saturated power at 25% PAE from a +5V supply. This 50 Ohm matched amplifier does not require any external components, and the RF I/Os are DC blocked, making it an ideal linear gain block or driver amplifier. The HMC441LH5 allows the use of surface mount manufacturing techniques and is suitable for high reliability military, industrial & space applications.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{dd} = 5V$


| Parameter                                | Min. | Typ.      | Max. | Min.       | Typ.  | Max. | Min.        | Typ.  | Max. | Min.        | Typ.  | Max. | Units |
|------------------------------------------|------|-----------|------|------------|-------|------|-------------|-------|------|-------------|-------|------|-------|
| Frequency Range                          |      | 7.0 - 8.0 |      | 8.0 - 13.0 |       |      | 13.0 - 14.0 |       |      | 14.0 - 15.5 |       |      | GHz   |
| Gain                                     | 11   | 14        |      | 13         | 16    |      | 12          | 15    |      | 10.5        | 13.5  |      | dB    |
| Gain Variation Over Temperature          |      | 0.015     | 0.02 |            | 0.015 | 0.02 |             | 0.015 | 0.02 |             | 0.015 | 0.02 | dB/°C |
| Input Return Loss                        |      | 11        |      | 13         |       |      | 10          |       |      | 8           |       |      | dB    |
| Output Return Loss                       |      | 10        |      | 15         |       |      | 14          |       |      | 12          |       |      | dB    |
| Output Power for 1 dB Compression (P1dB) | 15.5 | 18.5      |      | 17         | 20    |      | 16          | 19    |      | 16          | 19    |      | dBm   |
| Saturated Output Power (Psat)            |      | 20        |      | 21         |       |      | 21.5        |       |      | 21          |       |      | dBm   |
| Output Third Order Intercept (IP3)       |      | 30        |      | 32         |       |      | 32          |       |      | 32          |       |      | dBm   |
| Noise Figure                             |      | 5.0       |      | 4.75       |       |      | 4.75        |       |      | 5.0         |       |      | dB    |
| Supply Current (Idd)                     |      | 90        | 115  |            | 90    | 115  |             | 90    | 115  |             | 90    | 115  | mA    |

## GaAs PHEMT MMIC MEDIUM POWER AMPLIFIER, 7 - 15.5 GHz


**Broadband Gain & Return Loss**

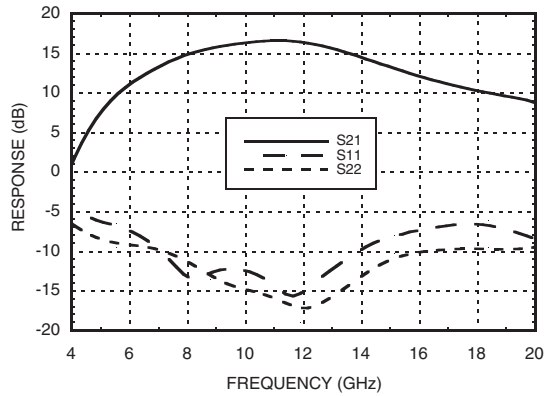


**Gain vs. Temperature**

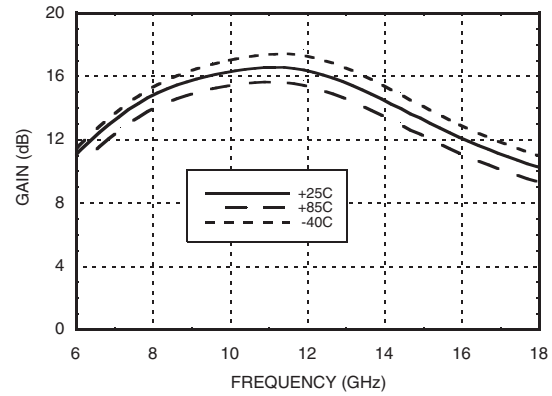


**Input Return Loss vs. Temperature**

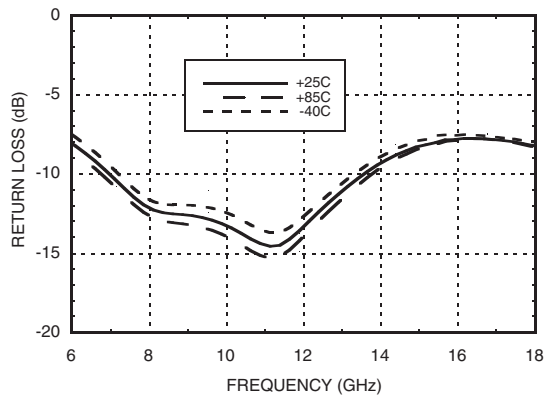


**Output Return Loss vs. Temperature**

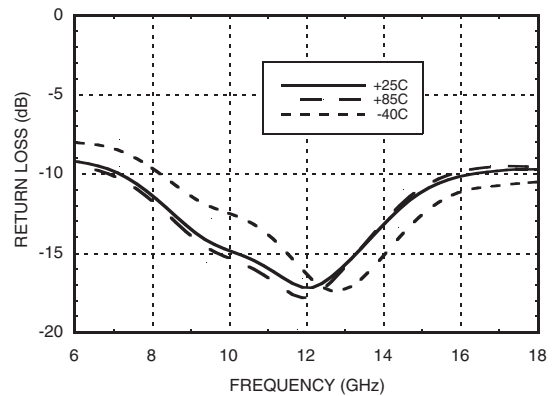

**P1dB vs. Temperature**

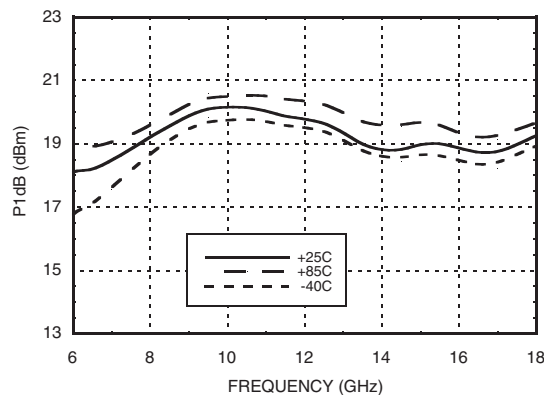


**Psat vs. Temperature**

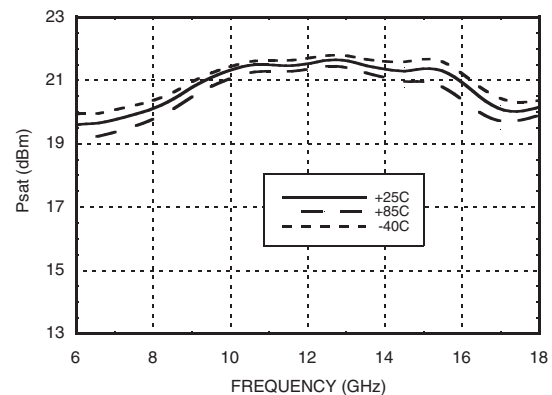


## GaAs PHEMT MMIC MEDIUM POWER AMPLIFIER, 7 - 15.5 GHz


**Power Compression @ 12 GHz**

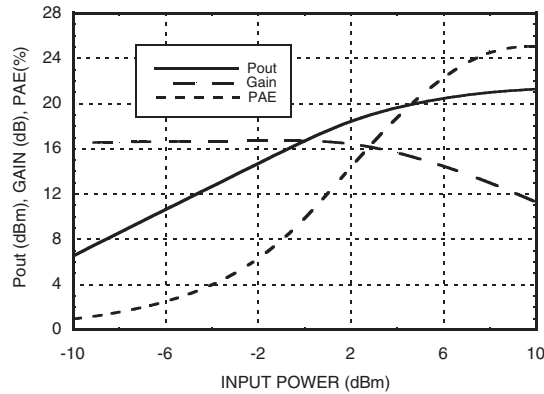


**Output IP3 vs. Temperature**

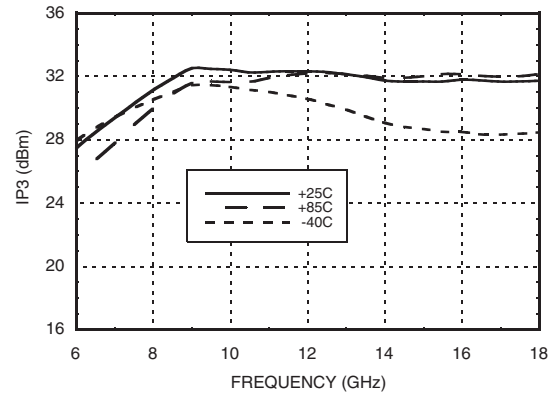


**Gain, Power & Output IP3  
vs. Supply Voltage @ 12 GHz**

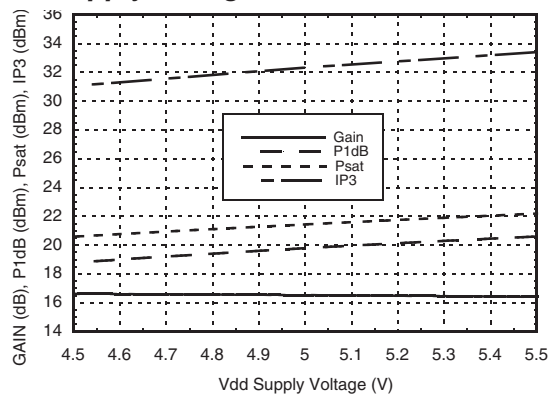

**Noise Figure vs. Temperature**

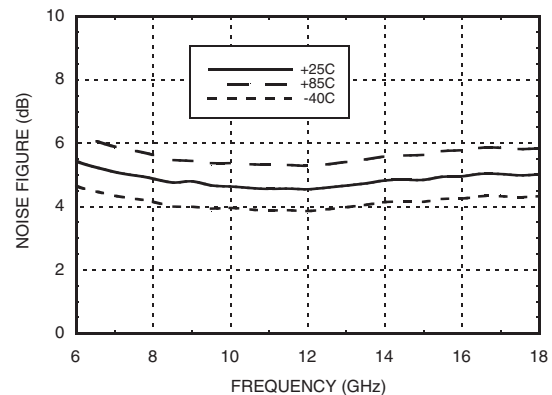

**Reverse Isolation vs. Temperature**

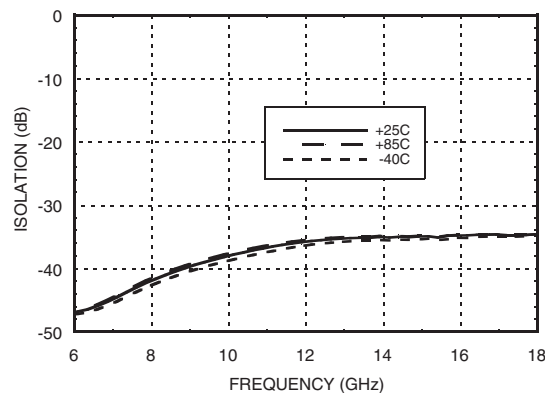

## GaAs PHEMT MMIC MEDIUM POWER AMPLIFIER, 7 - 15.5 GHz

### Absolute Maximum Ratings

|                                                                            |                |
|----------------------------------------------------------------------------|----------------|
| Drain Bias Voltage (Vdd)                                                   | +6 Vdc         |
| RF Input Power (RFIN)(Vdd = +5Vdc)                                         | +15 dBm        |
| Channel Temperature                                                        | 175 °C         |
| Continuous P <sub>diss</sub> (T = 85 °C)<br>(derate 8.4 mW/°C above 85 °C) | 0.76 W         |
| Thermal Resistance<br>(channel to ground paddle)                           | 118.8 °C/W     |
| Storage Temperature                                                        | -65 to +150 °C |
| Operating Temperature                                                      | -40 to +85 °C  |

### Typical Supply Current vs. Vdd

| Vdd (V) | Idd (mA) |
|---------|----------|
| +5.5    | 92       |
| +5.0    | 90       |
| +4.5    | 88       |


Note: Amplifier will operate over full voltage range shown above



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

11




### Outline Drawing

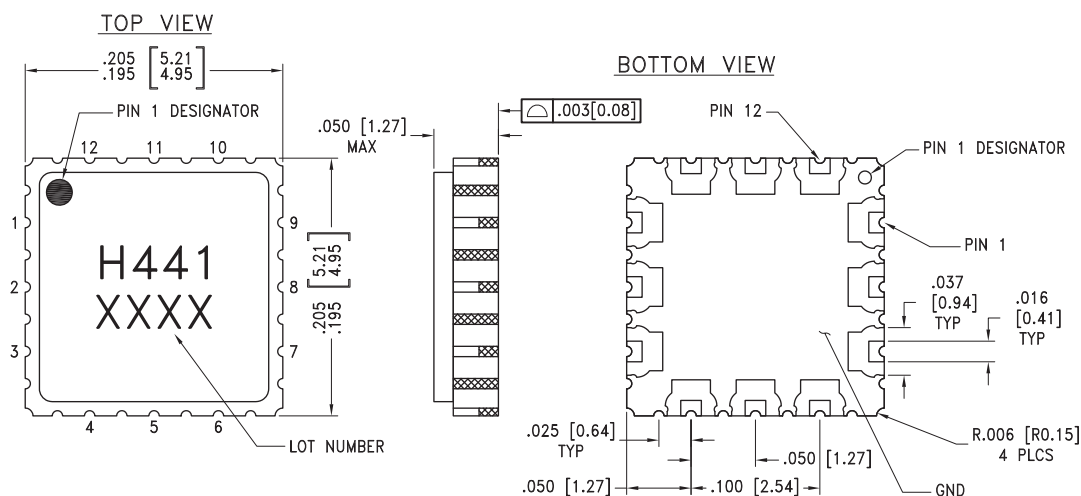

#### NOTES:


1. PACKAGE BODY MATERIAL: CERAMIC & KOVAR
2. LEAD AND GROUND PADDLE PLATING: GOLD 40 - 80 MICROINCHES.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
5. PAD BURR LENGTH 0.15mm MAX.  
PAD BURR HEIGHT 0.25mm MAX.
6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

### Pin Descriptions


| Pin Number        | Function | Description                                                                            | Interface Schematic                                                                 |
|-------------------|----------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1, 3-7, 9, 10, 12 | GND      | These pins and package bottom must be connected to RF/DC ground.                       |  |
| 2                 | RFIN     | This pin is AC coupled and matched to 50 Ohms.                                         |  |
| 8                 | RFOUT    | This pin is AC coupled and matched to 50 Ohms.                                         |  |
| 11                | Vdd      | Power Supply Voltage for the amplifier.<br>External bypass capacitors are recommended. |  |

### Application Circuit

| Component | Value    |
|-----------|----------|
| C1        | 100 pF   |
| C2        | 1,000 pF |
| C3        | 4.7 μF   |

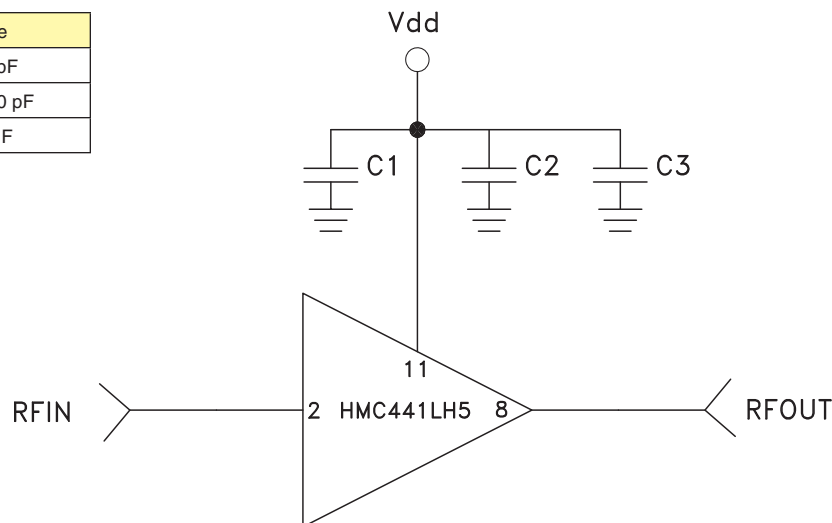

### Evaluation PCB

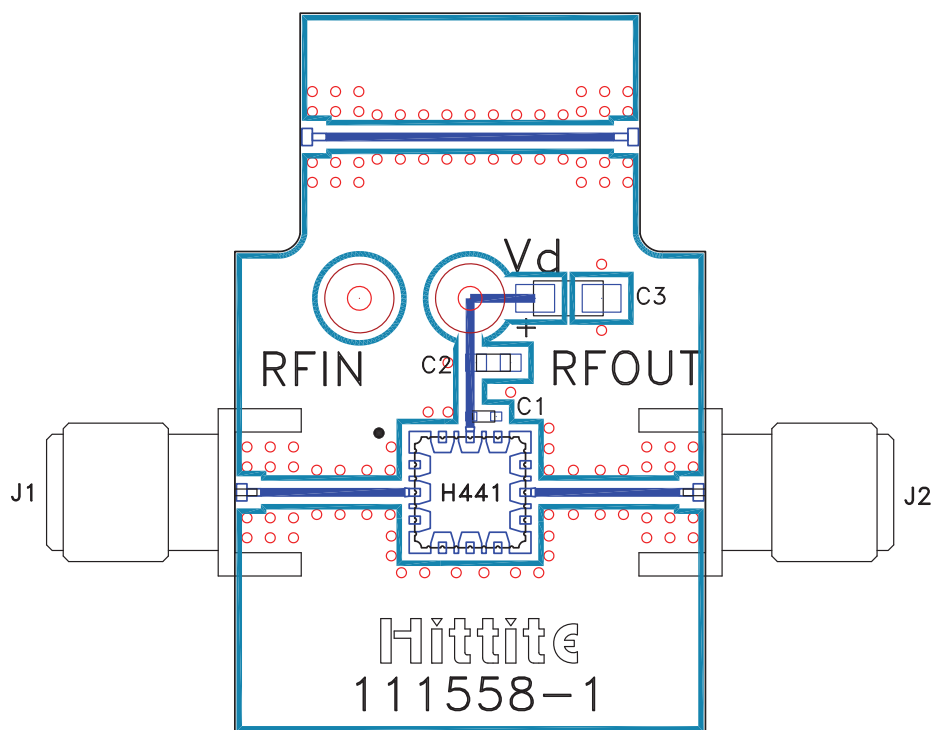

### List of Materials for Evaluation PCB 111560 <sup>[1]</sup>

| Item               | Description                     |
|--------------------|---------------------------------|
| J1 - J2            | PCB Mount SMA RF Connector, SRI |
| U1                 | HMC441LH5                       |
| C1                 | 100 pF Capacitor, 0402 Pkg.     |
| C2                 | 1,000 pF Capacitor, 0603 Pkg.   |
| C3                 | 4.7 $\mu$ F Capacitor, Tantalum |
| PCB <sup>[2]</sup> | 111558 Evaluation Board         |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331