


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0670689011](#)
Status: **Active**
Description: Universal Serial Bus (USB), Shielded I/O, Type B Receptacle, Right Angle with Straight Tabs, Color White, 0.76µm(30µ") Gold(Au) Plating, Tray Pack, Lead Free

Documents:
[3D Model](#) [Product Specification PS-67998-0000 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	I/O Connectors
Series	67068
Application	Wire-to-Board
Comments	Single
Component Type	Receptacle
Product Name	USB
Type	B
Physical	
Boot Color	N/A
Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Receptacle
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.110 In
PC Tail Length (mm)	2.80 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.063 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Pitch - Term. Interface (in)	0.098 In
Pitch - Term. Interface (mm)	2.50 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.90
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0°C to +50°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No
Wire Size AWG	N/A

Electrical	
Current - Maximum per Contact	1.5A
Shield Type	Full Shield

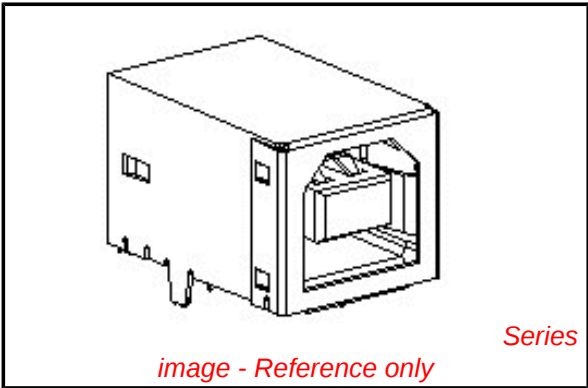

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status

China RoHS



Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[67068Series](#)

Mates With
USB Type B Plug

Shielded
Voltage - Maximum

Yes
30V (RMS)

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-67998-0000
SD-67068-003

This document was generated on 03/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

NOTES :

1. MATERIAL :

HOUSING : (a) HIGH TEMP. NYLON ,GLASS FIBER FILLED,UL94V-O, COLOR: BLACK,
(b) POLYESTER , GLASS FIBER FILLED,UL94V-O, COLOR: WHITE,

TERMINAL : PHOSPHOR BRONZE
METAL SHELL : COPPER ALLOY

2. PLATING :

TERMINAL :

CONTACT AREA : (a) GOLD FLASH.

(b) GLOD (Au), THICKNESS = 30 MICROINCH MINIMUM.
/0.76 MICROMETER MINIMUM.

SOLDER TAIL :

PURE TIN(Sn) THICKNESS= 75 MICROINCH MINIMUM .
/1.9 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.

METAL SHELL :

PURE TIN(Sn) , THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni) , THICKNESS= 50 MICROINCH MINIMUM.



/1.27 MICROMETER MINIMUM.

3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER

RECOMMENDED PCB THICKNESS : 1.60±0.05

4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

MOLEX ID OF MFG PLANT CODE

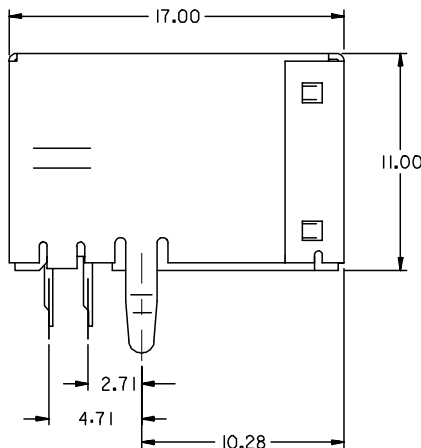

PART NUMBER LEGEND:

67068-

8 : BLACK HOUSING
9 : WHITE HOUSING

0 : TRAY PACKAGING
1 : TUBE PACKAGING

0

0 : GOLD FLASH
1 : 0.76 MICROMETER/30
MICROINCH GOLD

KINK TYPE BOARD LOCK

NEW RELEASE	
EC NO: SH2005-0142	DRWN: DAVID HU 2004/11/5
CHKD: HARVEY 2004/11/25	APPR: YIYAP 2004/11/25
REV	DESCRIPTION
A	

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
DAVID HU	2004/11/05
CHECKED BY	DATE
HARVEY	2004/11/05
APPROVED BY	DATE

MATERIAL NO.

SEE NOTES

SCALE
4:1

DESIGN UNITS
METRIC


DOCUMENT NO.
SD-67068-003

THIRD ANGLE
PROJECTION


TITLE
USB B TYPE CONNECTOR
KINK TYPE BOARD LOCK
(LEAD-FREE)

MOLEX INCORPORATED

SHEET NO.
1 OF 4

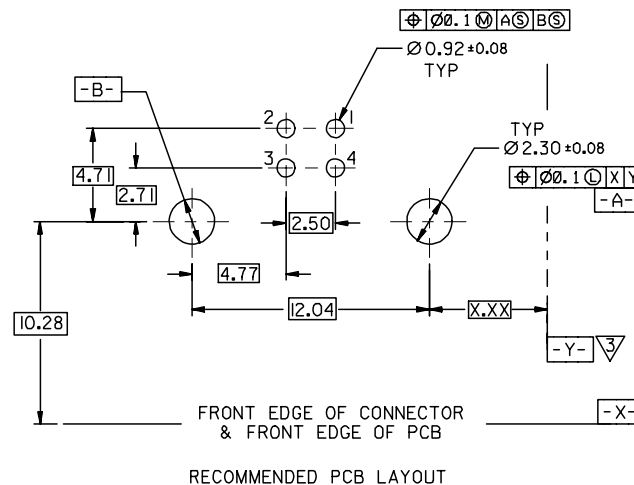

RECOMMENDED PCB LAYOUT

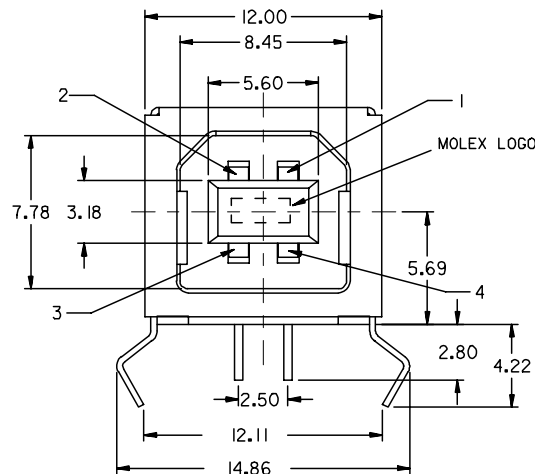



I. MATERIAL :
HOUSING : (a) HIGH TEMP. NYLON, GLASS FIBER FILLED,UL94V-0, COLOR: BLACK,
(b) POLYESTER , GLASS FIBER FILLED,UL94V-0, COLOR: WHITE,
TERMINAL : PHOSPHOR BRONZE
METAL SHELL : COPPER ALLOY

TERMINAL :
CONTACT AREA : (a) GOLD FLASH.
(b) GL0D (Au), THICKNESS = 30 MICROINCH MINIMUM.
/0.76 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (NI), THICKNESS= 50 MICROINCH MINIMUM.
METAL SHEET / 1.27 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

RECOMMENDED PCB THICKNESS : 1.60±0.05

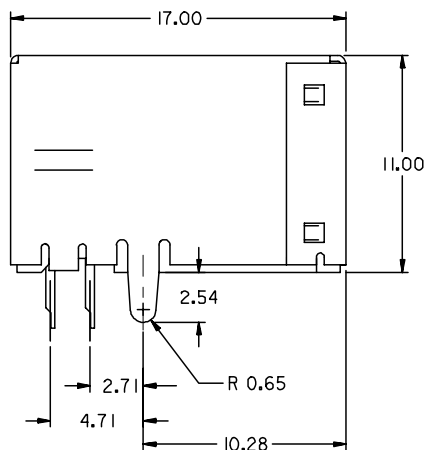



67068-


9 : WHITE HOUSING

1 : TUBE PACKAGING

STRAIGHT TAB

NEW RELEASE EC NO: SH2005-0142 DRWN: DAVID HU 2004/11/15 CHKD:HARVEY 2004/11/25 APPR:YIYAP 2004/11/25	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY DAVID HU	DATE 2004/11/05	TITLE USB B TYPE CONNECTOR WITH STRAIGHT TAB (LEAD-FREE)				
			4 PLACES	± ---	± ---	CHECKED BY	DATE 2004/11/05					
			3 PLACES	± ---	± ---	2 PLACES	± 0.25	± ---	2004/11/05	2004/11/05		
			1 PLACE	± 0.25	± ---	APPROVED BY		DATE	molex MOLEX INCORPORATED			
A	REV		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE NOTES		SD-67068-003		2			
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

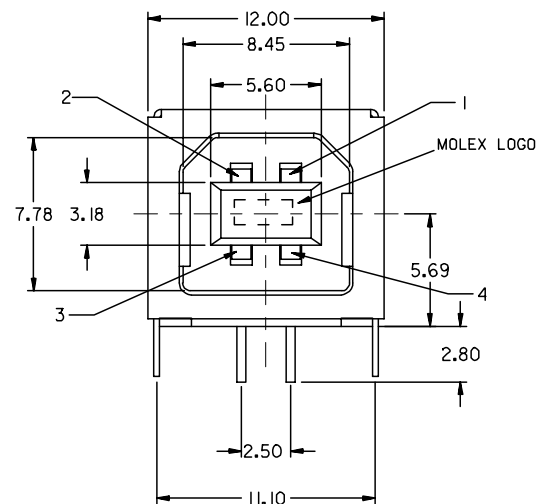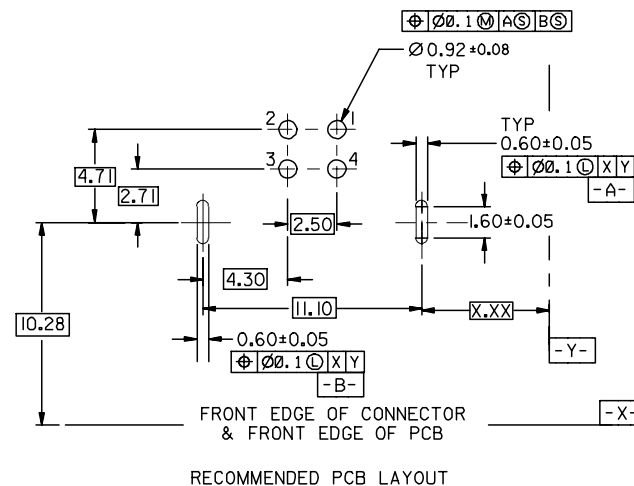

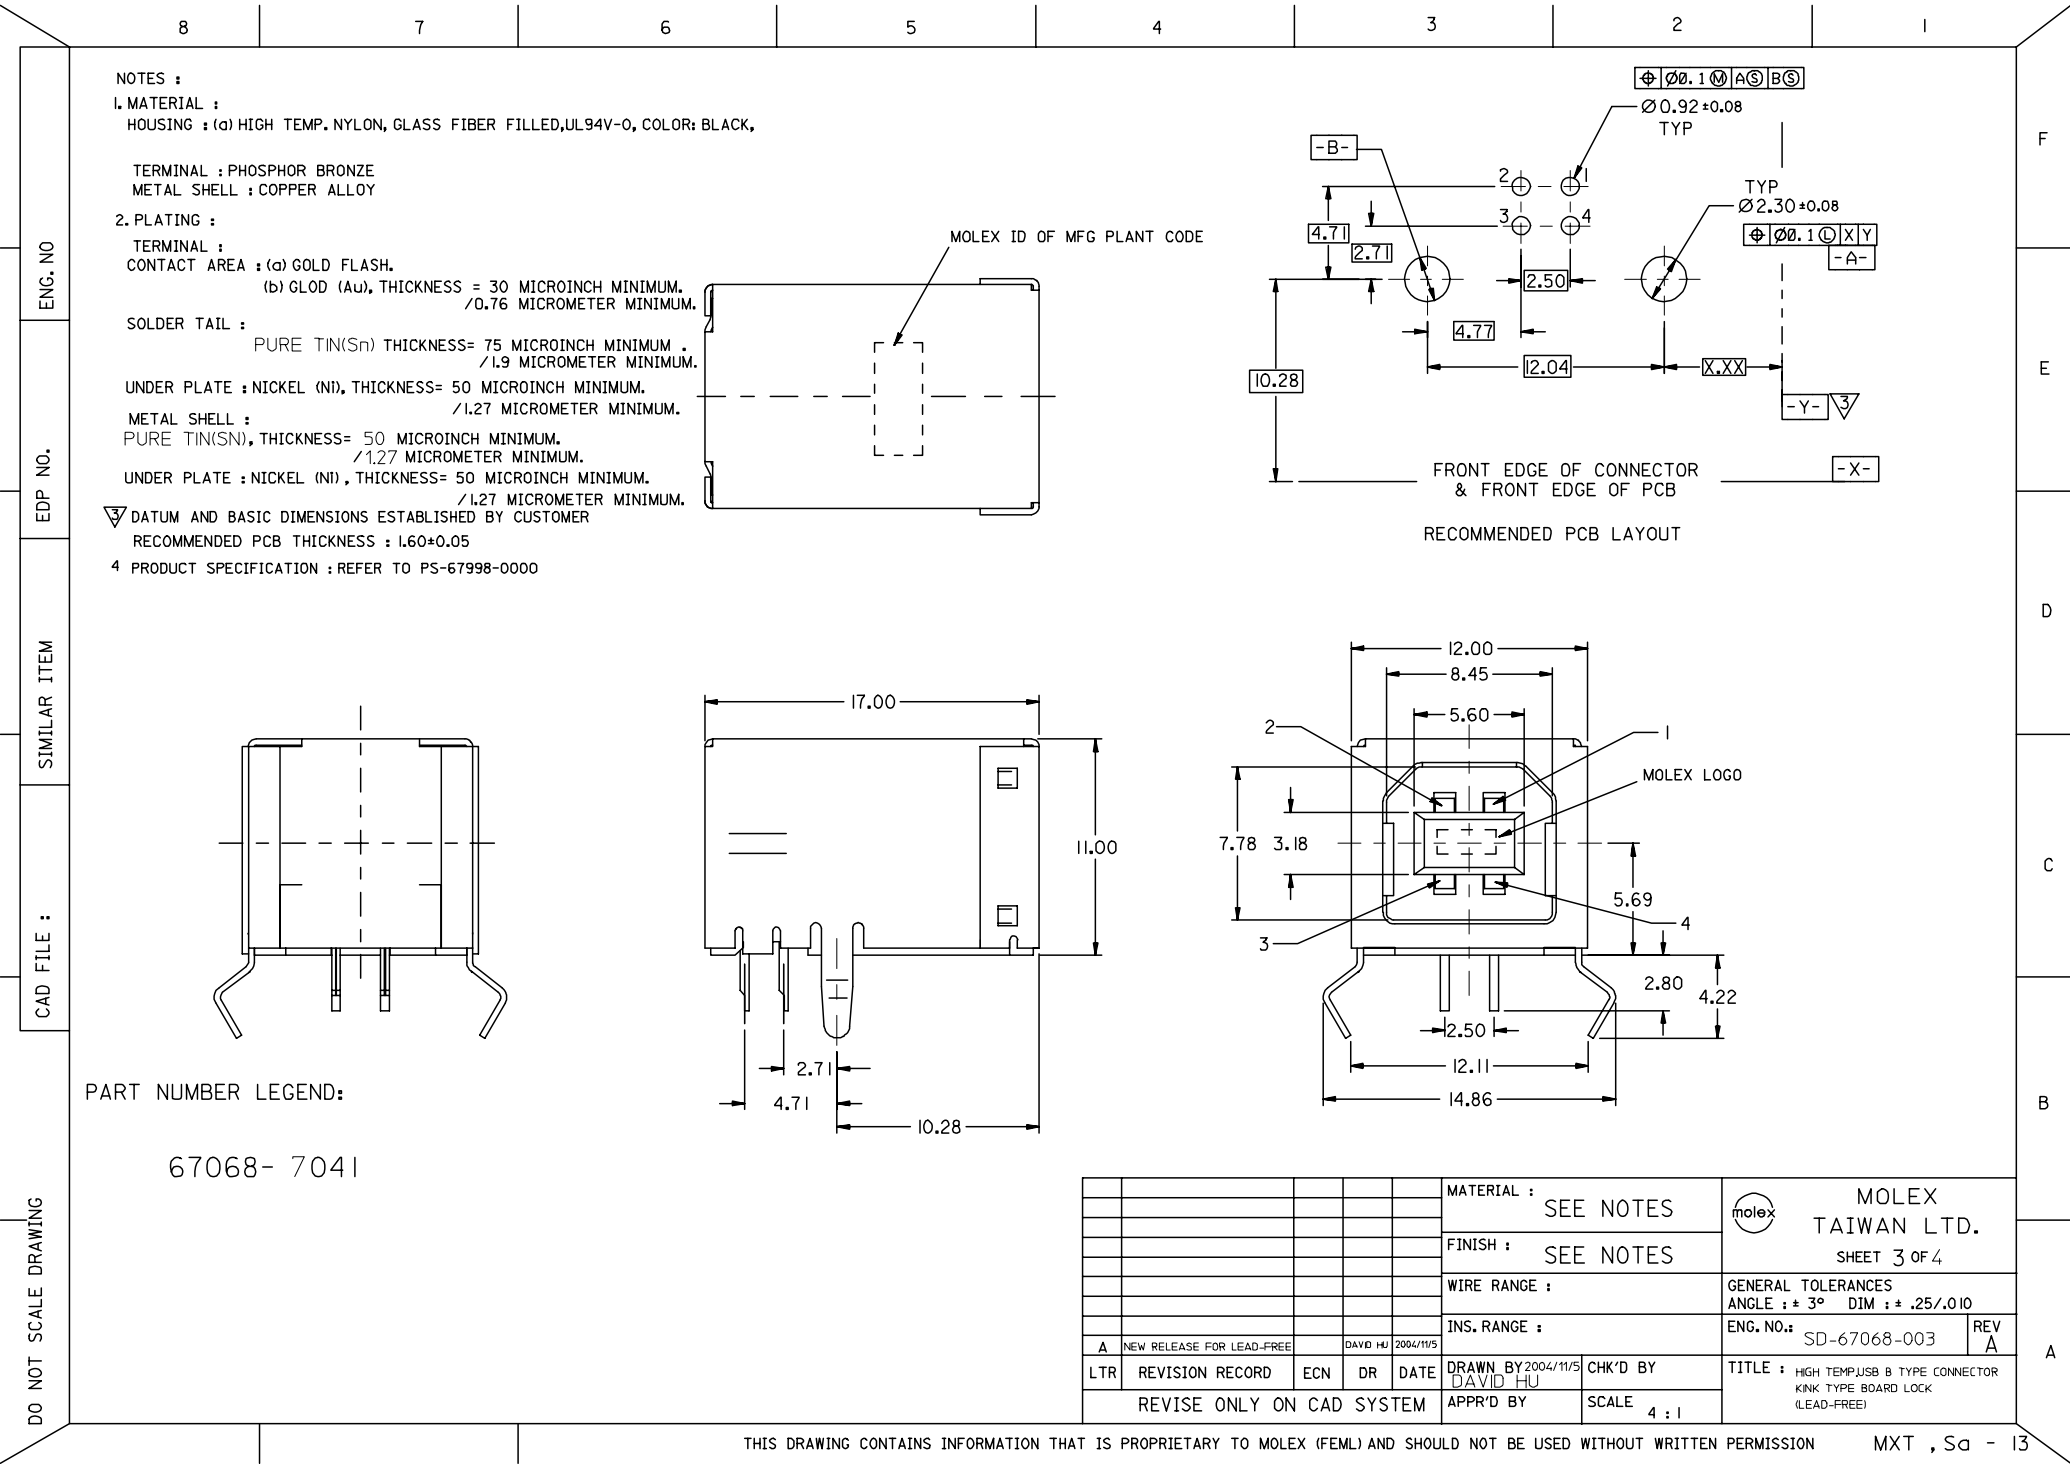

NOTES :
1. MATERIAL :
HOUSING : (a) HIGH TEMP. NYLON, GLASS FIBER FILLED, UL94V-0, COLOR: BLACK,

TERMINAL : PHOSPHOR BRONZE
METAL SHELL : COPPER ALLOY




2. PLATING :
TERMINAL :
CONTACT AREA : (a) GOLD FLASH.
(b) GLOD (Au), THICKNESS = 30 MICROINCH MINIMUM.
/0.76 MICROMETER MINIMUM.

SOLDER TAIL :
PURE TIN(Sn) THICKNESS= 75 MICROINCH MINIMUM .
/1.9 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

METAL SHELL :
PURE TIN(SN), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

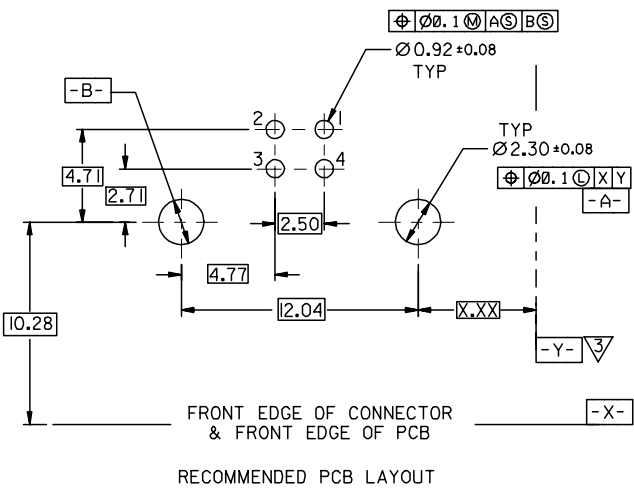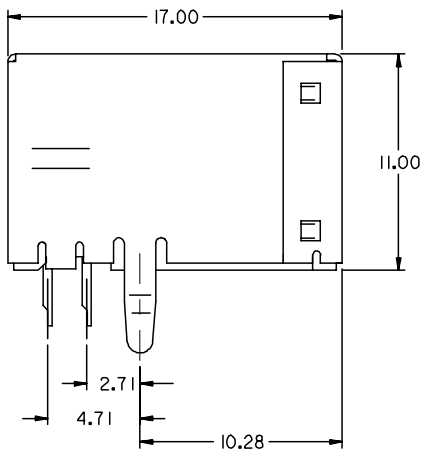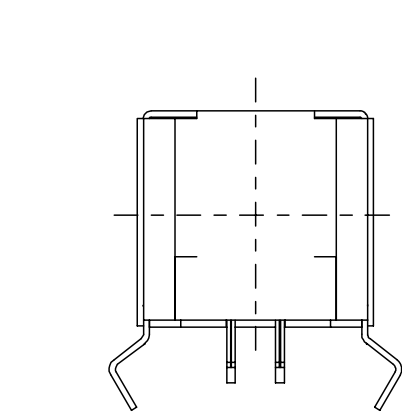

PART NUMBER LEGEND:


67068-7041

						MATERIAL : SEE NOTES		MOLEX TAIWAN LTD.	
						FINISH : SEE NOTES		SHEET 3 OF 4	
						WIRE RANGE :	GENERAL TOLERANCES ANGLE : ± 3° DIM : ± .25/.010		
						INS. RANGE :	ENG. NO.:		REV
A	NEW RELEASE FOR LEAD-FREE			DAVID HU	2004/11/5	SD-67068-003		A	
LTR	REVISION RECORD	ECN	DR	DATE	DRAWN BY 2004/11/5 DAVID HU	CHK'D BY	TITLE : HIGH TEMP./USB B TYPE CONNECTOR KINK TYPE BOARD LOCK (LEAD-FREE)		
REVISE ONLY ON CAD SYSTEM					APPR'D BY	SCALE	4 : 1		



DO NOT SCALE DRAWING

4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

RECOMMENDED PCB LAYOUT



67068- 7051

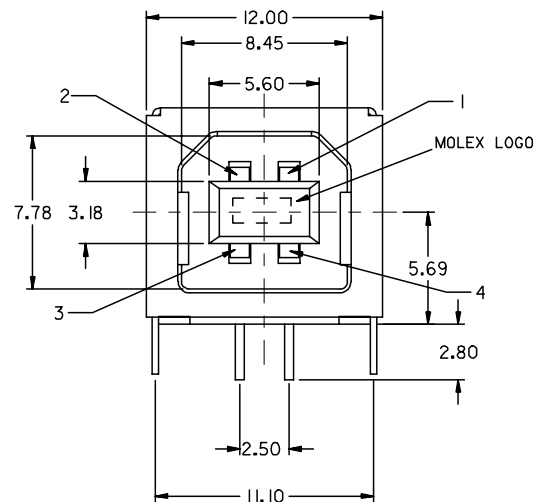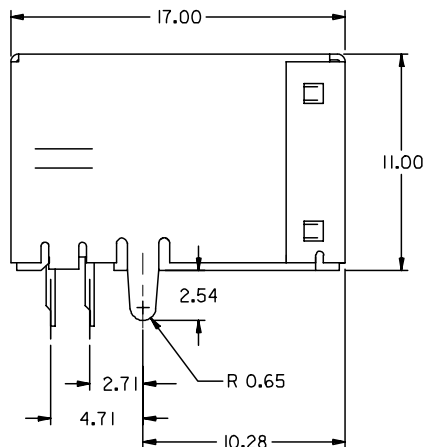

						MATERIAL :	SEE NOTES		 MOLEX TAIWAN LTD. SHEET 4 OF 4
						FINISH :	SEE NOTES		
						WIRE RANGE :			
						INS. RANGE :			
A	NEW RELEASE FOR LEAD-FREE			DAVID HU	2004/11/5	ENG. NO.:		SD-67068-003	REV A
LTR	REVISION RECORD		ECN	DR	DATE	DRAWN BY 2004/11/5 DAVID HU	CHK'D BY		TITLE : HIGH TEMP./USB B TYPE CONNECTOR WITH STRAIGHT TAB (LEAD-FREE)
REVISE ONLY ON CAD SYSTEM						APPR'D BY	SCALE 4 : 1		



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331