

# AS39029 QPL LISTED CONTACTS

FOR MIL/AERO APPLICATIONS  
WITH PATENTED REVERSED CLIP  
TECHNOLOGY



NEW  
QPL PARTS



preci-dip

swiss world connects

# REVERSED CLIP SOCKET CONTACT TECHNOLOGY


## CONTACT DESIGN

The contact consists of three parts, separately manufactured and made of different base materials. This design allows to optimise the performance and to select the most appropriate production process individually:

- Contact body made of machined brass
- Beryllium-copper clip insert achieved by precision stamping process
- Protection hood made of deep-drawn stainless steel

Separate electroplating processes of body and clip allow the best cost-performance ratio (localized finish). The assembly of the three parts is then carried out on dedicated, fully automatic assembly lines.

Reversed clip contacts are presently available in size 12, 16, 20 and 22. This proprietary technology developed by PRECI-DIP, is protected by international patents.

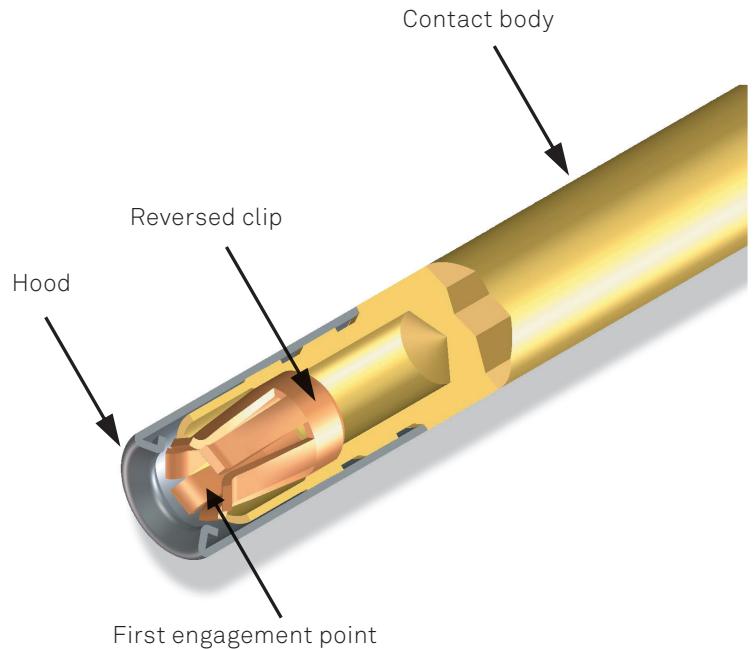

## ADVANTAGES AND CHARACTERISTICS

In comparison with the alternative slotted contact body design, the reversed clip concept has several advantages:

- Smaller difference between insertion and extraction forces
- Reduced dispersion of the force values
- Higher redundancy of the contact points, thanks to 6 or 8 contact fingers

We are also manufacturing the corresponding precision-machined pin contacts.

These contacts have successfully passed all the qualification tests according to AS39029 and are QPL listed.

## TECHNICAL SPECIFICATIONS

|                   |                                                                                                                                |                                                                 |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| • Operating temp. | -65°C to +125°C for Class A contacts                                                                                           |                                                                 |
|                   | -65°C to +200°C for Class B contacts                                                                                           |                                                                 |
| • Material        | Pin contact:                                                                                                                   | Type A : copper alloy<br>Machined brass acc. to ASTM B121/B121M |
|                   | Socket contact:                                                                                                                | Type A : copper alloy<br>Machined brass acc. to ASTM B121/B121M |
|                   | Reversed clip:                                                                                                                 | BeCu acc. to ASTM B194                                          |
|                   | Hood:                                                                                                                          | Corrosion-resistant steel                                       |
| • Finish          | Gold plated (min. 1.27µm in the contact area) acc. to ASTM B488, Type II, Code C, over 2.5 µm Ni acc. to AMS-QQ-N-290, Class 2 |                                                                 |
|                   | Silver plated acc. to ASTM B700, over 2.5 µm Ni acc. to AMS-QQ-N-290, Class 2 (M39029/29-213 only)                             |                                                                 |


## CUSTOMIZED PRODUCTS

We also provide cost effective customized versions, derived from the MIL QPL contacts, for heavy duty applications:


- Solder-cup or PC tail termination
- No color coding
- Other finish, Gold or Nickel only plating
- Hoodless version

Please consult for product availability.

PC Tail



Solder cup



Hoodless





# CONTACT TECHNOLOGY

## MIL CONTACTS

### QUALIFIED PRODUCT LIST : PRECI-DIP PART NUMBERS

#### SOCKET CONTACTS

| CONNECTOR TYPE ACC. TO           | MIL P/N         | PRECI-DIP P/N     | MATING END SIZE | WIRE BARREL SIZE | TYPE | CLASS |
|----------------------------------|-----------------|-------------------|-----------------|------------------|------|-------|
| MIL-DTL-26482, Series 2          |                 |                   |                 |                  |      |       |
| AS81703, Series 3                | M39029/5-115    | 83181-7Q4-7110-B1 | 20              | 20               | A    | B     |
| MIL-DTL-83723, Series 1, 3       | M39029/5-116    | 83191-7Q4-7210-B1 | 16              | 16               | A    | B     |
| MIL-DTL-83733                    | M39029/5-118    | 83151-7Q4-7310-B1 | 12              | 12               | A    | B     |
| MIL-DTL-12883/40, /41, /47, /48  |                 |                   |                 |                  |      |       |
| AS81714, Series II               | M39029/22-191   | 83211-7Q4-7010-B1 | 22              | 22               | A    | B     |
| MIL-C-81511, Series 3, 4 Class L | M39029/22-192   | 83231-7Q4-7110-B1 | 20              | 20               | A    | B     |
| MIL-DTL-26500                    |                 |                   |                 |                  |      |       |
| MIL-DTL-26518, Class R           | M39029/32-248   | 83171-7Q4-7210-B1 | 16              | 16               | A    | B     |
| MIL-C-38300                      |                 |                   |                 |                  |      |       |
| MIL-DTL-26482, Series 1          | M39029/32-259   | 83161-7Q4-7110-B1 | 20              | 20               | A    | A     |
| MIL-DTL-38999, Series I, III, IV | M39029/56-348   | 83011-1P4-7010-B1 | 22              | 22D              | A    | B     |
|                                  | M39029/56-351   | 83021-1P4-7110-B1 | 20              | 20               | A    | B     |
|                                  | M39029/56-352   | 83031-1P4-7210-B1 | 16              | 16               | A    | B     |
|                                  | M39029/56-353   | 83041-1P4-7310-B1 | 12              | 12               | A    | B     |
| MIL-DTL-38999, Series II         | M39029/57-354   | 83101-7Q4-7010-B1 | 22              | 22D              | A    | B     |
| MIL-DTL-24308                    | M39029/57-357   | 83341-7Q4-7110-B1 | 20              | 20               | A    | B     |
| MIL-DTL-55302/68, /71, /75       | M39029/57-358   | 83361-7Q4-7210-B1 | 16              | 16               | A    | B     |
| MIL-DTL-83733                    |                 |                   |                 |                  |      |       |
| MIL-DTL-24308                    | M39029/63-368 * | 83121-7Q4-6110-01 | 20              | 20               | A    | A     |
| MIL-DTL-12883/44, /45, /46       | M39029/101-552  | 83431-7Q4-7010-B1 | 22              | 22               | A    | A     |
|                                  | M39029/101-553  | 83441-7Q4-7110-B1 | 20              | 20               | A    | A     |

Listed part numbers are of localized finish.

\* Eagle Grip Clip (hoodless)

#### PIN CONTACTS

| CONNECTOR TYPE ACC. TO               | MIL P/N       | PRECI-DIP P/N | MATING END SIZE | WIRE BARREL SIZE | TYPE | CLASS |
|--------------------------------------|---------------|---------------|-----------------|------------------|------|-------|
| AS81714, Series I                    | M39029/1-100  | 82151-7Q4-01  | 16              | 22               | A    | B     |
|                                      | M39029/1-101  | 82161-7Q4-01  | 16              | 20               | A    | B     |
|                                      | M39029/1-102  | 82171-7Q4-01  | 14              | 16               | A    | B     |
|                                      | M39029/1-103  | 82181-7Q4-01  | 12              | 12               | A    | B     |
| MIL-DTL-26482, Series 2              |               |               |                 |                  |      |       |
| AS81703, Series 3                    | M39029/4-110  | 82071-7Q4-01  | 20              | 20               | A    | B     |
| MIL-DTL-83723, Series 1, 3           | M39029/4-111  | 82081-7Q4-01  | 16              | 16               | A    | B     |
| MIL-DTL-83733                        | M39029/4-113  | 82091-7Q4-01  | 12              | 12               | A    | B     |
| AS50151, Series 3450                 | M39029/29-212 | 82111-7Q4-01  | 16              | 16               | A    | B     |
| MIL-DTL-83723, Series 2              | M39029/29-213 | 82121-6Q0-01  | 12              | 12               | A    | B     |
| MIL-DTL-26500                        |               |               |                 |                  |      |       |
| MIL-DTL-26518, Class R               | M39029/31-627 | 82141-7Q4-01  | 20              | 20               | A    | B     |
| MIL-C-38300                          | M39029/31-229 | 82101-7Q4-01  | 16              | 16               | A    | B     |
| MIL-DTL-26482, Series 1              | M39029/31-240 | 82051-7Q4-01  | 20              | 20               | A    | A     |
| AS81703, Series 2                    | M39029/31-228 | 82131-7Q4-01  | 16              | 16               | A    | A     |
| MIL-DTL-38999, Series I, II, III, IV | M39029/58-360 | 82011-7Q4-01  | 22              | 22D              | A    | B     |
| MIL-DTL-24308                        | M39029/58-363 | 82021-7Q4-01  | 20              | 20               | A    | B     |
| MIL-DTL-55302/69                     | M39029/58-364 | 82031-7Q4-01  | 16              | 16               | A    | B     |
| MIL-DTL-83733                        | M39029/58-365 | 82041-7Q4-01  | 12              | 12               | A    | B     |
| MIL-DTL-24308                        | M39029/64-369 | 82061-7Q4-01  | 20              | 20               | A    | A     |

Listed part numbers are of localized finish (except M39029/29-213). For overall plating please contact us.

# ENJOY THE BENEFITS

---

## HEADED FOR SUCCESS

Awards from prestigious institutions and customers. Major certifications. World-wide recognition. For ongoing innovation, perfect teamwork, environmental responsibility as well as entrepreneurial excellence and sustained growth. In short, for Swiss quality.

- Complete range of highly reliable interconnect components
- Diverse fields of application
- Effective management system
- In-house manufacturing –from raw material to finished product
- Highly skilled and motivated workforce
- Strong customer support
- Custom design
- Competitive pricing, flexibility and Swiss quality
- Worldwide presence
- Prestigious client base

---

## AROUND THE WORLD

More than 100 Distributors around the world distribute PRECI-DIP products across the five continents.



**[www.precidip.com](http://www.precidip.com)**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331