

DESC APPROVED LOW DROPOUT NEGATIVE



Three Terminal, Fixed Voltage,
Low Dropout Negative Voltage Regulator
In Hermetic Packages

FEATURES

- Approved To DESC Standardized Military Drawings
- Low Dropout Voltage, 0.6 V @ $I_o = 1\text{ A}$
- Output Current in Excess of 1 A [LCC 20 (N2) package limited to 0.3A]
- Reverse Battery Protection
- Internal Short Circuit Protection
- Isolated and Non-Isolated Hermetic Package Types
- Output Voltages: - 5V, -5.2V, -12V, & -15V

13

DESCRIPTION

The OM2990 series of fixed voltage regulators are designed to provide up to 1.5A with high efficiency. It has the ability to source 1A of output current with a typical dropout voltage of 0.6V and a maximum of 1V over the entire operating temperature range. It is supplied in hermetic packages and is ideally suited for all applications where small size and high reliability are required.

ABSOLUTE MAXIMUM RATINGS, $T_c = 25^\circ\text{C}$

| | |
|---|------------------------------|
| Input Voltage | -26 V to +0.3V |
| Output Voltage | -5V, -5.2 V, -12 V, -15 V dc |
| Operating Junction Temperature Range | - 55°C to + 125°C |
| Storage Temperature Range | - 65°C to + 150°C |
| Lead Temperature (Soldering 10 seconds) | 300°C |
| Thermal Resistance: Junction to Case | |
| Case 2, LCC20 | 15.5°C/W |
| Case U&M, TO-257 (isolated) & SMD-3 | 3.8°C/W |
| Case T&N, TO-257 (non-isolated) & SMD-1 | 3.0°C/W |
| Case Y, TO-3 | 2.7°C/W |
| Maximum Output Current | |
| Case 2 | 0.3A |
| Case U&M | 1.2A |
| Case T, N & Y | 1.5A |

| APPROVED DESC DRAWING | OMNIREL P/N |
|-----------------------|------------------|
| 5962-9571101MUA | OM2990 - 5 STM |
| 5962-9571002MUA | OM2990 - 5.2 STM |
| 5962-9571001MUA | OM2990 - 12 STM |

ELECTRICAL CHARACTERISTICS, OM2990-5NK, NM, NT (-5 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -10V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|-------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -5.10 | -4.90 | V |
| | | | 2 | -5.25 | -4.75 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 5 | mA |
| | | | 2 | | 12 | |
| | | | 1,2 | I _I = 1.0 A, V _{IN} = -5 V | 50 | |
| Line Regulation | V _{RLN} | -6 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±40 | mV |
| | | | 2 | | ±50 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±50 | mV |
| | | | 2 | | ±100 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1.0 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 750 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | 1.5 | | A |
| | | | 2 | 1.3 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.5 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 50 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-12NK, NM, NT (-12 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -17V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|--------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -12.24 | -11.76 | V |
| | | | 2 | -12.60 | -11.40 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 5 | mA |
| | | | 2 | | 12 | |
| | | | 1,2 | I _I = 1 A, V _{IN} = -12 V | 50 | |
| Line Regulation | V _{RLN} | -13 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±65 | mV |
| | | | 2 | | ±80 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±80 | mV |
| | | | 2 | | ±120 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1500 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | .90 | | A |
| | | | 2 | .75 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short

ELECTRICAL CHARACTERISTICS, OM2990-15NK, NM, NT (-15 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -20V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|--------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -15.30 | -14.70 | V |
| | | | 2 | -15.75 | -14.25 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 15 | mA |
| | | | 2 | | 20 | |
| | | | 1,2 | I _I = 1.0 A, V _{IN} = -15 V | 50 | |
| Line Regulation | V _{RLN} | -16 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±75 | mV |
| | | | 2 | | ±120 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±120 | mV |
| | | | 2 | | ±190 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1.0 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1800 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | .75 | | A |
| | | | 2 | .62 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5SM, ST (-5 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -10V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|---|------------------|--|--------|----------------|----------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 2 | -5.10 -5.25 | -4.90 -4.75 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 5 12 | mA |
| | | I _O = 1.0A, V _{IN} = -5 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -6 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±45 ±55 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±70 ±110 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1.0 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 750 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1,2 | 1.27 | | A |
| Maximum Output Current | I _{MAX} | | 1 | 1.27 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 50 | | dB |
| Notes: 1. T _a = 25°C. 2. Over full operating temperature range. 3. Guaranteed, not tested. | | | | | | |

ELECTRICAL CHARACTERISTICS, OM2990-12SM, ST (-12 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -17V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|--|------------------|--|--------|------------------|------------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0A | 1 2 | -12.24 -12.60 | -11.76 -11.40 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 5 12 | mA |
| | | I _O = 1A, V _{IN} = -12 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -13 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±65 ±80 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±80 ±120 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1500 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1,2 | .75 | | A |
| Maximum Output Current | I _{MAX} | | 1 4 | 1.18 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |
| Notes: 1. T _a = 25°C. 2. Over full operating temperature range. 3. Guaranteed, not tested. 4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level. | | | | | | |

ELECTRICAL CHARACTERISTICS, OM2990-15SM, ST (-15 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -20V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|--|------------------|--|--------|------------------|------------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 2 | -15.30 -15.75 | -14.70 -14.25 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 15 20 | mA |
| | | I _O = 1.0A, V _{IN} = -15 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -16 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±75 ±120 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±120 ±190 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1.0 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1800 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 2 | .60 .50 | | A |
| Maximum Output Current | I _{MAX} | | 1 4 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |
| Notes: 1. T _a = 25°C. 2. Over full operating temperature range. 3. Guaranteed, not tested. 4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level. | | | | | | |

ELECTRICAL CHARACTERISTICS, OM2990-5N2 (-5 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -10V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -5.10 | -4.90 | V |
| | | | 2 | -5.25 | -4.75 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -5 \text{ V}$ $-6 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 55 | |
| | | | 1 | | ± 45 | m V |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 60 | |
| | | | 1 | | ± 80 | m V |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 800 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 300 | | m A |
| | | | 2 | 250 | | |
| Maximum Output Current | I_{MAX} | | 1 | 300 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 1 | 50 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

13

ELECTRICAL CHARACTERISTICS, OM2990-12N2 (-12 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -17V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|--------|-----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -12.24 | -11.76 | V |
| | | | 2 | -12.60 | -11.40 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -12 \text{ V}$ $-13 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 60 | |
| | | | 1 | | ± 75 | m V |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 110 | |
| | | | 1 | | ± 120 | m V |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 1650 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 200 | | m A |
| | | | 2 | 175 | | |
| Maximum Output Current | I_{MAX} | | 1 | 280 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 4 | | | |
| | | | 1 | 42 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-15 N2 (-15 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -20V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|--------|-----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -15.30 | -14.70 | V |
| | | | 2 | -15.75 | -14.25 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 20 | m A |
| | | | 2 | | 25 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -15 \text{ V}$ $-16 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 60 | |
| | | | 1 | | ± 85 | m V |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 130 | |
| | | | 1 | | ± 135 | m V |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 1900 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 150 | | m A |
| | | | 2 | 140 | | |
| Maximum Output Current | I_{MAX} | | 1 | 280 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 4 | | | |
| | | | 1 | 42 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5.2NK, NM, NT (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_O \leq 1.0\text{ A}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_O \leq 1.0\text{ A}$ | 1 | | 5 | m A |
| | | | 2 | | 12 | |
| | | | 1,2 | | 50 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 40 | m V |
| | | | 2 | | ± 50 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 1 | | ± 50 | m V |
| | | | 2 | | ± 100 | |
| Dropout Voltage | V_{DO} | $I_O = 0.1\text{ A}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_O = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 750 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 1.5 | | A |
| | | | 2 | 1.3 | | |
| Maximum Output Current | I_{MAX} | | 1 | 1.5 | | A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2SM, ST (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_O \leq 1.0\text{ A}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_O \leq 1.0\text{ A}$ | 1 | | 5 | m A |
| | | | 2 | | 12 | |
| | | | 1,2 | | 50 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 45 | m V |
| | | | 2 | | ± 55 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 1 | | ± 70 | m V |
| | | | 2 | | ± 110 | |
| Dropout Voltage | V_{DO} | $I_O = 0.1\text{ A}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_O = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 750 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1,2 | 1.27 | | A |
| | | | | | | |
| Maximum Output Current | I_{MAX} | | 1 | 1.27 | | A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |


Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2N2 (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).


| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_O \leq 300\text{ mA}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_O \leq 300\text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| | | | 1,2 | | 55 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 45 | m V |
| | | | 2 | | ± 60 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 300\text{ mA}$ | 1 | | ± 80 | m V |
| | | | 2 | | ± 120 | |
| Dropout Voltage | V_{DO} | $I_O = 100\text{ mA}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_O = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 800 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 300 | | m A |
| | | | 2 | 250 | | |
| Maximum Output Current | I_{MAX} | | 1 | 300 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

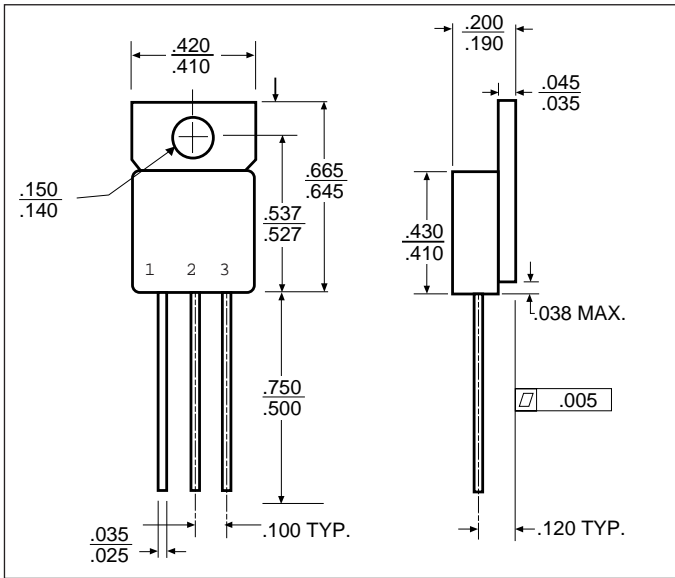


TO-257AA


| | |
|----------------|----------------|
| OM2990STM | OM2990NTM |
| Isolated | Non-Isolated |
| Front View | Front View |
| Pin 1 - Ground | Pin 1 - Ground |
| Pin 2 - Input | Pin 2 - Input |
| Pin 3 - Output | Pin 3 - Output |
| Tab - Isolated | Tab - Input |

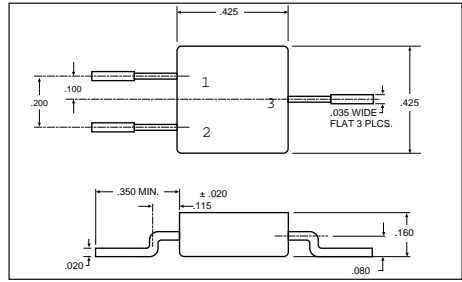


SMD-3 OM2990SMM
Front View
Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input
Case - Isolated

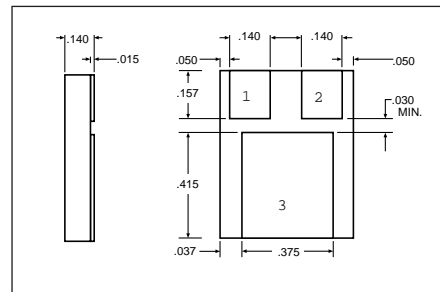

SMD 1 OM2990NMM
"N" PACKAGE Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input

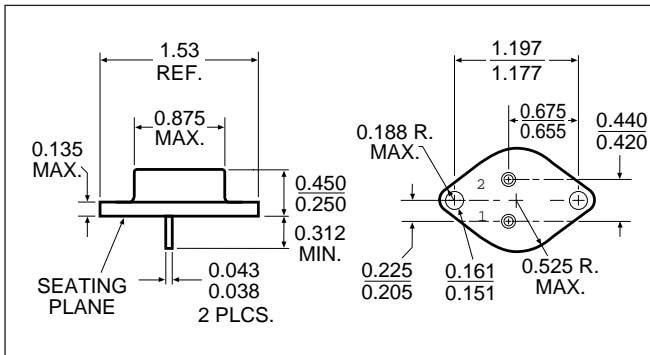

TO-204AA (TO-3) OM2990NKM
Pin 1 - Ground
Pin 2 - Output

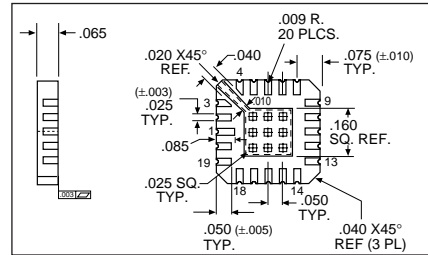

LCC 20 OM2990N2M

| | |
|--------------------------------|-------------------------|
| Pin 1 NC | Pin 11 V _{OUT} |
| Pin 2 NC | Pin 12 V _{OUT} |
| Pin 3 NC | Pin 13 NC |
| Pin 4 NC | Pin 14 NC |
| Pin 5 NC | Pin 15 V _{IN} |
| Pin 6 Ground | Pin 16 V _{IN} |
| Pin 7 NC | Pin 17 V _{IN} |
| Pin 8 NC | Pin 18 NC |
| Pin 9 V _{OUT} (Sense) | Pin 19 NC |



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331