

## Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE Professional (VIP) board for the ROC800 controller

### Product Features

- These system-specific interface modules for the ROC800 controller are used in combination with the relevant system cables
- Interface from field wiring to ROC800 controller
- Compact design reduces space requirements in the control cabinet
- Field side I/O marking clearly identified when device is mounted.
- Integrated ZB marker provides per-channel labeling
- Rugged metal mounting foot allows easy DIN rail installation and removal.



### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 1 pc          |
| Weight per Piece (excluding packing) | 100.0 g       |
| Country of origin                    | United States |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 36.8 mm |
| Height | 72.1 mm |
| Depth  | 46.6 mm |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

## Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

### Technical data

#### General

|                                 |              |
|---------------------------------|--------------|
| Max. perm. operating voltage    | 60 V AC/DC   |
| Max. perm. current (per branch) | 1 A          |
| Number of positions             | 10           |
| Status display                  | No           |
| Mounting position               | any          |
| Standards/regulations           | IEC 60664    |
|                                 | DIN EN 50178 |
|                                 | IEC 62103    |
| Degree of pollution             | 2            |
| Overvoltage category            | II           |

#### Connection data for connection 1

|                                  |  |
|----------------------------------|--|
| Connection name                  | Field level                                  |
| Connection in acc. with standard | IEC / EN                                     |
| Connection method                | Push-in connection                           |
| Stripping length                 | 8 mm   |
| Conductor cross section solid    | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 14                                    |
| Number of positions              | 10   |

#### Connection data for connection 2

|                       |                             |
|-----------------------|-----------------------------|
| Connection name       | Controller level            |
| Connection method     | IDC/FLK pin strip (2.54 mm) |
| Number of connections | 1                           |
| Number of positions   | 10                          |
| Pitch                 | 2.54 mm                     |

#### Supported controller

|                     |                |
|---------------------|----------------|
| Controller          | Emerson ROC800 |
| - suitable I/O card | ROC800 AI-12   |

#### Standards and Regulations

|                       |              |
|-----------------------|--------------|
| Standards/regulations | IEC 60664    |
|                       | DIN EN 50178 |
|                       | IEC 62103    |
| Degree of pollution   | 2            |
| Overvoltage category  | II           |

## Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11     | 39121421 |
| UNSPSC 12.01  | 39121421 |
| UNSPSC 13.2   | 39121421 |

### Approvals

#### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

# Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

## Approvals

|                                |       |
|--------------------------------|-------|
| UL Recognized                  |       |
| mm <sup>2</sup> /AWG/kcmil     | 26-14 |
| Nominal current I <sub>N</sub> | 1 A   |
| Nominal voltage U <sub>N</sub> | 60 V  |

|                                |       |
|--------------------------------|-------|
| cUL Recognized                 |       |
| mm <sup>2</sup> /AWG/kcmil     | 26-14 |
| Nominal current I <sub>N</sub> | 1 A   |
| Nominal voltage U <sub>N</sub> | 60 V  |

|                  |  |
|------------------|--|
| cULus Recognized |  |
|------------------|--|

## Accessories

### Accessories

#### System cable

Cable - VIP-CAB-FLK10/0,14/0,5M - 2318305



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m

Cable - VIP-CAB-FLK10/0,14/1,0M - 2318318



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m

## Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

### Accessories

#### Cable - VIP-CAB-FLK10/0,14/1,5M - 2318321



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

---

#### Cable - VIP-CAB-FLK10/0,14/2,0M - 2318334



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m

---

#### Cable - VIP-CAB-FLK10/0,14/3,0M - 2318347



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m

---

#### Cable - VIP-CAB-FLK10/0,14/4,0M - 2318350



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m

---

#### Cable - VIP-CAB-FLK10/0,14/6,0M - 2318363



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

---

### Required add-on products

# Passive module - VIP-2/PT/FLK10/ROC AI-12 - 2905313

## Accessories


Front adapters - FLKM 10-PA-ROC800 - 2904889



VARIOFACE front adapters for ROC800 controller

## Drawings

Circuit diagram

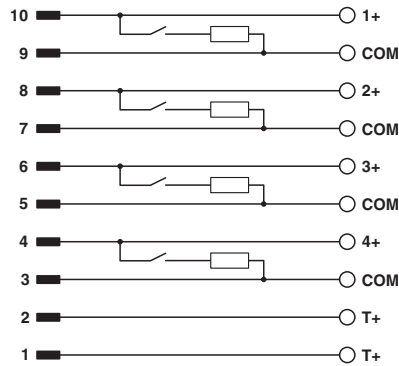



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331