



## DYNAMIC CHARACTERISTICS

APT30GP60BDQ1(G)

| Symbol       | Characteristic                                  | Test Conditions   | MIN | TYP  | MAX | UNIT |    |
|--------------|---|---|-----|------|-----|------|----|
| $C_{ies}$    | Input Capacitance                               | <b>Capacitance</b><br>$V_{GE} = 0V, V_{CE} = 25V$<br>$f = 1 \text{ MHz}$  |     | 3200 |     | pF   |    |
| $C_{oes}$    | Output Capacitance                              |   |     | 295  |     |      |    |
| $C_{res}$    | Reverse Transfer Capacitance                    |   |     | 20   |     |      |    |
| $V_{GEP}$    | Gate-to-Emitter Plateau Voltage                 | Gate Charge   |     | 7.5  |     | V    |    |
| $Q_g$        | Total Gate Charge <sup>(3)</sup>                | $V_{GE} = 15V$  |     | 90   |     | nC   |    |
| $Q_{ge}$     | Gate-Emitter Charge                             | $V_{CE} = 300V$   |     | 20   |     |      |    |
| $Q_{gc}$     | Gate-Collector ("Miller") Charge                | $I_C = 30A$   |     | 30   |     |      |    |
| SSOA         | Switching Safe Operating Area                   | $T_J = 150^\circ C, R_G = 5\Omega, V_{GE} = 15V, L = 100\mu H, V_{CE} = 600V$   | 120 |      |     | A    |    |
| $t_{d(on)}$  | Turn-on Delay Time                              | <b>Inductive Switching (25°C)</b><br>$V_{CC} = 400V$<br>$V_{GE} = 15V$<br>$I_C = 30A$<br>$R_G = 5\Omega$<br>$T_J = +25^\circ C$   |     | 13   |     | ns   |    |
| $t_r$        | Current Rise Time                               |   |     | 18   |     |      |    |
| $t_{d(off)}$ | Turn-off Delay Time                             |   |     | 55   |     |      |    |
| $t_f$        | Current Fall Time                               |   |     | 46   |     |      |    |
| $E_{on1}$    | Turn-on Switching Energy <sup>(4)</sup>         |   |     | 260  |     |      | μJ |
| $E_{on2}$    | Turn-on Switching Energy (Diode) <sup>(5)</sup> |   | 335 |      |     |      |    |
| $E_{off}$    | Turn-off Switching Energy <sup>(6)</sup>        |   | 250 | 330  |     |      |    |
| $t_{d(on)}$  | Turn-on Delay Time                              | <b>Inductive Switching (125°C)</b><br>$V_{CC} = 400V$<br>$V_{GE} = 15V$<br>$I_C = 30A$<br>$R_G = 5\Omega$<br>$T_J = +125^\circ C$ |     | 13   |     | ns   |    |
| $t_r$        | Current Rise Time                               |   |     | 18   |     |      |    |
| $t_{d(off)}$ | Turn-off Delay Time                             |   |     | 85   |     |      |    |
| $t_f$        | Current Fall Time                               |   |     | 80   |     |      |    |
| $E_{on1}$    | Turn-on Switching Energy <sup>(4)</sup>         |   |     | 260  |     |      | μJ |
| $E_{on2}$    | Turn-on Switching Energy (Diode) <sup>(5)</sup> |   |     | 510  |     |      |    |
| $E_{off}$    | Turn-off Switching Energy <sup>(6)</sup>        |   |     | 520  | 750 |      |    |

## THERMAL AND MECHANICAL CHARACTERISTICS

| Symbol          | Characteristic           | MIN | TYP | MAX  | UNIT |
|-----------------|--------------------------|-----|-----|------|------|
| $R_{\theta JC}$ | Junction to Case (IGBT)  |     |     | .27  | °C/W |
| $R_{\theta JC}$ | Junction to Case (DIODE) |     |     | 1.35 |      |
| $W_T$           | Package Weight           |     | 5.9 |      | gm   |

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② For Combi devices,  $I_{ces}$  includes both IGBT and FRED leakages

③ See MIL-STD-750 Method 3471.

④  $E_{on1}$  is the clamped inductive turn-on-energy of the IGBT only, without the effect of a commutating diode reverse recovery current adding to the IGBT turn-on loss. (See Figure 24.)

⑤  $E_{on2}$  is the clamped inductive turn-on energy that includes a commutating diode reverse recovery current in the IGBT turn-on switching loss. (See Figures 21, 22.)

⑥  $E_{off}$  is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1. (See Figures 21, 23.)

APT Reserves the right to change, without notice, the specifications and information contained herein.

# TYPICAL PERFORMANCE CURVES

APT30GP60BDQ1(G)

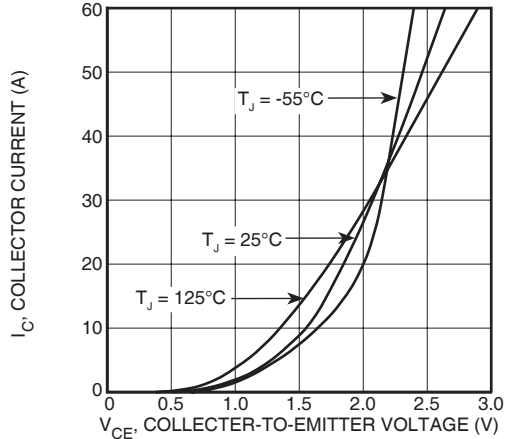


FIGURE 1, Output Characteristics( $T_J = 25^\circ\text{C}$ )

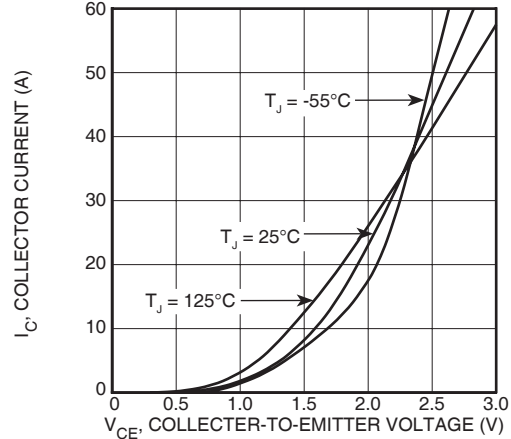


FIGURE 2, Output Characteristics ( $T_J = 125^\circ\text{C}$ )

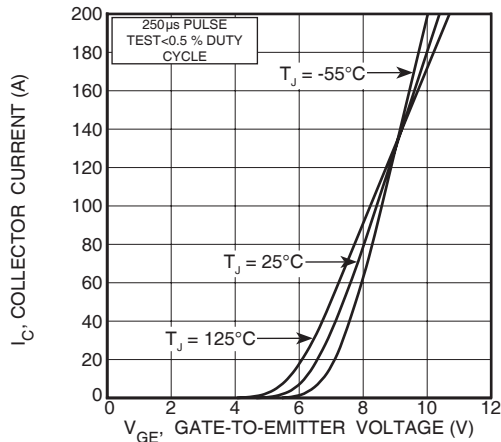


FIGURE 3, Transfer Characteristics

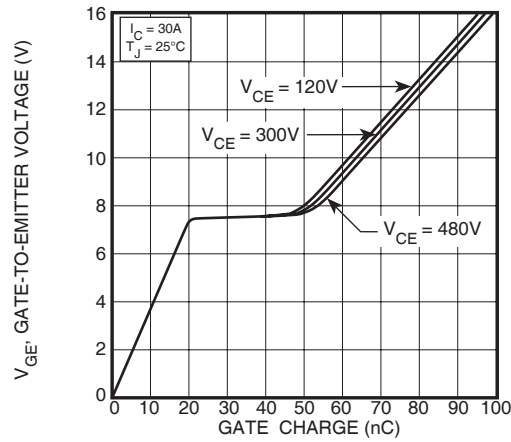


FIGURE 4, Gate Charge

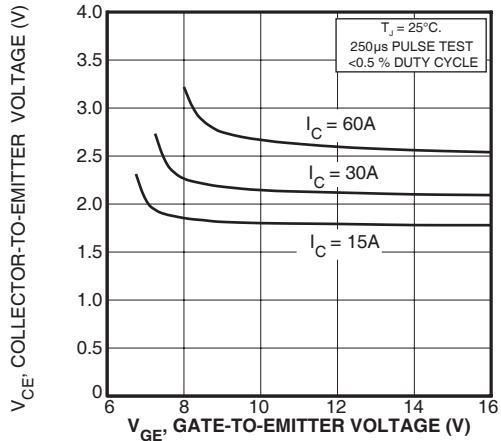


FIGURE 5, On State Voltage vs Gate-to-Emitter Voltage

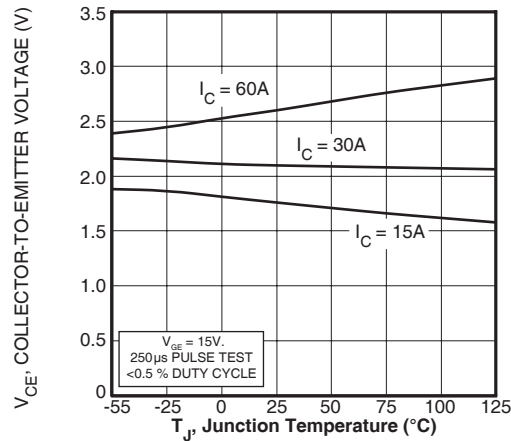


FIGURE 6, On State Voltage vs Junction Temperature

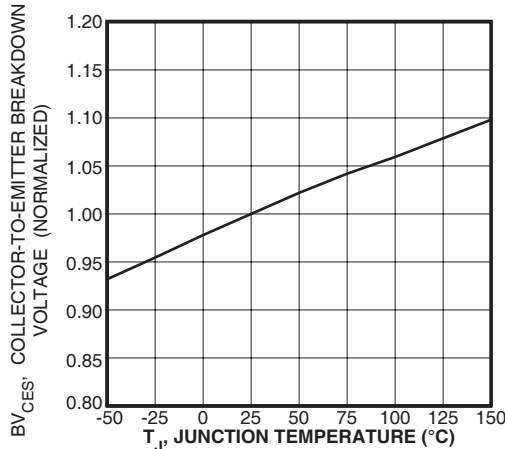


FIGURE 7, Breakdown Voltage vs. Junction Temperature

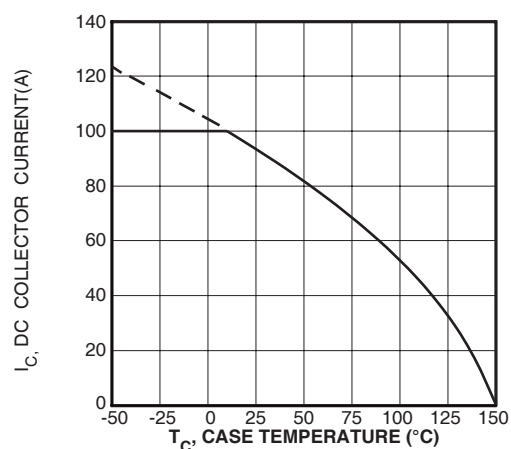


FIGURE 8, DC Collector Current vs Case Temperature

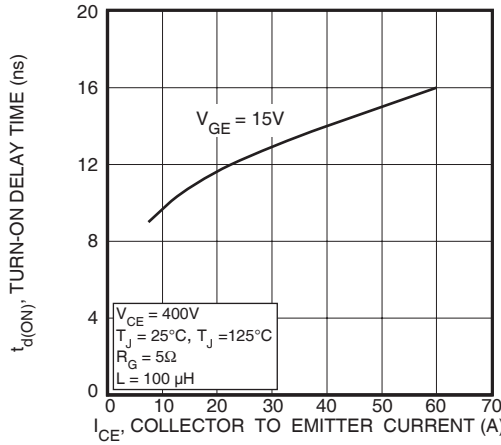


FIGURE 9, Turn-On Delay Time vs Collector Current

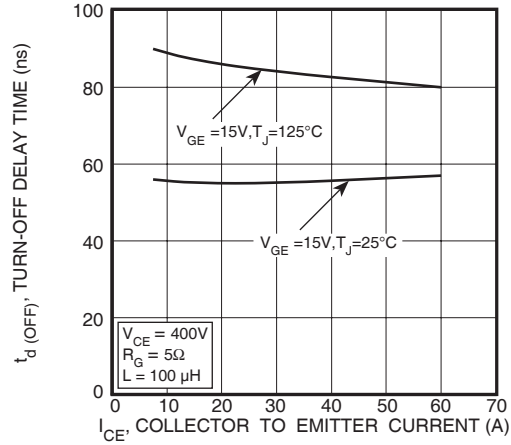


FIGURE 10, Turn-Off Delay Time vs Collector Current

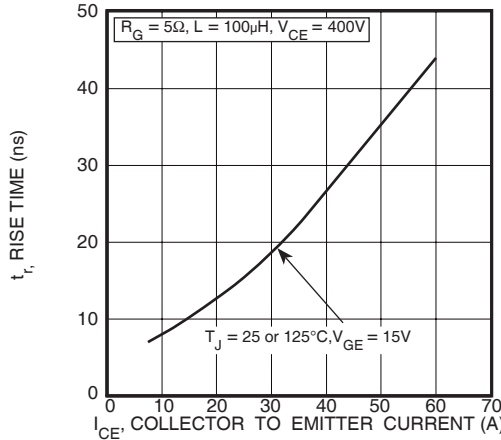


FIGURE 11, Current Rise Time vs Collector Current

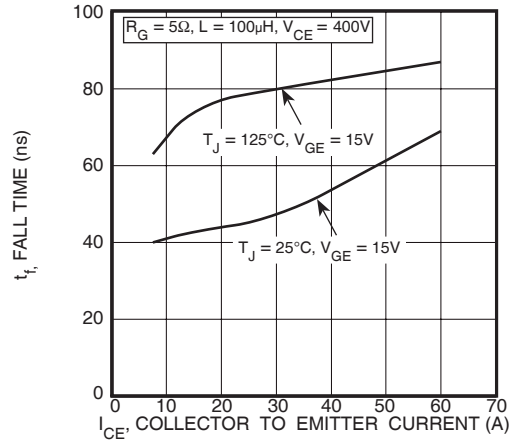


FIGURE 12, Current Fall Time vs Collector Current

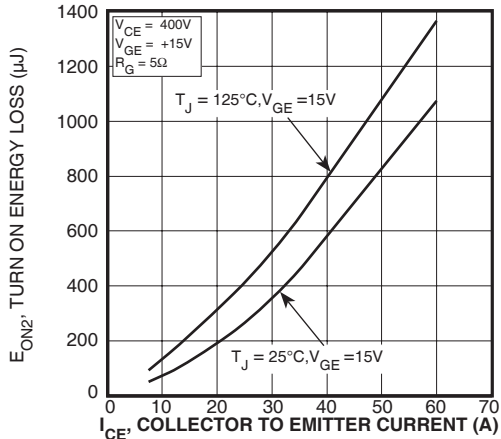


FIGURE 13, Turn-On Energy Loss vs Collector Current

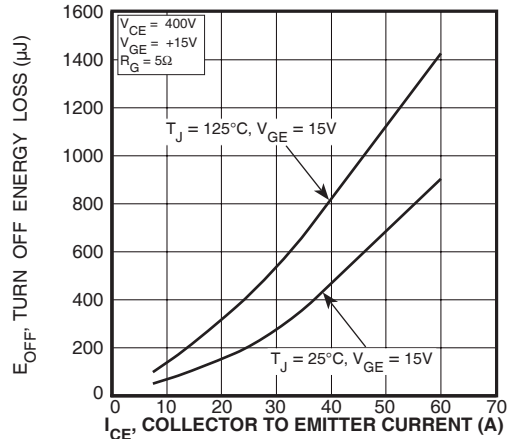


FIGURE 14, Turn Off Energy Loss vs Collector Current

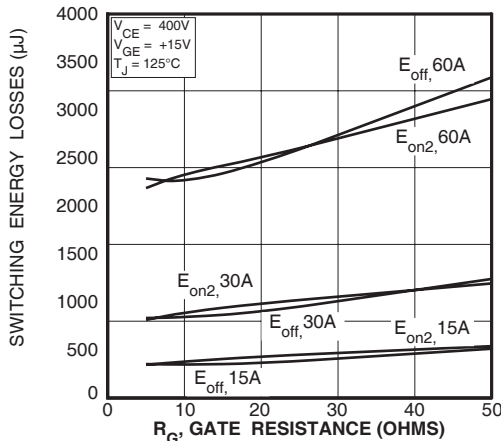


FIGURE 15, Switching Energy Losses vs. Gate Resistance

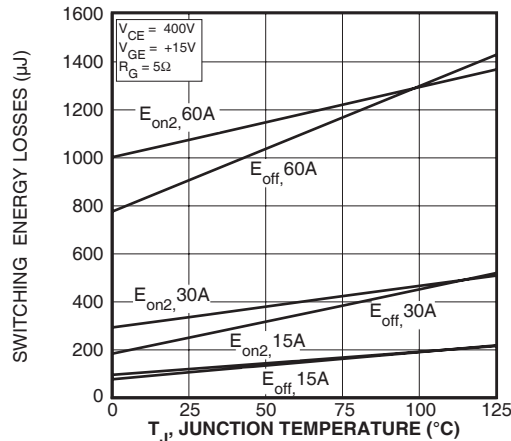


FIGURE 16, Switching Energy Losses vs Junction Temperature

# TYPICAL PERFORMANCE CURVES

APT30GP60BDQ1(G)

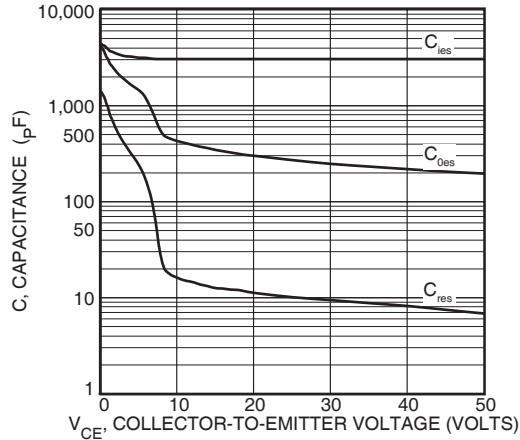


Figure 17, Capacitance vs Collector-To-Emitter Voltage

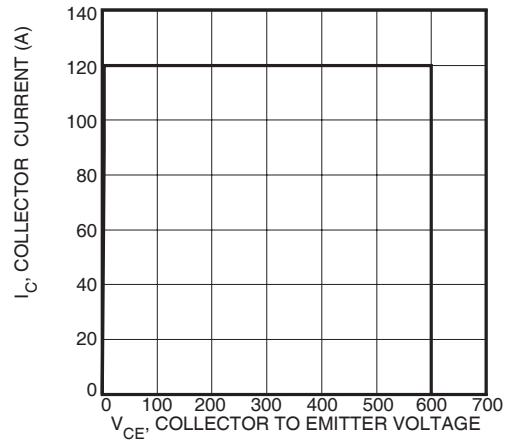


Figure 18, Minimum Switching Safe Operating Area

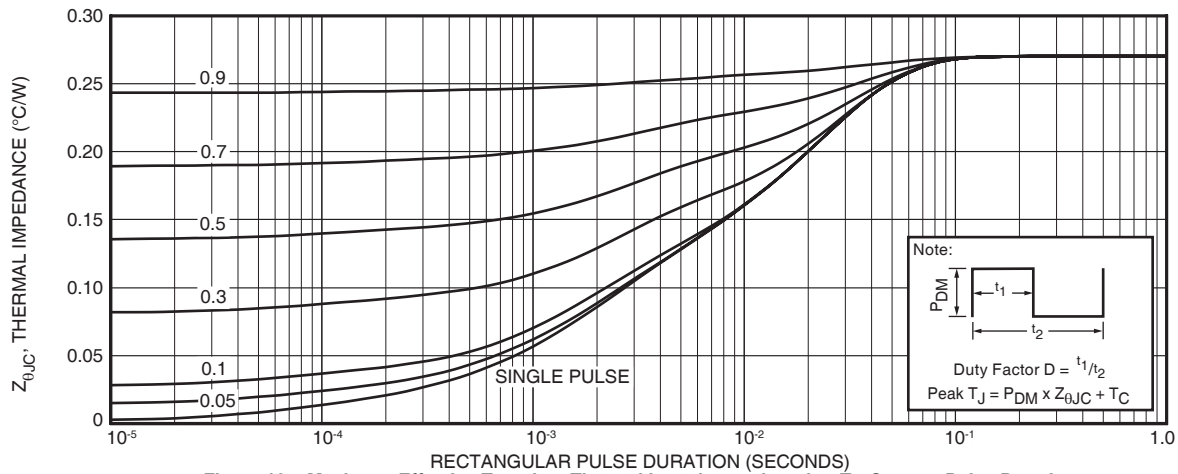


Figure 19a, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

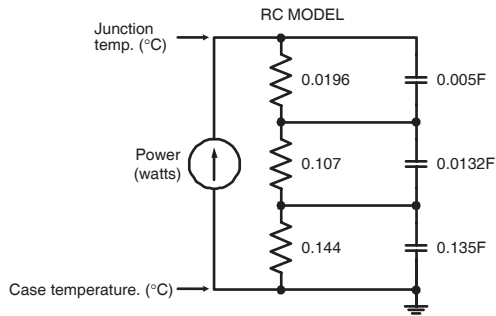


FIGURE 19b, TRANSIENT THERMAL IMPEDANCE MODEL

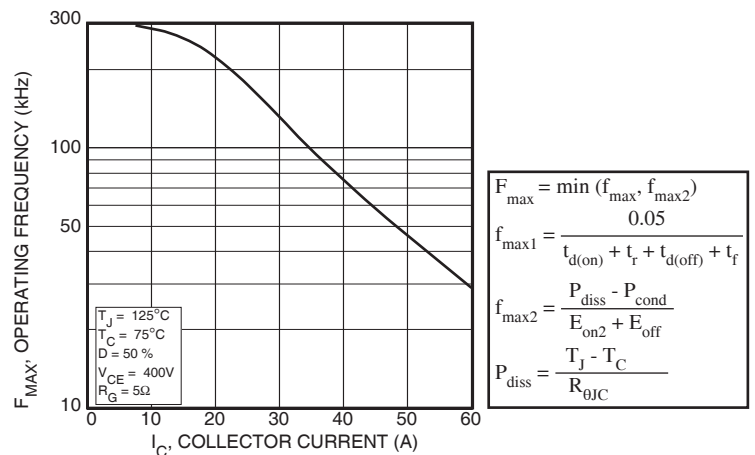


Figure 20, Operating Frequency vs Collector Current

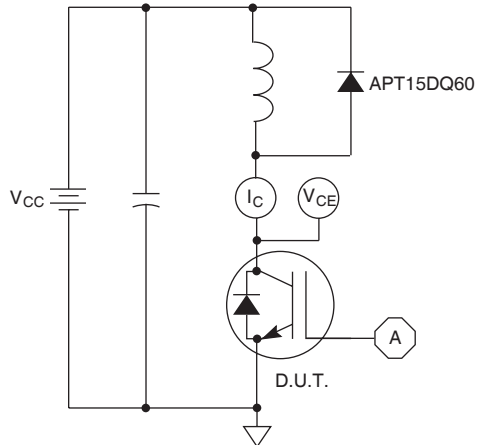


Figure 21, Inductive Switching Test Circuit

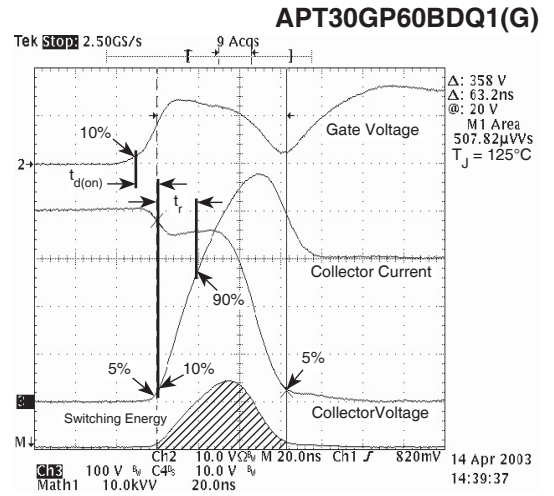


Figure 22, Turn-on Switching Waveforms and Definitions

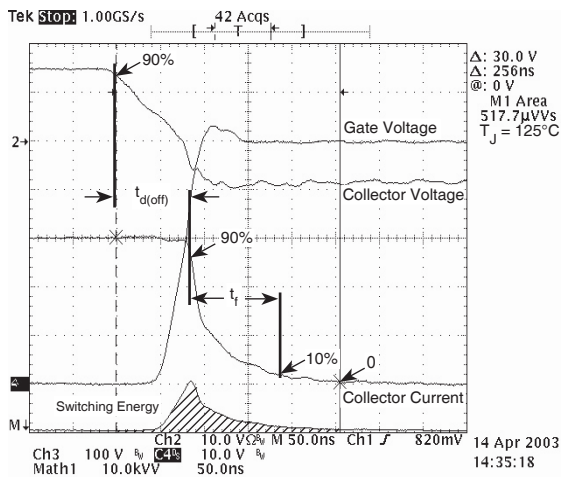


Figure 23, Turn-off Switching Waveforms and Definitions

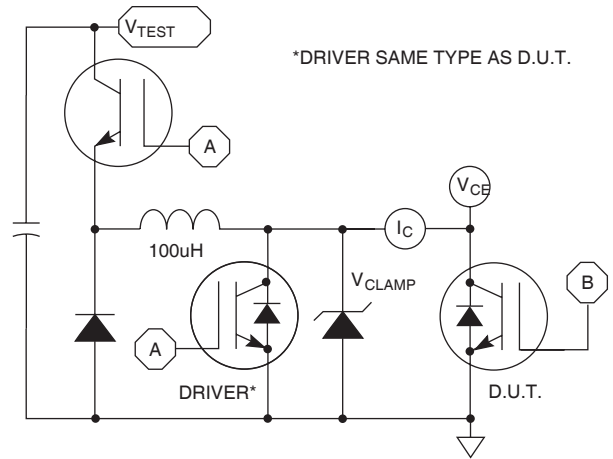


Figure 24,  $E_{ON1}$  Test Circuit

# ULTRAFAST SOFT RECOVERY ANTI-PARALLEL DIODE

**MAXIMUM RATINGS**

All Ratings:  $T_C = 25^\circ\text{C}$  unless otherwise specified.

| Symbol            | Characteristic / Test Conditions  | APT30GP60BDQ1(G) |  | UNIT |
|-------------------|---|------------------|--|------|
| $I_F(\text{AV})$  | Maximum Average Forward Current ( $T_C = 129^\circ\text{C}$ , Duty Cycle = 0.5) | 15               |  | Amps |
| $I_F(\text{RMS})$ | RMS Forward Current (Square wave, 50% duty)                                     | 30               |  |      |
| $I_{\text{FSM}}$  | Non-Repetitive Forward Surge Current ( $T_J = 45^\circ\text{C}$ , 8.3ms)        | 110              |  |      |

**STATIC ELECTRICAL CHARACTERISTICS**

| Symbol | Characteristic / Test Conditions | MIN | TYP   | MAX | UNIT  |
|--------|----------------------------------|-----|---|-----|-------|
| $V_F$  | Forward Voltage                  |     | $I_F = 30\text{A}$                          | 2.5 | Volts |
|        |                                  |     | $I_F = 60\text{A}$                          | 3.2 |       |
|        |                                  |     | $I_F = 30\text{A}, T_J = 125^\circ\text{C}$ | 2.1 |       |

**DYNAMIC CHARACTERISTICS**

| Symbol    | Characteristic                   | Test Conditions   | MIN | TYP | MAX | UNIT |
|-----------|----------------------------------|---|-----|-----|-----|------|
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 1\text{A}, di_F/dt = -100\text{A}/\mu\text{s}, V_R = 30\text{V}, T_J = 25^\circ\text{C}$     | -   | 15  |     | ns   |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 15\text{A}, di_F/dt = -200\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 25^\circ\text{C}$   | -   | 19  |     |      |
| $Q_{rr}$  | Reverse Recovery Charge          |   | -   | 21  |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |   | -   | 2   | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 15\text{A}, di_F/dt = -200\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 125^\circ\text{C}$  | -   | 105 |     | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |   | -   | 250 |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |   | -   | 5   | -   | Amps |
| $t_{rr}$  | Reverse Recovery Time            | $I_F = 15\text{A}, di_F/dt = -1000\text{A}/\mu\text{s}, V_R = 400\text{V}, T_C = 125^\circ\text{C}$ | -   | 55  |     | ns   |
| $Q_{rr}$  | Reverse Recovery Charge          |   | -   | 420 |     | nC   |
| $I_{RRM}$ | Maximum Reverse Recovery Current |   | -   | 15  |     | Amps |

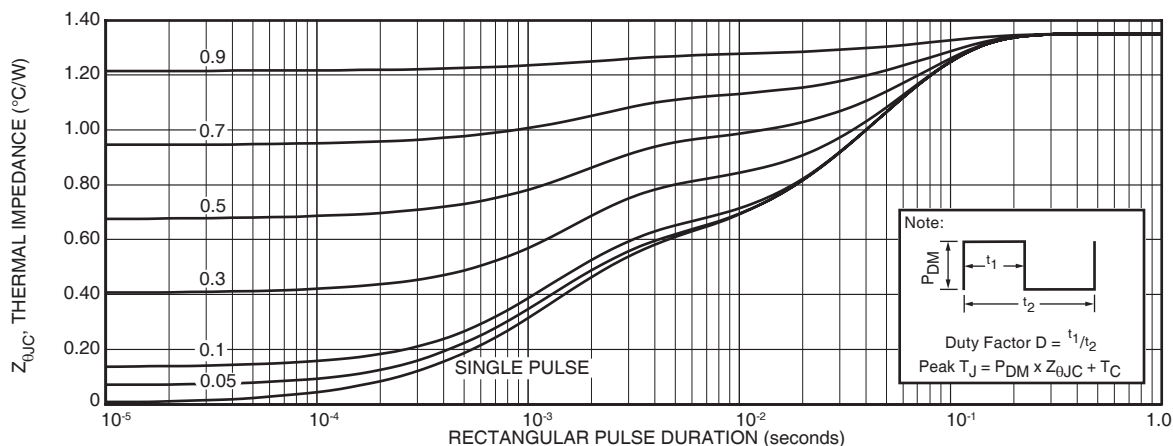


FIGURE 25a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

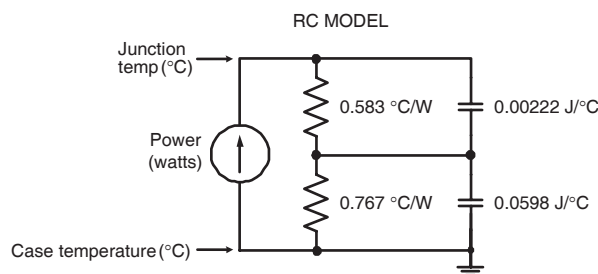


FIGURE 25b. TRANSIENT THERMAL IMPEDANCE

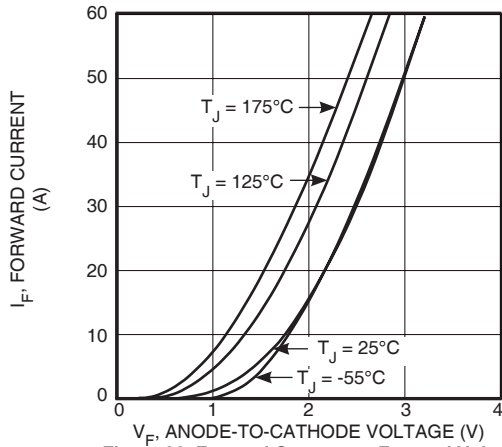


Figure 26. Forward Current vs. Forward Voltage

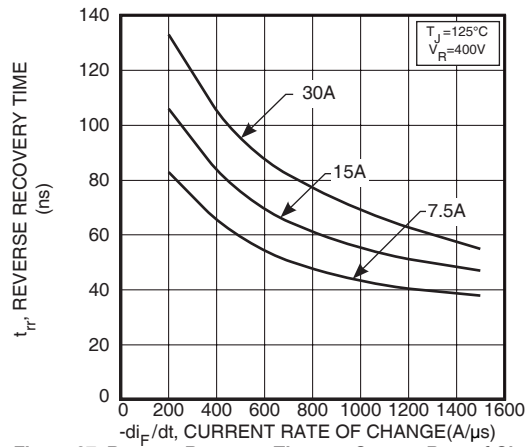


Figure 27. Reverse Recovery Time vs. Current Rate of Change

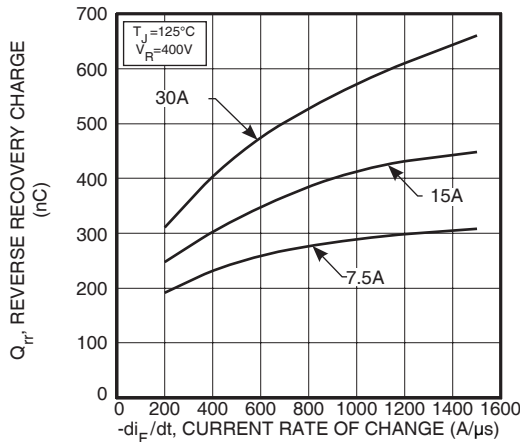


Figure 28. Reverse Recovery Charge vs. Current Rate of Change

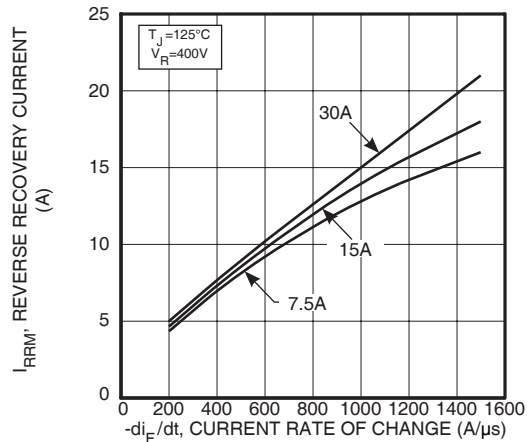


Figure 29. Reverse Recovery Current vs. Current Rate of Change

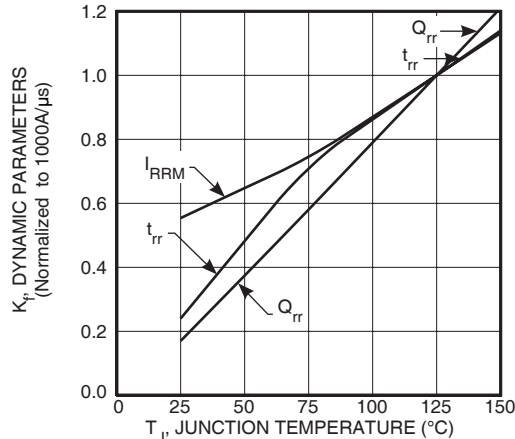


Figure 30. Dynamic Parameters vs. Junction Temperature

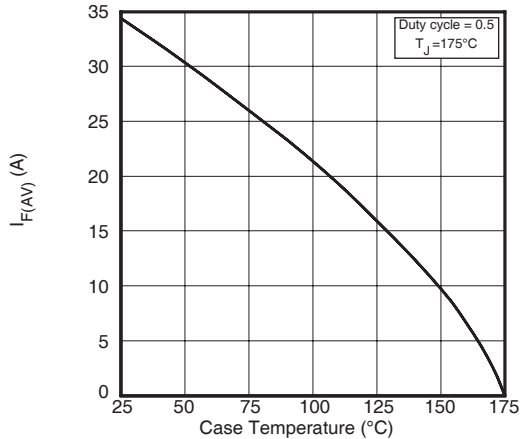


Figure 31. Maximum Average Forward Current vs. Case Temperature

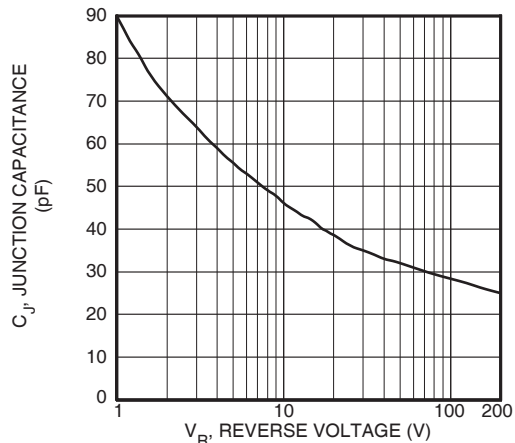


Figure 32. Junction Capacitance vs. Reverse Voltage



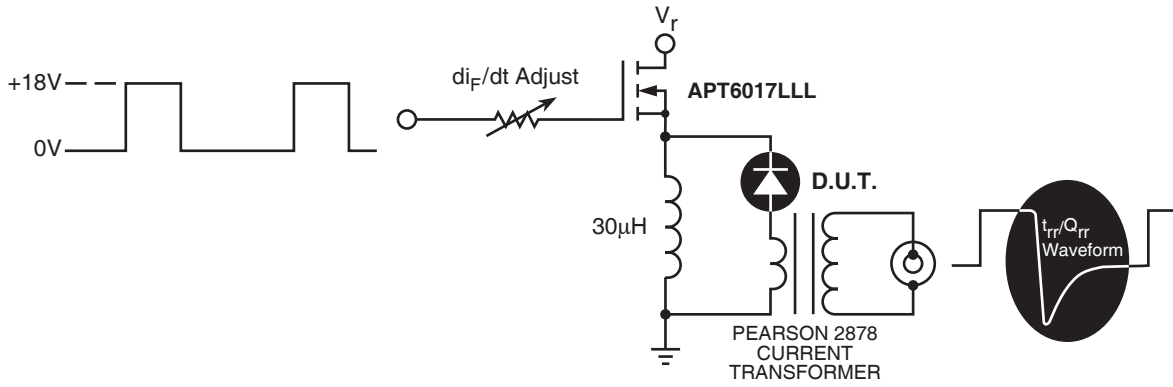


Figure 33. Diode Test Circuit

- 1  $I_F$  - Forward Conduction Current
- 2  $di_F/dt$  - Rate of Diode Current Change Through Zero Crossing.
- 3  $I_{RRM}$  - Maximum Reverse Recovery Current.
- 4  $t_{rr}$  - Reverse Recovery Time, measured from zero crossing where diode current goes from positive to negative, to the point at which the straight line through  $I_{RRM}$  and  $0.25 \cdot I_{RRM}$  passes through zero.
- 5  $Q_{rr}$  - Area Under the Curve Defined by  $I_{RRM}$  and  $t_{rr}$ .


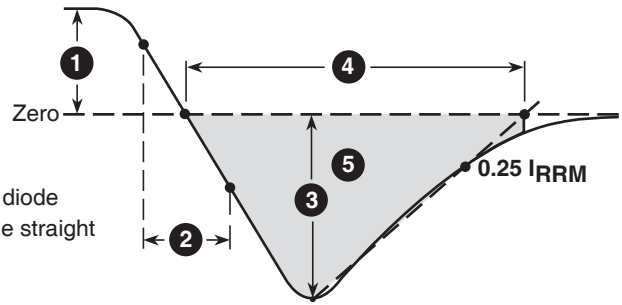


Figure 34, Diode Reverse Recovery Waveform and Definitions

### TO-247 Package Outline

ⓔ1 SAC: Tin, Silver, Copper

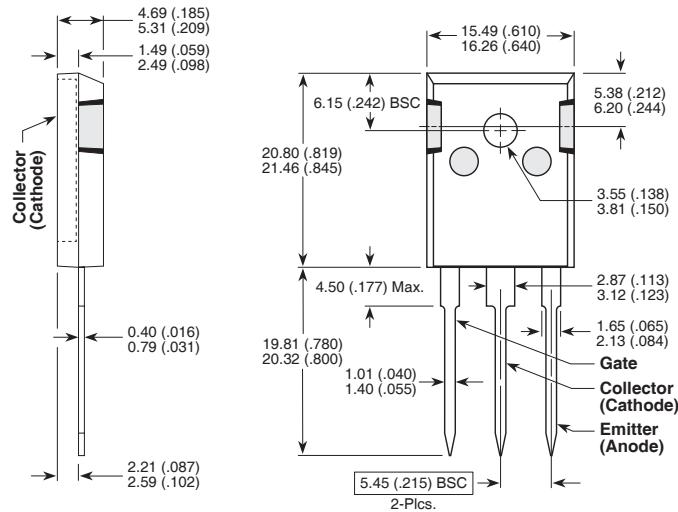

Dimensions in Millimeters and (Inches)

APT's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. US and Foreign patents pending. All Rights Reserved.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331