

# Fast-acting UL Class CF CUBEFuse

**Catalog symbol**

- FCF\_RN

**Description**

The Bussmann™ series fast-acting CUBEFuse is a finger-safe, current-limiting UL Class CF branch circuit fuse. It features the smallest installed footprint of any UL Class CC, J, RK or T fuse.

**Ratings**

- Volts 600 Vac/dc
- Amps 1-100 A
- Interrupting rating
  - 300 kA RMS Sym (UL up to 60 A)
  - 200 kA (UL 70-100 A, CSA 1-100 A)
  - 50 kA DC

**Agency information**

- UL Listed Fuse: Guide JDDZ, File E4273
- CSA Certified, Class 1422- 02, File 53787
- RoHS compliant
- CE

**Catalog Numbers (amp)**

|         |         |         |          |
|---------|---------|---------|----------|
| FCF1RN  | FCF20RN | FCF45RN | FCF90RN  |
| FCF3RN  | FCF25RN | FCF50RN | FCF100RN |
| FCF6RN  | FCF30RN | FCF60RN |          |
| FCF10RN | FCF35RN | FCF70RN |          |
| FCF15RN | FCF40RN | FCF80RN |          |

**Electrical characteristics**

- 4 minutes max clearing time at 200% rated current for up to 30 A fuses
- 6 minutes max clearing time at 200% rated current for 35 to 60 A fuses
- 8 minutes max clearing time at 200% rated current for 70 to 100 A fuses

**Watts loss at rated current:**

| Fuse amps | Watts |
|-----------|-------|
| FCF15RN   | 3.48  |
| FCF30RN   | 5.45  |
| FCF60RN   | 7.27  |
| FCF100RN  | 11.50 |

**Operating and storage temperature range:**

-40°C to 80°C

**Materials**

- Case: glass filled PES (Polyethersulfone)
- Terminals: electroless tin plated copper alloy

**Features**

- The world's first finger-safe power fuse system
- Smallest installed footprint of any Class CC, J, and RK fuse
- UL Class CF meets Class J fast-acting electrical performance requirements
- Faster response to damaging faults to help reduce destructive thermal and magnetic forces
- True fast-acting fuse construction
- High interrupting rating to safely interrupt faults up to 300 kA
- No venting of arc or molten metal and gases during opening
- Low let-through currents under fault conditions


**Carton quantity and weight**

| Amps     | Qty. | Weight lbs (kg) |
|----------|------|-----------------|
| up to 30 | 12   | 1.39 (0.63)     |
| 35-60    | 12   | 1.42 (0.65)     |
| 70-100   | 6    | 1.74 (0.79)     |




Powering Business Worldwide

Dimensions — in (mm)

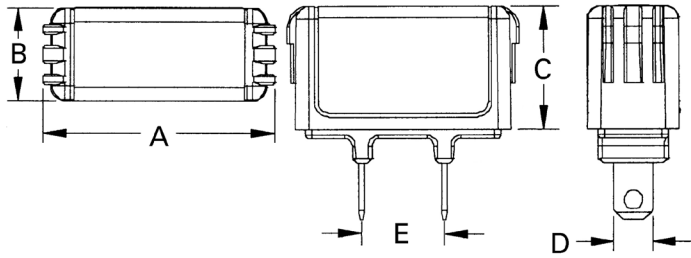


| Amp range | A         | B         | C         | D         | E         |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 1-15      |           |           |           | 0.23 (6)  |           |
| 20        | 1.88 (48) | 0.75 (19) | 1.0 (25)  | 0.27 (7)  |           |
| 25-30     |           |           |           | 0.31 (8)  | 0.67 (17) |
| 35-40     |           |           |           | 0.36 (9)  |           |
| 45-50     | 2.13 (54) |           | 1.13 (29) | 0.44 (11) |           |
| 60        |           | 1.0 (25)  |           |           |           |
| 70        |           |           |           | 0.49 (12) | 0.64 (16) |
| 80-90     | 3.01 (76) |           | 1.26 (32) | 0.57 (14) |           |
| 100       |           |           |           |           |           |

Current limitation curves

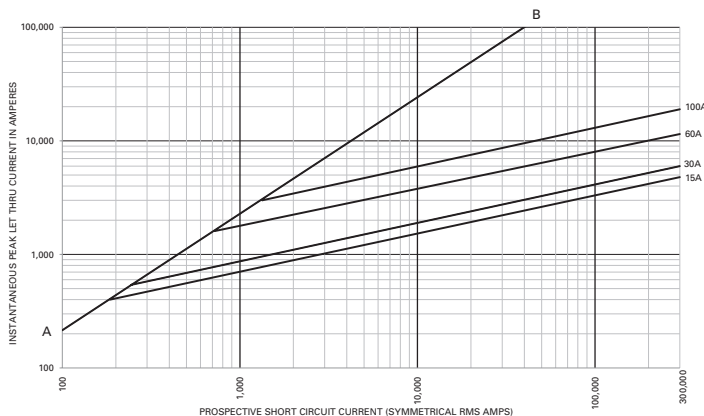

Time-current characteristic curves — average melt

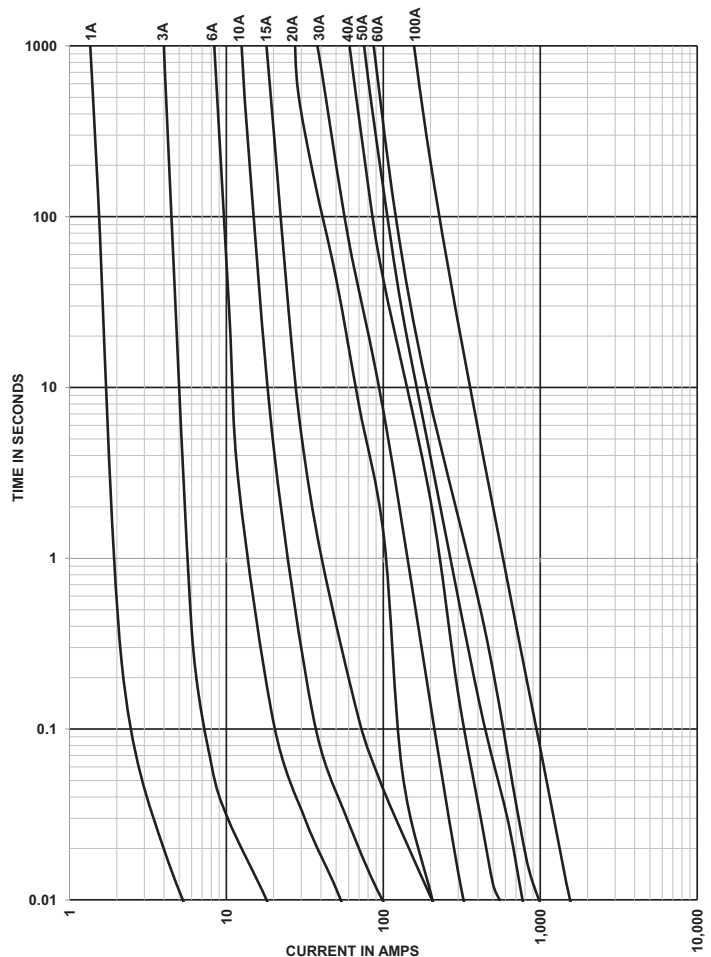

CUBEFuse holders, disconnects and panelboards

The CUBEfuse is used in the following Bussmann series products.

| Description                         | Catalog symbol | Data sheet no. |
|-------------------------------------|----------------|----------------|
| 30, 60 and 100 A holders            | TCFH_N         | 9007           |
| 1-, 2- and 3-pole UL 98 switch      | CCP2_CF        | 10801          |
| 1-, 2, and 3-pole panelboard switch | CCP2B          | 1161           |

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

Bussmann Division  
114 Old State Road  
Ellisville, MO 63021  
United States  
Eaton.com/bussmannseries

© 2018 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2147 - BU-SB10811  
August 2018

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group  
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: [Eaton.com/bussmannseries](http://Eaton.com/bussmannseries)

Follow us on social media to get the latest product and support information.





**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331