



Fast Switching SCR T7SH_40

400A Avg.
(700 RMS)
Up to 1200 Volts
10-50 μ s

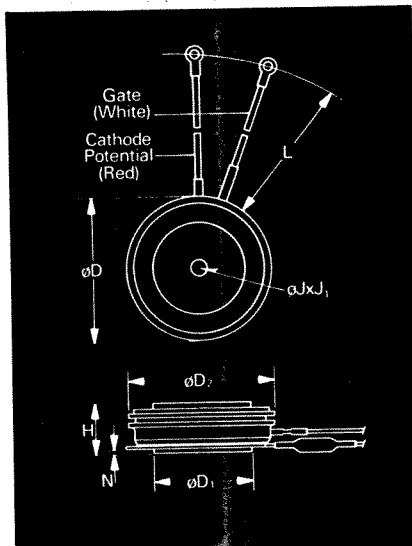

Symbol	Inches		Millimeters	
	Min.	Max.	Min.	Max.
ϕD	1.850	1.900	45.72	48.26
ϕD_1	1.140	1.180	28.96	29.97
ϕD_2	1.760	1.850	44.70	46.99
H	.545	.605	13.84	15.37
ϕJ	.135	.145	3.43	3.68
J_1	.072	.082	1.83	2.08
L	7.75	8.50	196.85	215.90
N	.025		.64	

Creep Distance—.41 in. min. (10.41 mm).
Strike Distance—.35 in. min. (8.89 mm).
Finish-Nickel Plate.
Approx. Weight—4 oz. (113 g.)
1. Dimension "H" is a clamped dimension.

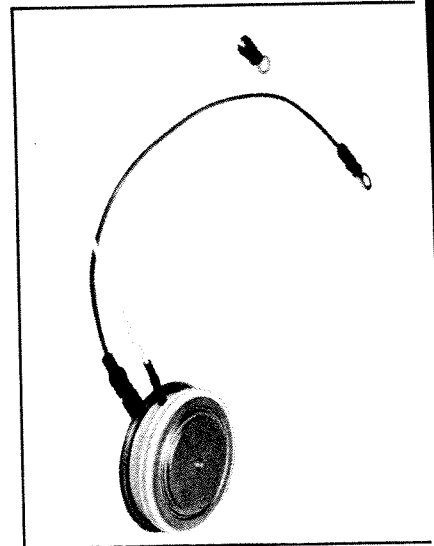

T7S Outline

Features:

- Interdigitated, di/namic Gate structure
- Hard Commutation Turn-Off
- Forward Blocking Voltage Capabilities to 1200 Volts
- Low Switching Losses at High Frequency
- Soft Commutation (Feedback Diode) Testing Available
- High di/dt with softgate control

Applications:

- Induction Heating
- Transportation
- Inverters
- Crowbars
- Cycloconverters

Ordering Information

Type	Voltage		Current		Turn-off		Gate current		Leads	
Code	V _{DRM} and V _{RRM} (V)	Code	I _{T(av)} (A)	Code	t _q usec	Code	I _{GT} (ma)	Code	Case	Code
T7SH	100	01	400	40	10	8	~ 150	4	T7S	DN
	200	02			15					
	300	03			20					
	400	04			25					
	500	05			30					
	600	06			40					
	700	07			50					
	800	08								
	900	09								
	1000	10								
	1100	11								
	1200	12								

Example

Obtain optimum device performance for your application by selecting proper Order Code.

Type T72H rated at 400A average with V_{DRM} = 1000V, I_{GT} = 150 ma, t_q = 30 μ sec max. and leads—order as:

Type	Voltage	Current	Turn Off	Gate Current	Leads
T 7 S H	1 0	4 0	5	4	D N

**400A Avg.
(700 RMS)
Up to 1200 Volts
10-50 μ s**

**Fast Switching
SCR
T7SH_40**

Voltage ②

Blocking State Maximums ($T_J = 125^\circ\text{C}$)

Repetitive peak forward blocking voltage, V ...
Repetitive peak reverse voltage, V ...
Non-repetitive transient peak reverse voltage,
 $t \leq 5.0$ msec, V ...

Symbol

V_{DRM}
 V_{RRM}
 V_{RSM}
 I_{DRM}
 I_{RRM}

100	200	300	400	500	600	700	800	900	1000	1100	1200
100	200	300	400	500	600	700	800	900	1000	1100	1200
200	300	400	500	600	700	800	900	1000	1100	1200	1300

Current

Conducting State Maximums
($T_J = 125^\circ\text{C}$)

RMS forward current, A ...
Ave. forward current, A ...
One-half cycle surge current③, A ...
3 cycle surge current③, A ...
10 cycle surge current③, A ...
 I^2t for fusing (for times ≥ 8.3 ms)
A² sec. ...
Forward voltage drop at $I_{TM} = 1500\text{A}$
and $T_J = 125^\circ\text{C}$, V ...
Min. repetitive di/dt ④④④ A/ μ sec ...

Symbol

$I_T(\text{rms})$
 $I_T(\text{av})$
 I_{TSM}
 I_{TSM}
 I_{TSM}
 I^2t
 V_{TM}
 di/dt

T7SH_40

628
400
8000
5765
4980
267,000
3.15
500

Switching

($T_J = 125^\circ\text{C}$)

Max. turn-off time, $I_T = 1000\text{A}$, $T_J = 125^\circ\text{C}$
 $t_p = 100$ μ sec, $di/dt = 50$
A/ μ sec., reapplied $dv/dt =$
200V/ μ sec. linear to 0.8 V_{DRM} , μ sec. ③③ t_q
Typ. delay time, $I_{TM} = 1000\text{A}$
 $T_D = .8$ V_{DRM} ④, μ sec t_d
Min. critical dv/dt exponential to .8
 V_{DRM} , $T_J = 125^\circ\text{C}$, V/ μ sec ②② dv/dt
Min. di/dt , non-repetitive, A/ μ sec ①④④ di/dt

Symbol

10 to 50
.5
300
1200

Gate

Maximum Parameters
($T_J = 125^\circ\text{C}$)

Gate current to trigger at $V_D = 12\text{V}$, mA ...
Gate voltage to trigger at $V_D = 12\text{V}$, V ...
Non-triggering gate voltage, $T_J = 125^\circ\text{C}$,
and rated V_{DRM} , V ...
Peak forward gate current, A ...
Peak reverse gate voltage, V ...
Peak gate power, Watts ...
Average gate power, Watts ...

Symbol

I_{GT}
 V_{GT}
 V_{GDM}
 I_{GTM}
 V_{GRM}
 P_{GM}
 $P_{G(av)}$

150
3
.25
4
5
16
3

Thermal and Mechanical



Min., Max. oper. junction temp., $^\circ\text{C}$...
Min., Max. storage temp., $^\circ\text{C}$...
Max. mounting force, lb. ... ①
Thermal resistance⑤, double-
side cooling, junction to case,
 $^\circ\text{C}/\text{Watt}$...
Case to sink, lubricated, $^\circ\text{C}/\text{Watt}$...

Symbol

T_J
 T_{stg}
 $R_{\theta JC}$
 $R_{\theta CS}$

-40 to +125
-40 to +150
2000 to 2400
.045
.02


- ① Consult recommended mounting procedures.
- ② Applies for zero or negative gate bias.
- ③ Per JEDEC RS-397, 5.2.2.1.
- ④ With recommended gate drive.
- ⑤ Higher dv/dt ratings available, consult factory.
- ⑥ Per JEDEC standard RS-397, 5.2.2.6.
- ⑦ For operation with antiparallel diode, consult factory.

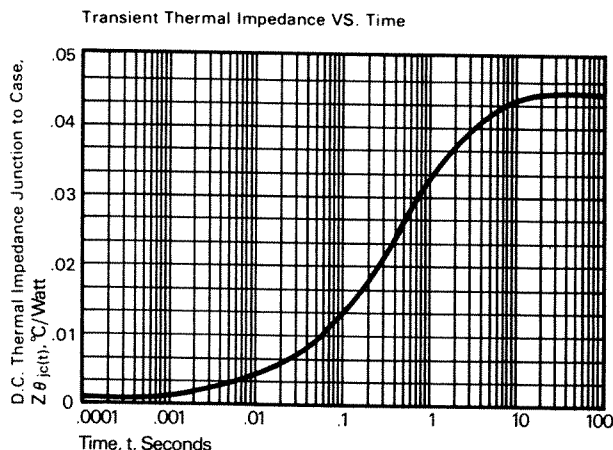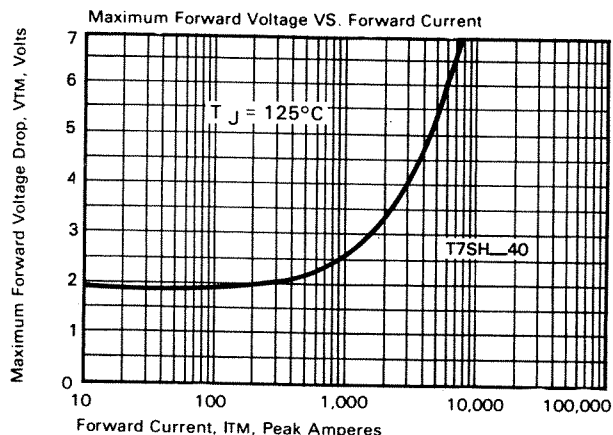






Fast Switching SCR T7SH_40

400A Avg.
(700 RMS)
Up to 1200 Volts
10-50 μ s

Sinusoidal Current Data

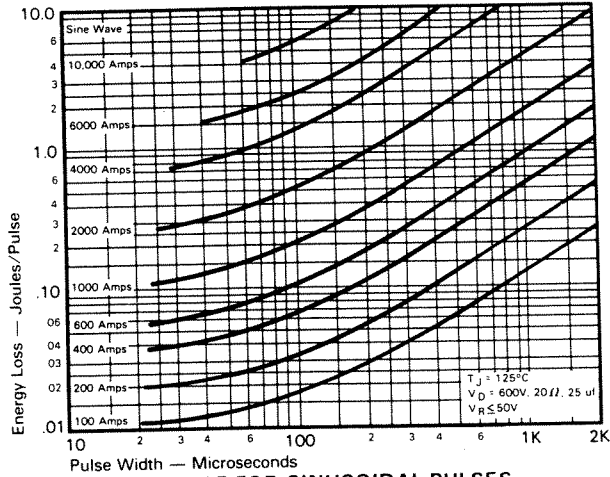


Trapezoidal Wave Current Data

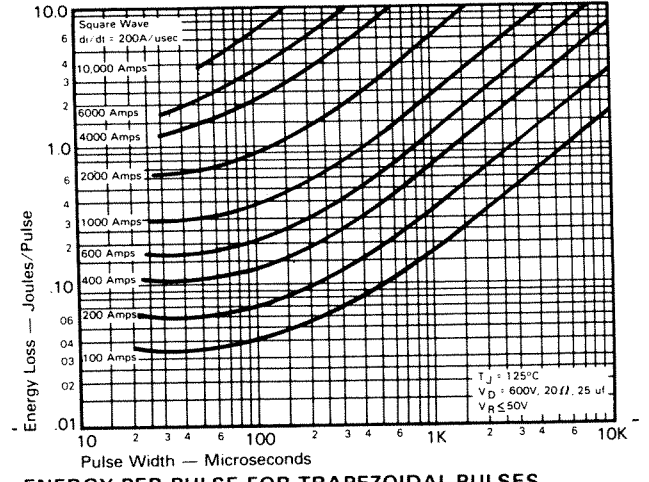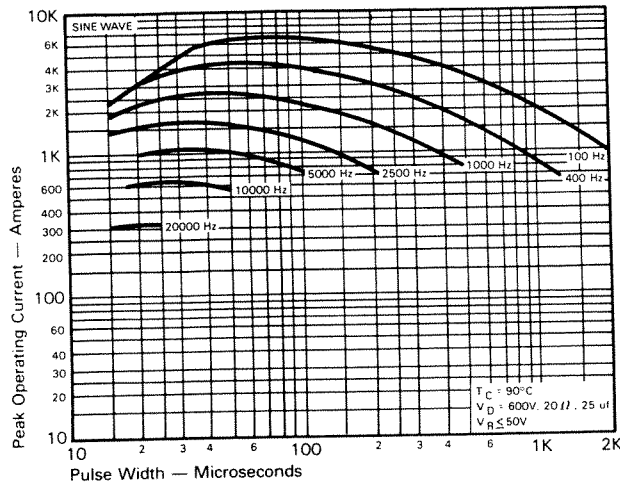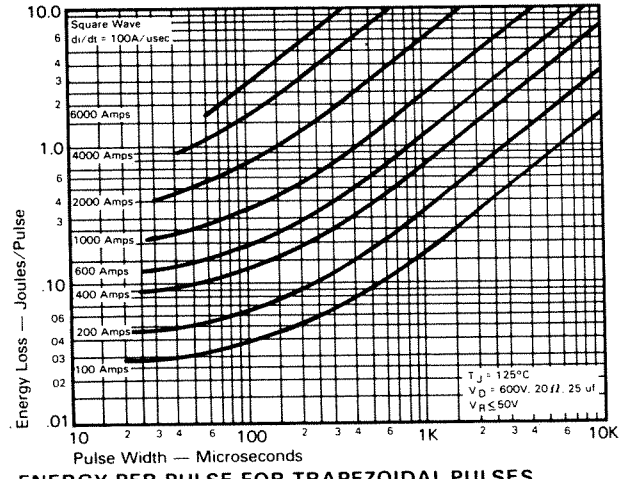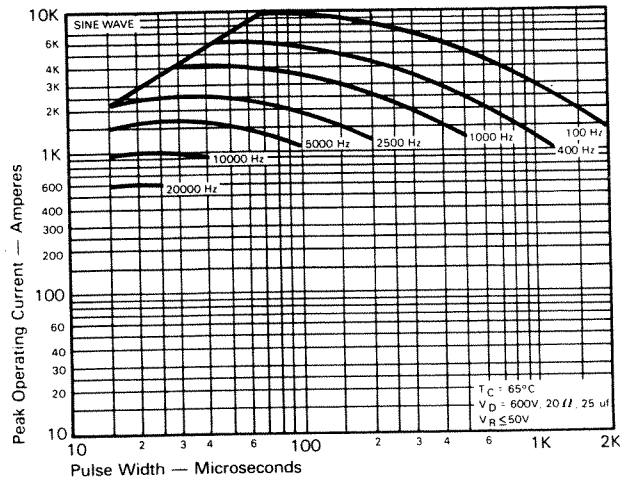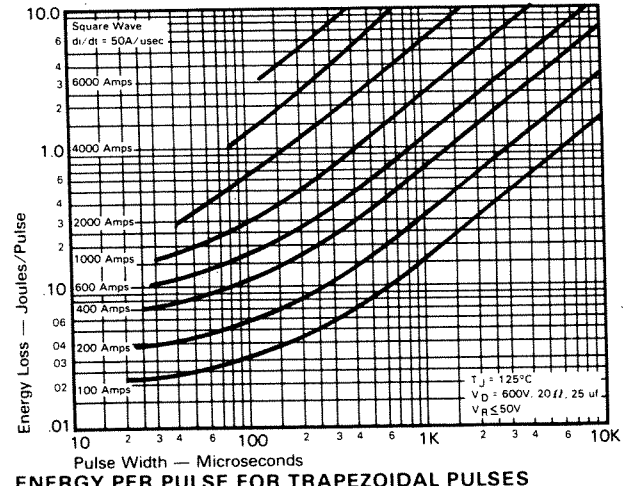


**400A Avg.
(700 RMS)
Up to 1200 Volts
10-50 μ s**

**Fast Switching
SCR
T7SH_40**


**Trapezoidal Wave Current Data
($T_C = 65^\circ\text{C}$)**

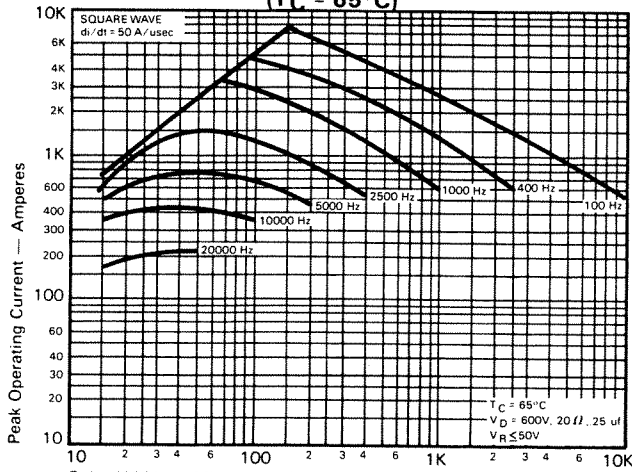

**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 50\text{A/u sec}$)**

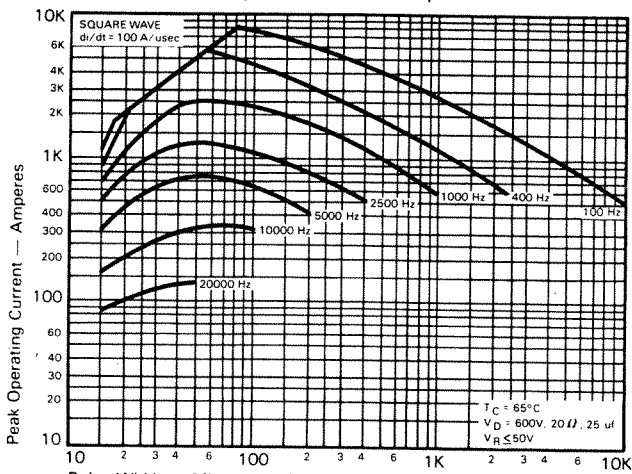


**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 100\text{A/u sec}$)**

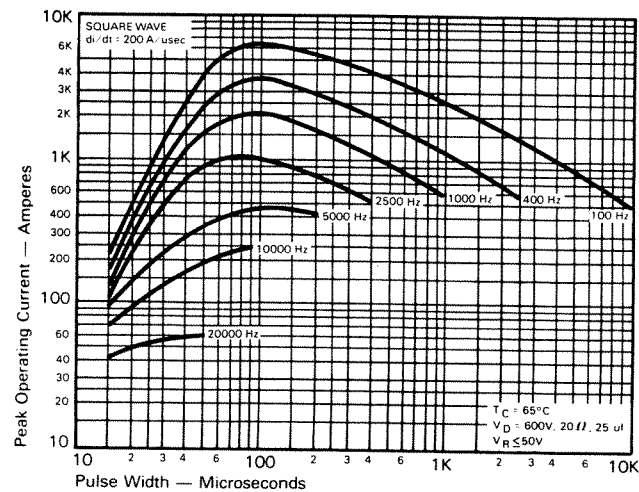


**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 200\text{A/u sec}$)**


**Trapezoidal Wave Current Data
($T_C = 90^\circ\text{C}$)**

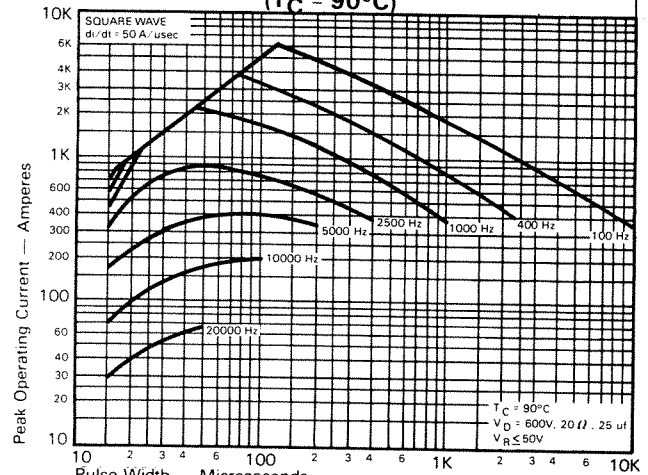

**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 50\text{A/u sec}$)**

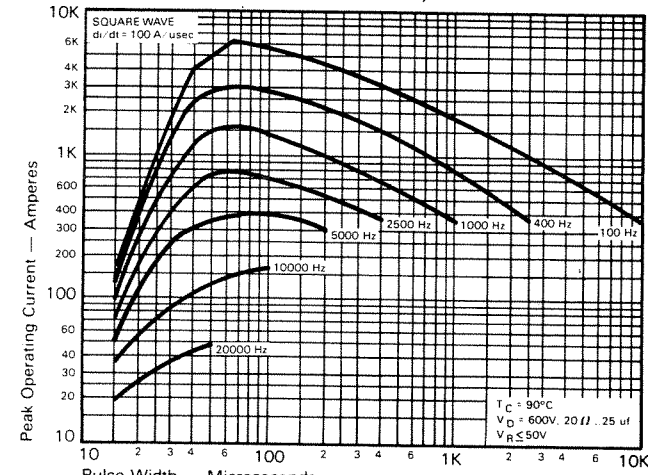

**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 100\text{A/u sec}$)**

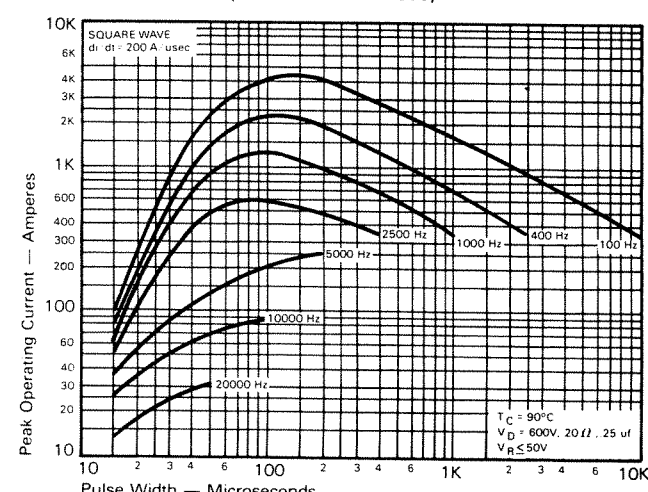

**MAXIMUM ALLOWABLE PEAK ON-STATE CURRENT
vs. PULSE WIDTH ($di/dt = 200\text{A/u sec}$)**



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331