



Powermite High Efficiency 2.5 Amp Ultrafast Rectifier

DESCRIPTION

The Microsemi UPR5e3, UPR10e3, and UPR15e3 Powermite high efficiency rectifiers are RoHS compliant and offers optimized forward voltage characteristics with reverse blocking capabilities up to 150 Volts. They are ideal for surface mount applications that operate at high frequencies.

In addition to its size advantages, Powermite package features include a full metallic bottom that eliminates possibility of solder flux entrapment during assembly and a unique locking tab acts as an efficient heat path from die to mounting plane for external heat sinking with very low thermal resistance junction to case (bottom). Its innovative design makes this device ideal for use with automatic insertion equipment.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Low thermal resistance DO-216 package for higher current operation
- Ultrafast recovery time of 25 ns
- Efficient heat path with Integral locking bottom metal tab
- Low forward voltage
- Full metallic bottom eliminates flux entrapment
- Compatible with automatic insertion equipment
- Low profile-maximum height of 1 mm
- RoHS compliant.


APPLICATIONS / BENEFITS

- Switching and regulating power supplies
- Charge pump circuits
- Reduces reverse recovery loss with low I_{RM}
- Small 8.45 mm² foot print (See [mounting pad](#) details)

MAXIMUM RATINGS @ 25 °C unless otherwise specified

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-55 to +150	°C
Thermal Resistance Junction-to-Tab		30	°C/W
Thermal Resistance Junction-to-Bottom		10	°C/W
Non-Repetitive Peak Forward Surge Current (At 8.3 ms Single half-sine wave)	I_{FSM}	25	A
Working Peak Reverse Voltage	V_{RWM}	UPR5e3 50	V
		UPR10e3 100	
		UPR15e3 150	
Average Rectified Output Current (At rated V_{RWM} , $T_C = 75^\circ\text{C}$)	I_O	2.5	A
Solder Temperature @ 10 s		260	°C

Notes: 1. When mounted on FR-4 PC board using 1 oz copper with recommended minimum foot print.



DO-216 Package

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

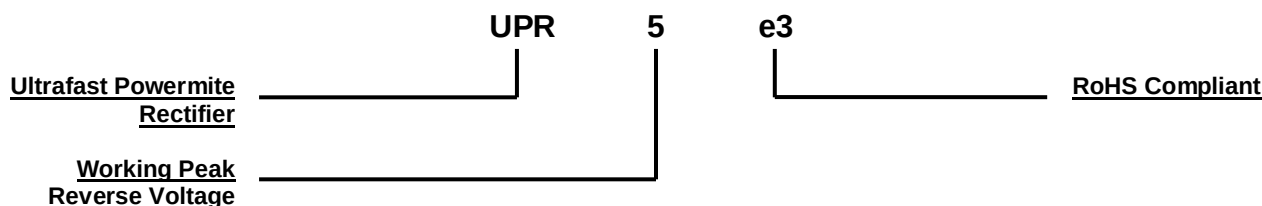
Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy compound meeting UL94V-0
- TERMINALS: Annealed matte-tin plating over copper and readily solderable per MIL-STD-750, method 2026. (Consult factor for tin-lead plating.)
- MARKING: R05• for UPR5e3, R10• for UPR10e3, and R15• for UPR15e3 (dot indicates "e3" designation)
- POLARITY: Cathode designated by TAB 2
- TAPE & REEL option: 12 mm tape per standard EIA-481-B. Consult factory for quantities.
- WEIGHT: Approximately 0.016 gram
- See [Package Dimensions](#) on last page.

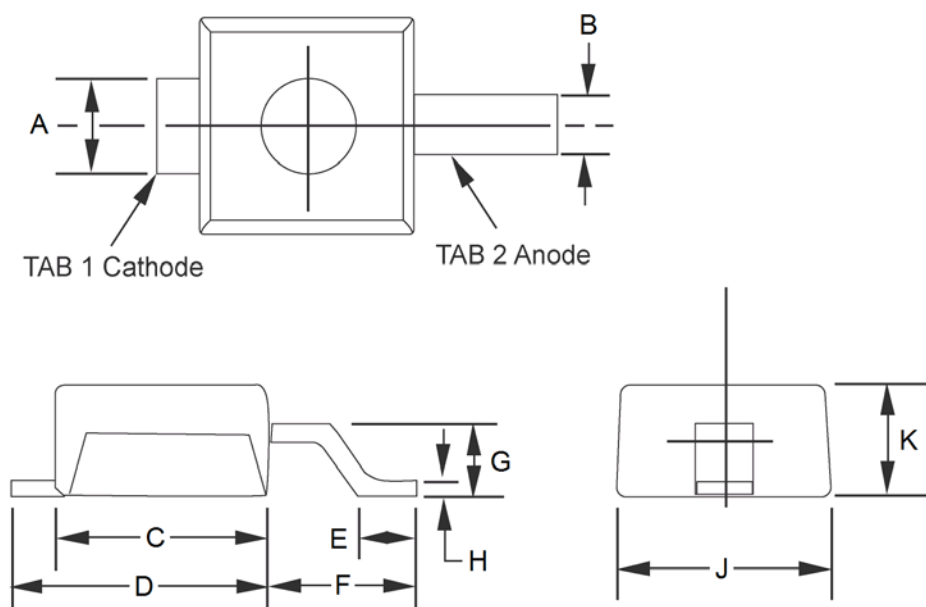
PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
f	Frequency
I_F	Forward Current: The dc current flowing from the external circuit into the anode terminal
I_{FSM}	Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B)
I_O	Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
I_R	Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R
I_{REC}	Recovery Current:
V_R	Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region
V_{RWM}	Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV.

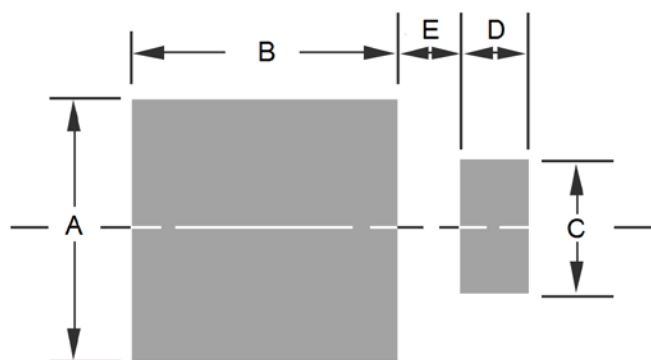
ELECTRICAL CHARACTERISTICS @ $T_A = +25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Conditions	Min	Max	Units
Forward Voltage (Note 1)	V_F	$I_F = 2.0$ Amps		0.975	V
Forward Voltage (Note 1)	V_F	$I_F = 2.0$ Amps, $T_J = 100^\circ\text{C}$		0.895	V
Reverse Current	I_R	$V_R = V_{RWM}$, $T_J = 25^\circ\text{C}$		2.0	μA
Reverse Current	I_R	$V_R = V_{RWM}$, $T_J = 100^\circ\text{C}$		50	μA
Reverse Recovery Time	t_{rr}	$I_F = 0.5$ A; $I_R = 1.0$ A; $I_{REC} = 0.25$ A		25	ns

Note 1: Short duration test pulse used to minimize self – heating effect.

PACKAGE DIMENSIONS


Ltr	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
A	0.029	0.039	0.73	0.99
B	0.016	0.026	0.40	0.66
C	0.070	0.080	1.77	2.03
D	0.087	0.097	2.21	2.46
E	0.020	0.030	0.50	0.76
F	0.051	0.061	1.29	1.54
G	0.021	0.031	0.53	0.78
H	0.004	0.008	0.10	0.20
J	0.070	0.080	1.77	2.03
K	0.035	0.045	0.89	1.14

MOUNTING PAD DIMENSIONS


Ltr	Dimensions	
	Inch	Millimeters
A	0.100	2.54
B	0.105	2.67
C	0.050	1.27
D	0.030	0.76
E	0.025	0.64



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331