



- Pletronics' THD3005-19.44M is a temperature compensated crystal oscillator
- Optional Voltage Control Function
- HCMOS output.
- The package is designed for high density surface mount designs.
- Tape and Reel packaging is available.
- Select Stratum-III frequencies available
- 3.2 x 5 mm LCC Ceramic Package
- Tape and Reel packaging is available.
- Select Stratum-III frequencies available

Pletronics Inc. certifies this device is in accordance with the RoHS 6/6 (2002/95/EC) and WEEE (2002/96/EC) directives.

Pletronics Inc. guarantees the device does not contain the following:
Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's
Weight of the Device: 0.10 grams
Moisture Sensitivity Level: 1 As defined in J-STD-020D.1
Second Level Interconnect code: e4

Absolute Maximum Ratings:

| Parameter | Unit |
|--------------------------------|---------------------------------|
| V _{CC} Supply Voltage | -0.5V to +6.5V |
| V _i Input Voltage | -0.5V to V _{CC} + 0.5V |
| V _o Output Voltage | -0.5V to V _{CC} + 0.5V |

Thermal Characteristics

The maximum die or junction temperature is 155°C
The thermal resistance junction to board is 30 to 50°C/Watt depending on the solder pads, ground plane and construction of the PCB.


ESD Rating

| Model | Minimum Voltage | Conditions |
|----------------------|-----------------|-------------------------|
| Human Body Model | 1500 | MIL-STD-883 Method 3115 |
| Charged Device Model | 1000 | JESD 22-C101 |


Electrical Specification for specified Vcc over the specified temperature range

| Item | Min | TYP | Max | Unit | Condition | |
|--|------------------------------------|------------------|-----------------------------|------------------|---|--|
| Frequency Range | | 19.44 | | MHz | | |
| Frequency Stability vs Temp. | -0.28 | | +0.28 | ppm | Vcontrol = 1.50 volts (Fmax-Fmin)/2 | |
| 24 Hour Holdover | -0.37 | | 0.37 | ppm | GR-1244-CORE | |
| Frequency Calibration | -0.5 | | +0.5 | ppm | Frequency offset at 25°C, 60 minutes after reflow | |
| Frequency Stability / Supply | -0.10 | | +0.10 | ppm | Load: 10K ohm // 10 pF & Vcc ± 5% | |
| Load Sensitivity | -0.20 | | +0.20 | ppm | ±2% variation in magnitude from 10K ohm ±10% 10 pF | |
| Long Term Stability (Aging) | -3.4 | | +3.4 | ppm | After 15 years. | |
| Output Waveform | CMOS | | | | | |
| Output V _{HIGH} as % of Supply | 90 | | | %V _S | Load: 10K ohm ± 10% // 10 pF | |
| Output V _{LOW} as % of Supply | | | 10 | %V _S | | |
| T _{RISE} and T _{FALL} (10% to 90%) | | | 6.5 | nS | | |
| Duty Cycle at 50% Supply | 40 | 50 | 60 | % | | |
| Phase Noise | 10 Hz 100 Hz 1 kHz 10 kHz | - - - - | -90 -115 -135 -145 | - - - - | dBc/Hz | Typical values for a 20.0 MHz oscillator at 25°C |
| Jitter | - | - | 1.7 | pS | 10 Hz to 1 MHz offset from carrier | |
| V Supply Range V _{CC} | 2.8 | - | 5.5 | Volts | | |
| Supply Current I _{CC} | - | - | 7.0 | mA | | |
| Vcontrol Range | 0.5 | | 2.50 | Volts | 1.50 volts nominal | |
| Frequency Pullability | ± 9.2 | ± 10.0 | - | ppm | | |
| Linearity | - | 0.05 | 2.0 | % | In accordance with MIL-PRF-55310 | |
| Operating Temperature Range | -40 | | +85 | °C | Specified by part number | |
| Storage Temperature Range | -55 | | +95 | °C | | |

Phase Noise:

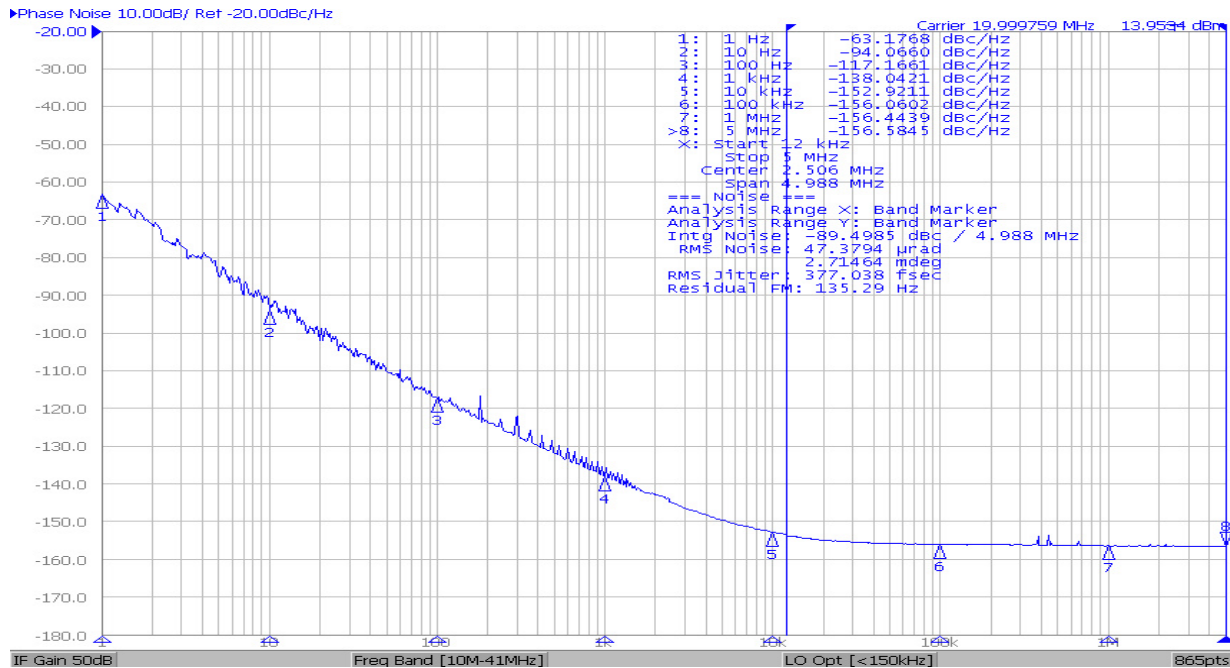

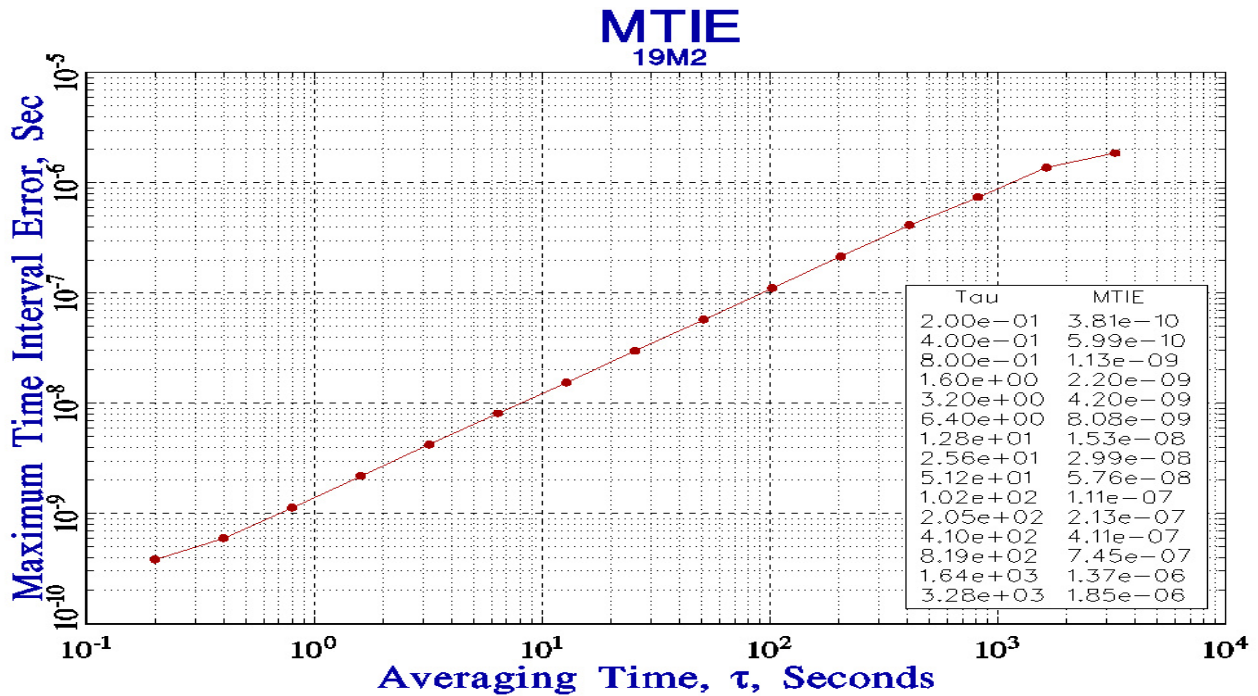

MTIE:



Reliability: Environmental Compliance

| Parameter | Condition |
|------------------|--------------------------------------|
| Mechanical Shock | MIL-STD-883 Method 2002, Condition B |
| Vibration | MIL-STD-883 Method 2007, Condition A |
| Solderability | MIL-STD-883 Method 2003 |
| Thermal Shock | MIL-STD-883 Method 1011, Condition A |

Package Labeling

| | |
|---|---|
| P/N:  | |
| THD3005-19.44M | |
| Customer P/N:  | |
| 12345678 | |
| Qty:  | D/C  |
| 1000 | TC512SA |
| MSL: 1 | |

| |
|---|
| <p>RoHS Compliant</p> <p>2nd LvL Interconnect</p> <p>Category=e4</p> <p>Max Safe Temp=260C for 10s 2X Max</p> |
|---|

Label is 1" x 2.6" (25.4mm x 66.7mm)
Font is Courier New
Bar code is 39-Full ASCII

Label is 1" x 2.6" (25.4mm x 66.7mm)
Font is Arial

Part Marking:

fff.yww
• PLExx.xxxx


or

fff.yww
• PLExx.xxxx

fff.yww = frequency in MHz . Year week
PLE = Pletronics
xx.xxxx = internal code

* Marking will show 38.88 MHz Frequency. Actual output will be 19.44 MHz.

Mechanical:

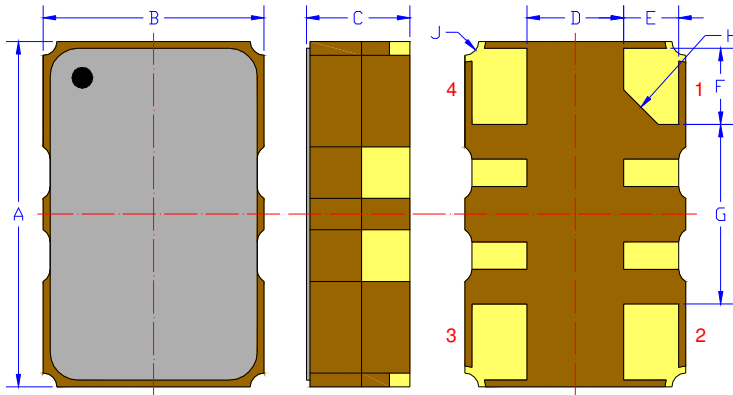

| | Inches | mm |
|----------------|--------------|------------|
| A | 0.197 ±0.008 | 5.00 ±0.20 |
| B | 0.126 ±0.008 | 3.20 ±0.20 |
| C | 0.059 max | 1.50 max |
| D ¹ | 0.055 | 1.40 |
| E ¹ | 0.031 | 0.80 |
| F ¹ | 0.043 | 1.10 |
| G ¹ | 0.102 | 2.60 |
| H ¹ | 0.013C | 0.50C |
| J ¹ | 0.008 | 0.20R |


| Pad | Function | Note |
|-----|-----------------------------------|--|
| 1 | Vcontrol Input | If this function is not specified, recommend connecting this pad to ground. |
| 2 | Ground (GND) | |
| 3 | Output | |
| 4 | Supply Voltage (V _{CC}) | Connect an appropriate power supply bypass capacitors as close as possible. |
| - | N. C. | All other pads on the bottom shall not be connected. These are internally connected and were for the TCXO compensation process |

Layout and application information


All connection points in the designated region have solder mask cover to avoid any electrical connections

For Optimum Stability and Jitter Performance, Pletronics recommends:

- a ground plane under the device
- no large transient signals (both current and voltage) should be routed under the device
- do not layout near a large magnetic field such as a high frequency switching power supply
- do not place near piezoelectric buzzers or mechanical fans.
- minimize air flow across the device



Reflow Cycle (typical for lead free processing)

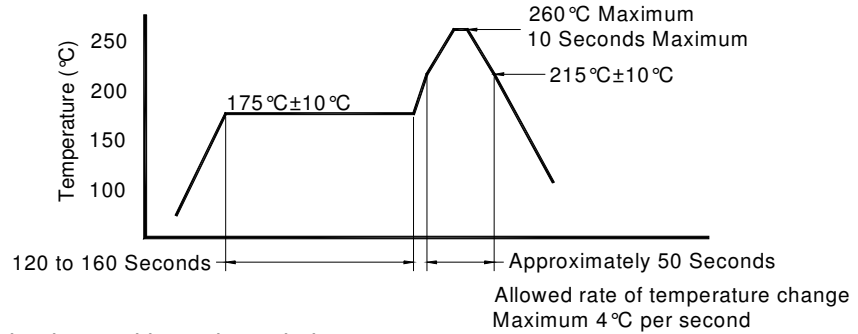



The part may be reflowed 2 times without degradation.

Tape and Reel: available for quantities of 250 to 1000 per reel, cut tape for < 250

| Constant Dimensions Table 1 | | | | | | | | |
|-----------------------------|-----|--------------|------|-----|--------------|--------|-------|--------|
| Tape Size | D0 | D1 Min | E1 | P0 | P2 | S1 Min | T Max | T1 Max |
| 8mm | 1.5 | 1.0 | 1.75 | 4.0 | 2.0 ±0.05 | 0.6 | 0.6 | 0.1 |
| 12mm | | 1.5 | | | 2.0 ±0.1 | | | |
| 16mm | | +0.1 -0.0 | | | ±0.1 | | | |
| 24mm | | 1.5 | | | ±0.1 | | | |

| Variable Dimensions Table 2 | | | | | | | |
|-----------------------------|--------|--------|-----------|-----------|--------|-------|-------------|
| Tape Size | B1 Max | E2 Min | F | P1 | T2 Max | W Max | Ao, Bo & Ko |
| 16 mm | 12.1 | 14.25 | 7.5 ± 0.1 | 8.0 ± 0.1 | 8.0 | 16.3 | Note 1 |

Note 1: Embossed cavity to conform to EIA-481-B Dimensions in mm Not to scale

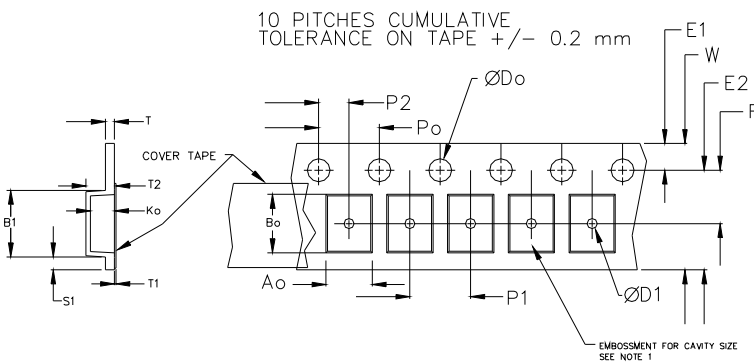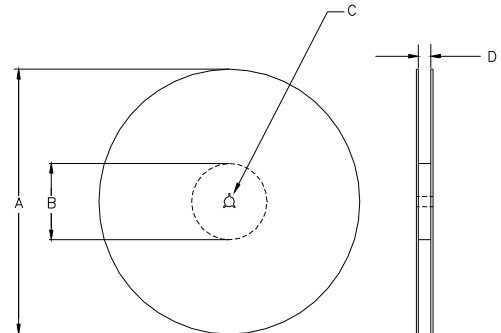

| REEL DIMENSIONS | | | | | |
|-----------------|--------|----------------------|----------------------|----------------------|------------|
| A | inches | 7.0 | 10.0 | 13.0 | Tape Width |
| | mm | 177.8 | 254.0 | 330.2 | |
| B | inches | 2.50 | 4.00 | 3.75 | Tape Width |
| | mm | 63.5 | 101.6 | 95.3 | |
| C | mm | 13.0 +0.5 / -0.2 | | | Tape Width |
| D | mm | 16.4 +2.0 -0.0 | 16.4 +2.0 -0.0 | 16.4 +2.0 -0.0 | |

Reel dimensions may vary from the above

USER DIRECTION OF UNREELING →

IMPORTANT NOTICE

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

Contacting Pletronics Inc.

Pletronics Inc.
19013 36th Ave. West
Lynnwood, WA 98036-5761 USA

Tel: 425-776-1880
Fax: 425-776-2760
E-mail: ple-sales@pletronics.com
URL: www.pletronics.com

Copyright © 2011, Pletronics Inc.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331