

# GB2X50MPS12-227

1200V 100A SiC Schottky MPS™ Diode



## Silicon Carbide Schottky Diode

$V_{RRM}$	=	1200 V
$I_F (T_C = 100^\circ\text{C})$	=	152 A *
$Q_C$	=	220 nC *



### Features

- High Avalanche (UIS) Capability
- Enhanced Surge Current Capability
- Superior Figure of Merit  $Q_C/I_F$
- 3000 V Isolation with Low Thermal Resistance
- 175 °C Maximum Operating Temperature
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient of  $V_F$
- Extremely Fast Switching Speed

### Advantages

- Low Standby Power Losses
- Improved Circuit Efficiency (Lower Overall Cost)
- Low Switching Losses
- Ease of Paralleling without Thermal Runaway
- Smaller Heat Sink Requirements
- Low Reverse Recovery Current
- Low Device Capacitance
- Low Reverse Leakage Current

### Package



SOT-227 (Isolated Base)



### Applications

- Boost Diode in Power Factor Correction (PFC)
- Switched Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Motor Drives
- Freewheeling / Anti-parallel Diode in Inverters
- Solar Inverters
- Electric Vehicles (EV) & DC Fast Charging
- Induction Heating & Welding

### Absolute Maximum Ratings (At $T_C = 25^\circ\text{C}$ Unless Otherwise Stated)

Parameter	Symbol	Conditions	Values	Unit
Repetitive Peak Reverse Voltage (Per Leg)	$V_{RRM}$		1200	V
Continuous Forward Current (Per Leg / Per Device)	$I_F$	$T_C = 25^\circ\text{C}, D = 1$	115 / 230	A
		$T_C = 100^\circ\text{C}, D = 1$	76 / 152	
		$T_C = 138^\circ\text{C}, D = 1$	50 / 100	
Non-Repetitive Peak Forward Surge Current, Half Sine Wave (Per Leg)	$I_{F,SM}$	$T_C = 25^\circ\text{C}, t_P = 10\text{ ms}$	400	A
		$T_C = 150^\circ\text{C}, t_P = 10\text{ ms}$	320	
Repetitive Peak Forward Surge Current, Half Sine Wave (Per Leg)	$I_{F,RM}$	$T_C = 25^\circ\text{C}, t_P = 10\text{ ms}$	240	A
		$T_C = 150^\circ\text{C}, t_P = 10\text{ ms}$	168	
Non-Repetitive Peak Forward Surge Current (Per Leg)	$I_{F,max}$	$T_C = 25^\circ\text{C}, t_P = 10\ \mu\text{s}$	2000	A
$i^2t$ Value (Per Leg)	$\int i^2 dt$	$T_C = 25^\circ\text{C}, t_P = 10\text{ ms}$	800	$\text{A}^2\text{s}$
Non-Repetitive Avalanche Energy (Per Leg)	$E_{AS}$	$L = 0.5\text{ mH}, I_{AS} = 50\text{ A}$	600	mJ
Diode Ruggedness (Per Leg)	$dV/dt$	$V_R = 0 \sim 960\text{ V}$	200	V/ns
Power Dissipation (Per Leg / Per Device)	$P_{tot}$	$T_C = 25^\circ\text{C}$	384 / 768	W
Operating and Storage Temperature	$T_j, T_{stg}$		-55 to 175	$^\circ\text{C}$

\* Per Device

# GB2X50MPS12-227

1200V 100A SiC Schottky MPS™ Diode




## Electrical Characteristics (Per Leg)


Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Diode Forward Voltage	$V_F$	$I_F = 50 \text{ A}, T_j = 25 \text{ }^\circ\text{C}$		1.5	1.8	V
		$I_F = 50 \text{ A}, T_j = 175 \text{ }^\circ\text{C}$		2	2.4	
Reverse Current	$I_R$	$V_R = 1200 \text{ V}, T_j = 25 \text{ }^\circ\text{C}$		5	25	$\mu\text{A}$
		$V_R = 1200 \text{ V}, T_j = 175 \text{ }^\circ\text{C}$		50	250	
Total Capacitive Charge	$Q_C$	$V_R = 400 \text{ V}$		78		nC
		$I_F \leq I_{F,MAX}$ $di_F/dt = 200 \text{ A}/\mu\text{s}$ $T_j = 175 \text{ }^\circ\text{C}$ $V_R = 800 \text{ V}$		110		
Switching Time	$t_s$	$V_R = 400 \text{ V}$		< 10		ns
		$V_R = 800 \text{ V}$				
Total Capacitance	C	$V_R = 1 \text{ V}, f = 1 \text{ MHz}$		226		pF
		$V_R = 800 \text{ V}, f = 1 \text{ MHz}$		163		

## Thermal / Package Characteristics


Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Thermal Resistance, Junction – Case (Per Leg)	$R_{thJC}$			0.39		$^\circ\text{C}/\text{W}$
Weight	$W_T$			28		g
Mounting Torque	$T_M$	Screws to Heatsink			1.5	Nm
		Terminal Connection (M4)			1.3	
Isolation Voltage (RMS)	$V_{ISO}$	$t = 1 \text{ s (50 / 60 Hz)}$	3000			V
		$t = 60 \text{ s (50 / 60 Hz)}$	2500			
Creepage Distance on Surface	$d_{Ctt}$	Terminal to Terminal	10.5			mm
	$d_{Ctb}$	Terminal to Backside	8.5			
Striking Distance Through Air	$d_{Stt}$	Terminal to Terminal	3.2			mm
	$d_{Stb}$	Terminal to Backside	6.8			

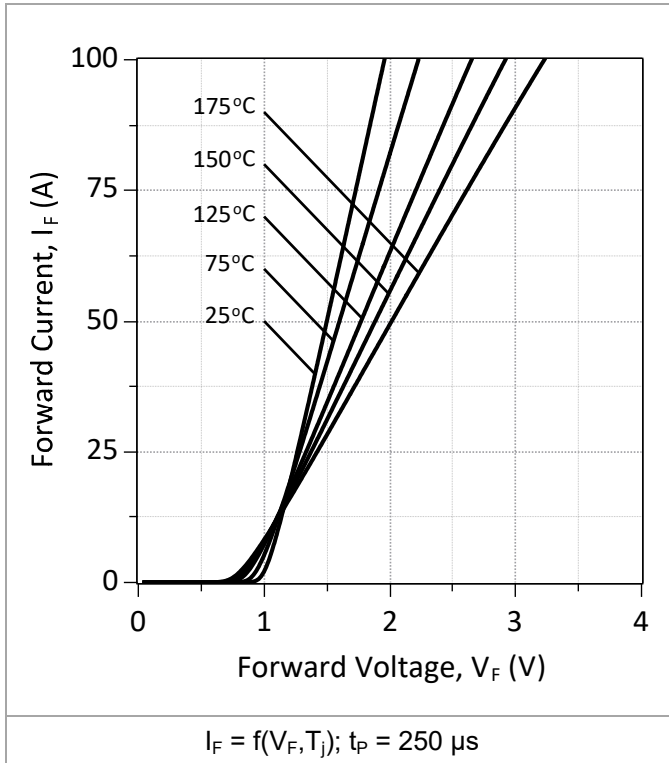


**Figure 1: Typical Forward Characteristics (Per Leg)**

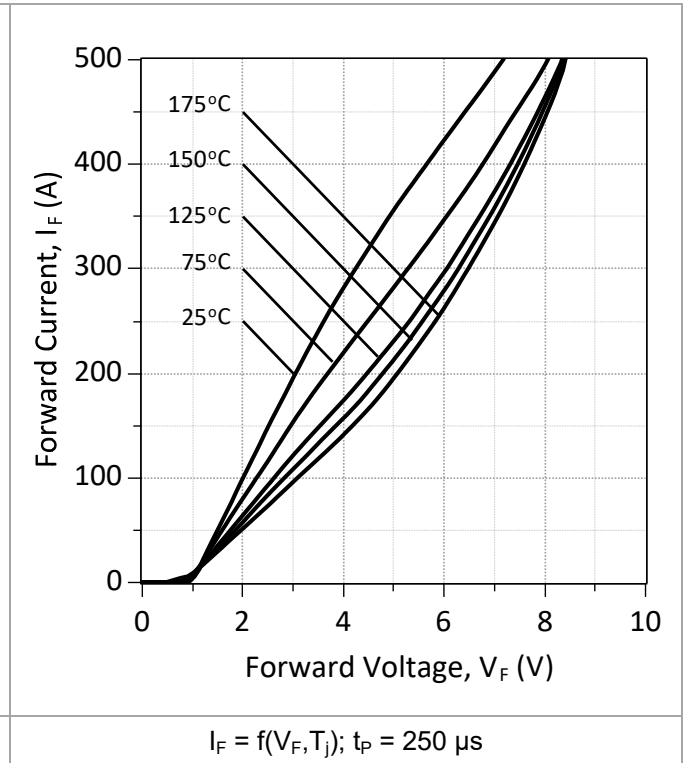


**Figure 2: Typical High Current Forward Characteristics (Per Leg)**

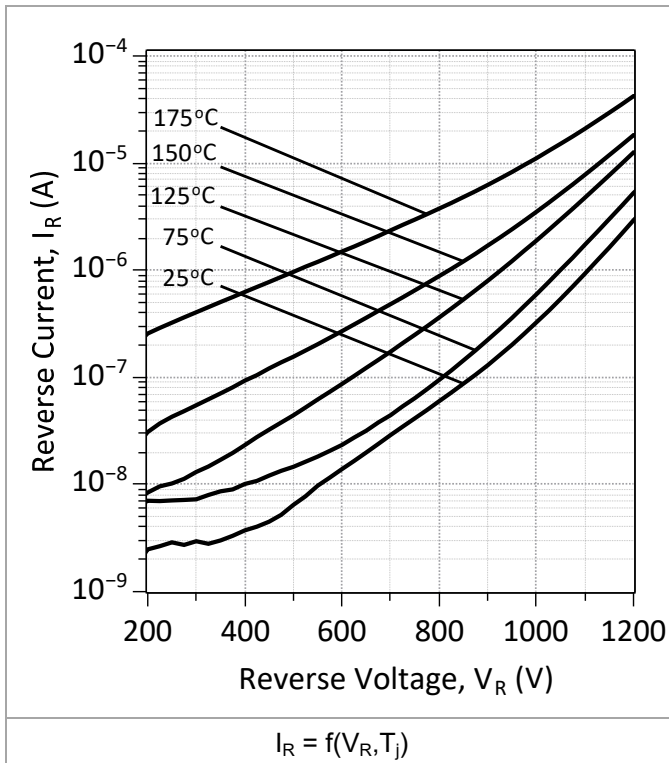

**Figure 3: Typical Reverse Characteristics (Per Leg)**

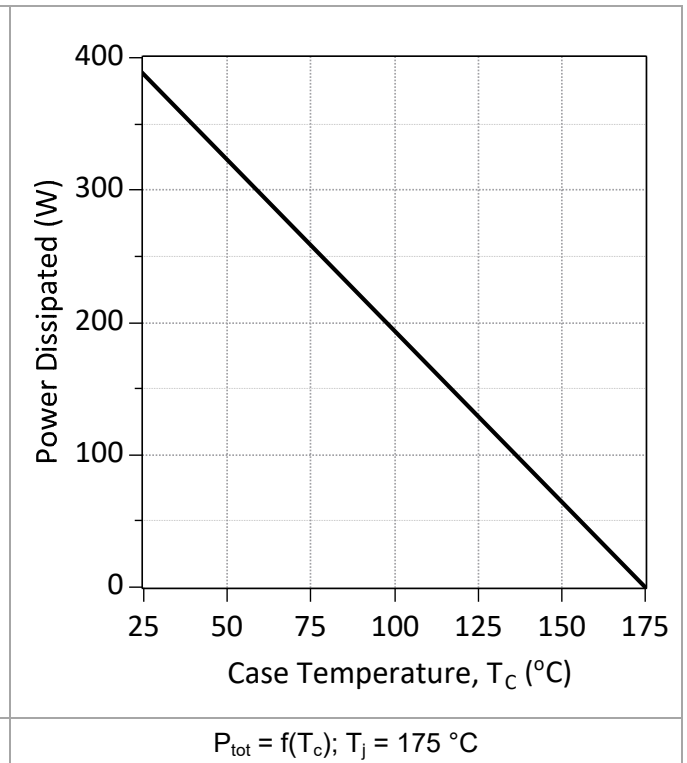


**Figure 4: Power Derating Curve (Per Leg)**

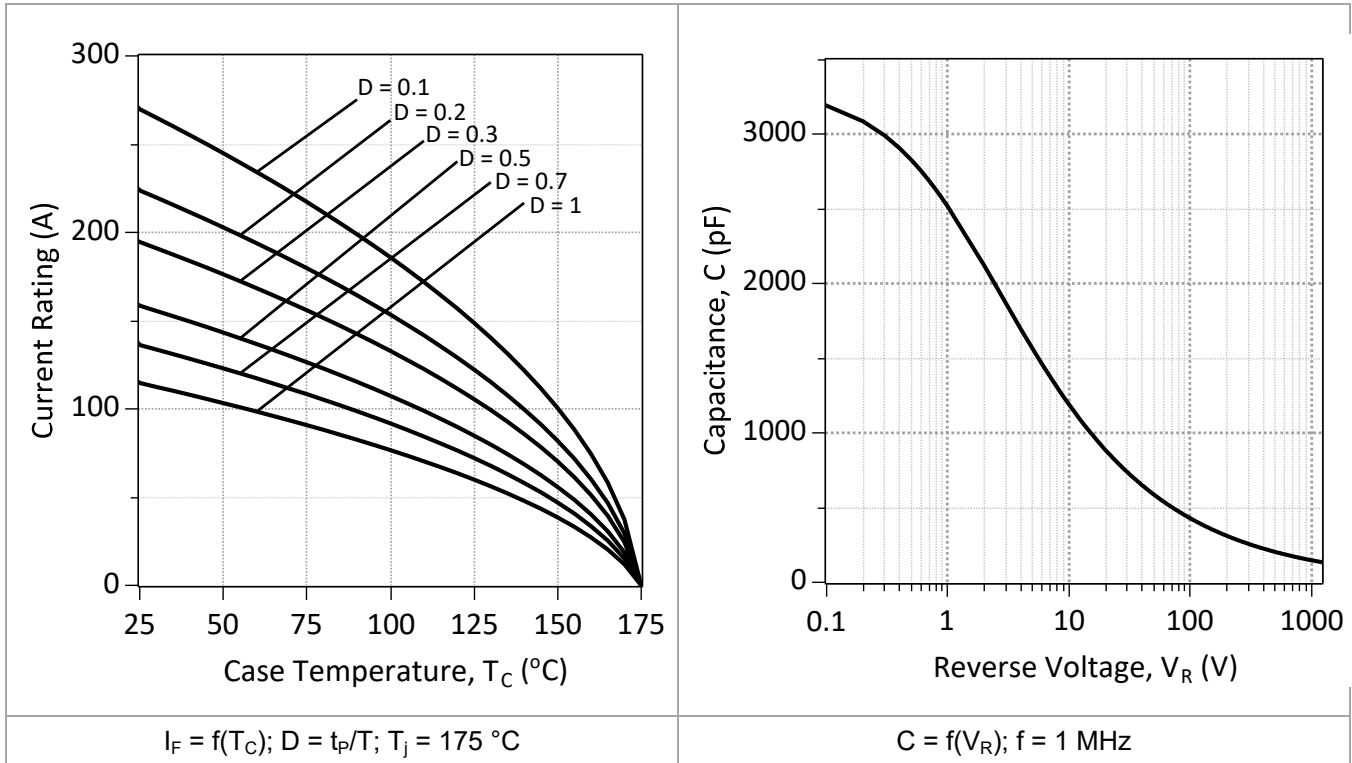


**Figure 5: Current Derating Curves (Per Leg)**

**Figure 6: Typical Junction Capacitance vs. Reverse Voltage Characteristics (Per Leg)**

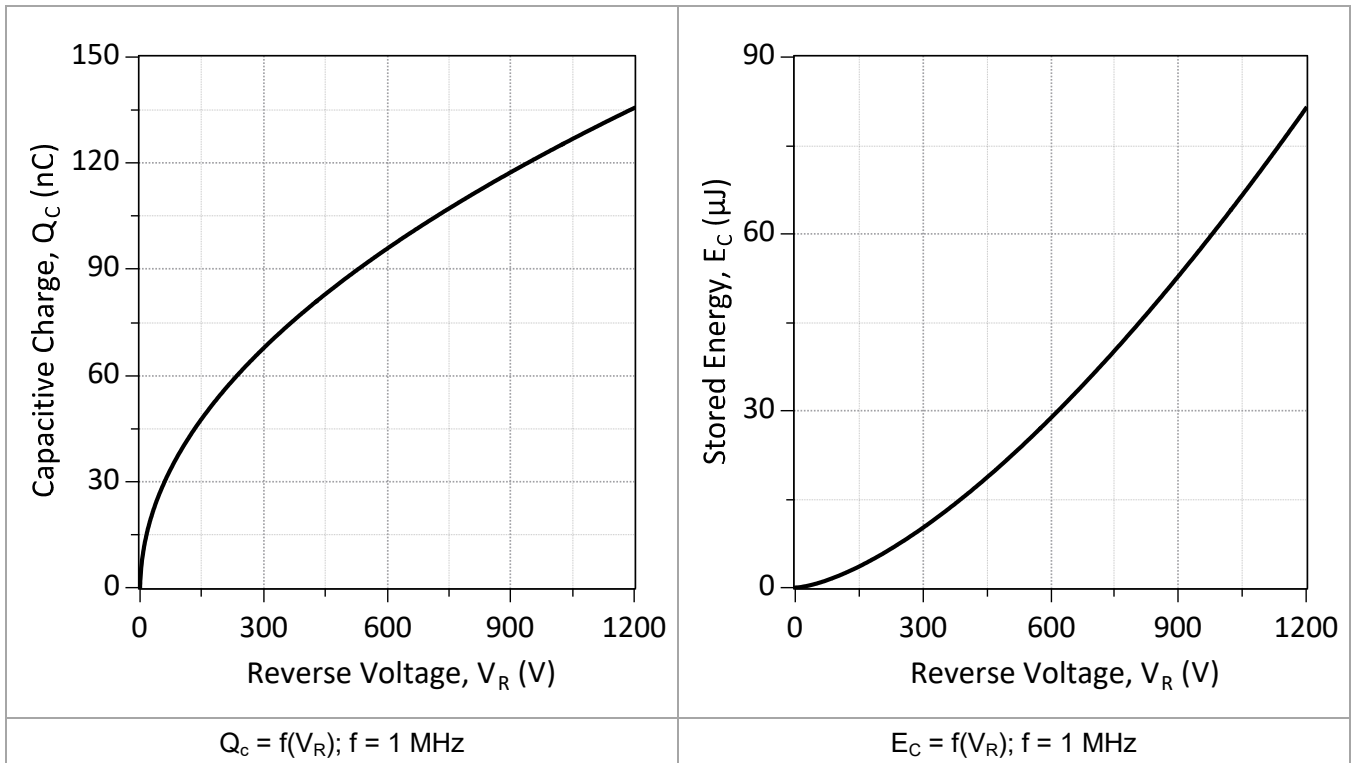


**Figure 7: Typical Capacitive Charge vs. Reverse Voltage Characteristics (Per Leg)**

**Figure 8: Typical Capacitive Energy vs. Reverse Voltage Characteristics (Per Leg)**

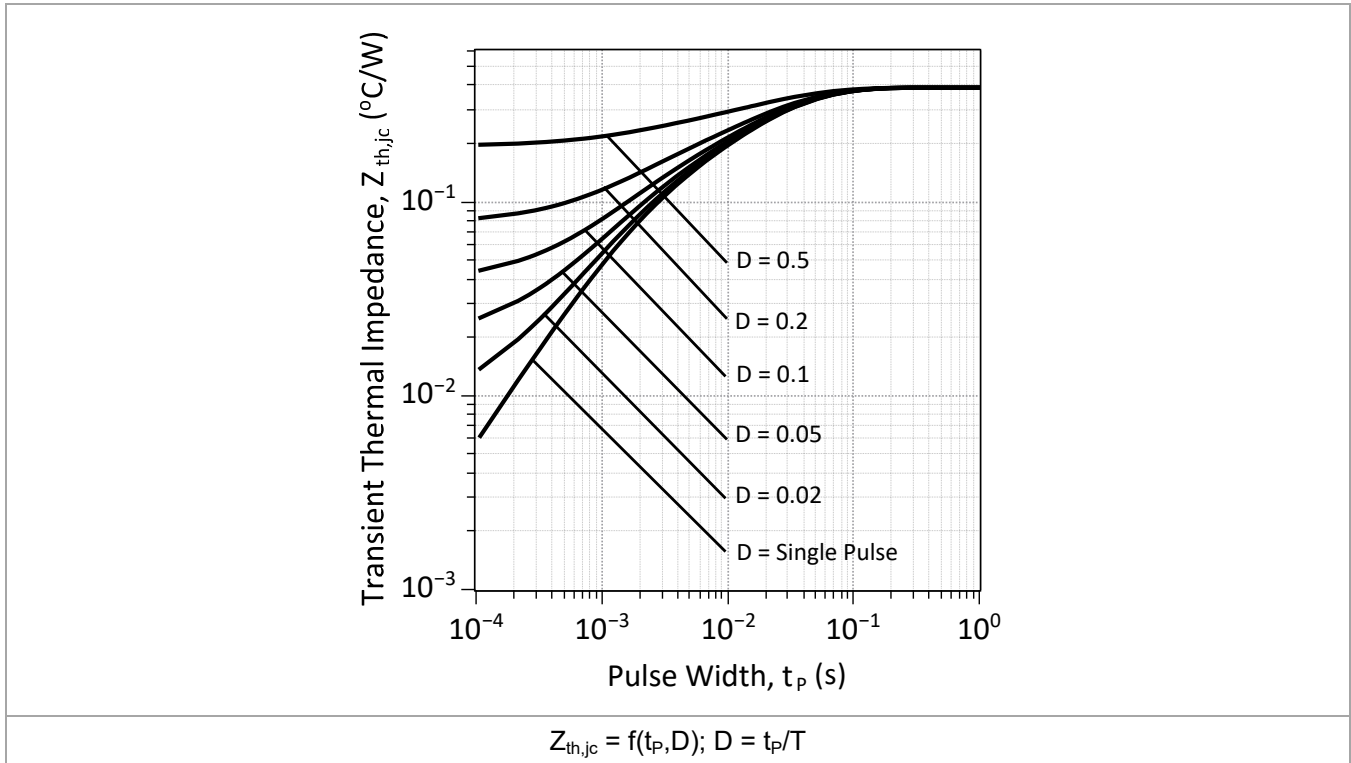

**Figure 9: Transient Thermal Impedance (Per Leg)**

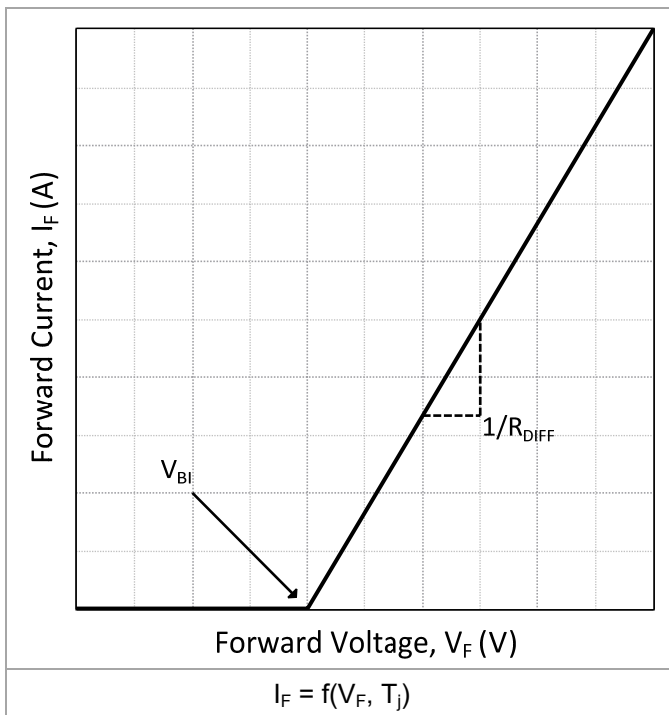

$$I_F = (V_F - V_{Bi})/R_{DIFF} \text{ (A)}$$

**Built-In Voltage ( $V_{Bi}$ ):**

$$V_{Bi}(T_j) = m \cdot T_j + n \text{ (V)},$$

$$m = -1.47e-03, n = 1.08$$

**Differential Resistance ( $R_{DIFF}$ ):**

$$R_{DIFF}(T_j) = a \cdot T_j^2 + b \cdot T_j + c \text{ (}\Omega\text{);}$$

$$a = 2.87e-07, b = 3.40e-05, c = 0.0076$$

**Figure 10: Forward Curve Model (Per Leg)**


**GB2X50MPS12-227**  
 1200V 100A SiC Schottky MPS™ Diode



**Package Dimensions**

**SOT-227**

**Package Outline**

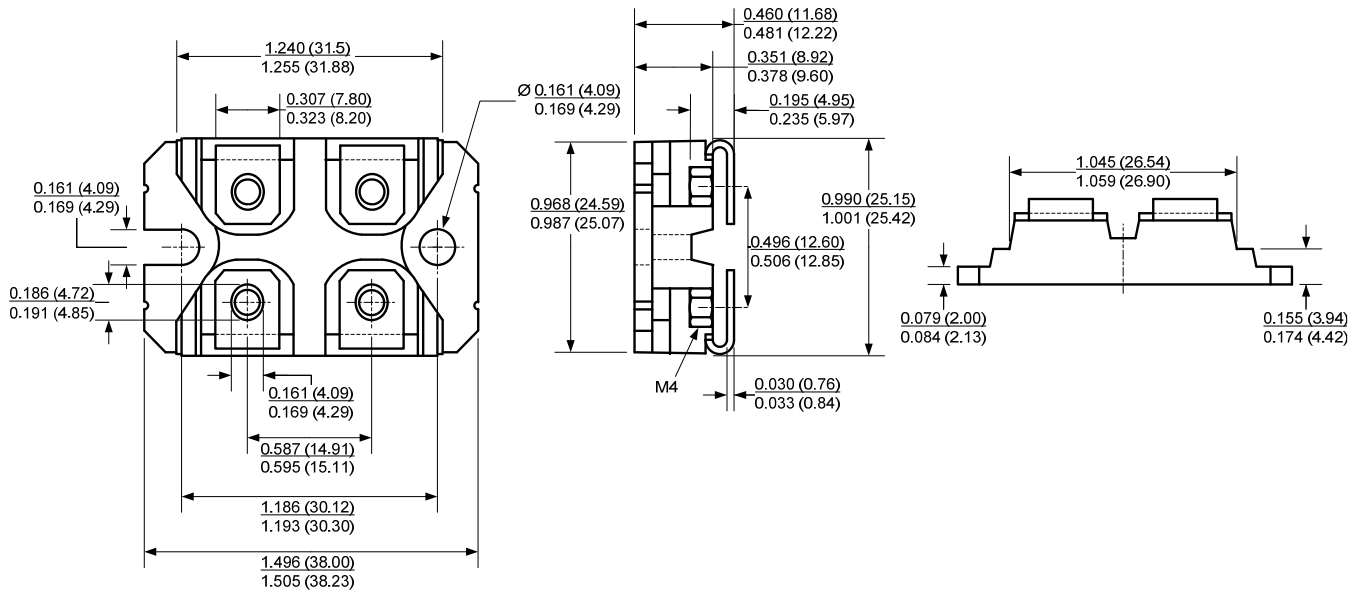

**NOTE**

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

## GB2X50MPS12-227

1200V 100A SiC Schottky MPS™ Diode



### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS 2), as adopted by EU member states on January 2, 2013 and amended on March 31, 2015 by EU Directive 2015/863. RoHS Declarations for this product can be obtained from your GeneSiC representative.

### REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a GeneSiC representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control systems.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

### Related Links

- SPICE Models: <https://www.genesicsemi.com/schottky-mps>
- Evaluation Boards: <https://www.genesicsemi.com/technical-support>
- Quality Manual: <https://www.genesicsemi.com/technical-support/quality-manual>
- Compliance: <https://www.genesicsemi.com/technical-support/compliance>
- Reliability Report: <https://www.genesicsemi.com/technical-support/reliability>

[www.genesicsemi.com/schottky-mps](https://www.genesicsemi.com/schottky-mps)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[GB2X50MPS12-227](#)





## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331