


Photologic® Slotted Optical Switch



OPB615, OPB616, OPB617, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)



Features:

- Non-contact switching
- PCBoard mounting
- Enhanced signal to noise ratio
- Choice of four Logical output options

Description:

Each OPB615, OPB625 and OPB665 series slotted optical switch consists of an 890 nm, infrared Light Emitting Diode (LED) and a monolithic integrated circuit that incorporates a photodiode, a linear amplifier and a Schmitt trigger on a single silicon chip. OPB655 offers two mounting options—no tabs (N) or two tabs (T).

All devices in this series exhibit performance over supply voltages ranging from 4.5 V to 16.0 V, and may be specified as Buffered or Inverted with 10 Kw Pull-up or Open Collector output. Devices are also TTI/LST TL compatible and can drive up to 10 TTL loads.

Custom electrical, wire and cabling and connectors are available. Contact your local representative or OPTEK for more information.

Applications:

- Mechanical switch replacement
- Speed indication (tachometer)
- Mechanical limit indication
- Edge sensing

| Ordering Information | | | | | |
|----------------------|--------------------|--------------------|---------------------------|--------------------|-----------------------|
| Part Number | Package Style | Sensor Photologic® | Aperture Emitter / Sensor | Slot Width / Depth | Lead Length / Spacing |
| OPB615 | N | 10K Pull-up | None | 0.150" / 0.240" | 0.100" (min) / 0.275" |
| OPB616 | | Open Collector | | | |
| OPB617 | | Inv-10K Pull-up | | | |
| OPB618 | | Inv-Open Collector | | | |
| OPB625 | | 10K Pull-up | None | 0.190" / 0.285" | 0.100" (min) / 0.320" |
| OPB626 | | Open Collector | | | |
| OPB627 | | Inv-10K Pull-up | | | |
| OPB628 | | Inv-Open Collector | | | |
| OPB665N | 10K Pull-up | 0.05"/ 0.01" | 0.125" / 0.345" | | |
| OPB666N | Open Collector | | | | |
| OPB667N | Inv-10K Pull-Up | | | | |
| OPB668N | Inv-Open Collector | | | | |
| OPB665T | T | | | 10K Pull-up | |
| OPB666T | | | | Open Collector | |
| OPB667T | | | | Inv-10K Pull-up | |
| OPB668T | | | | Inv-Open Collector | |



RoHS

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)


OPB615/625/665N Buffered 10K Pull-Up

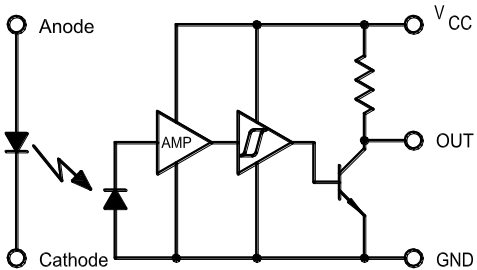


Photologic with Pull-Up-Resistor Inverted Output

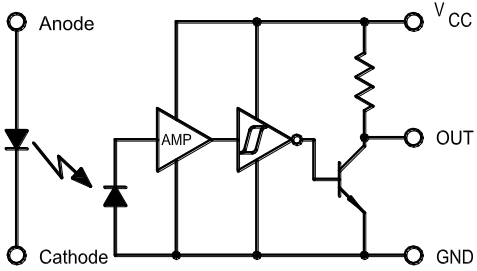


OPB 616/626/666N Buffered Open-Collector

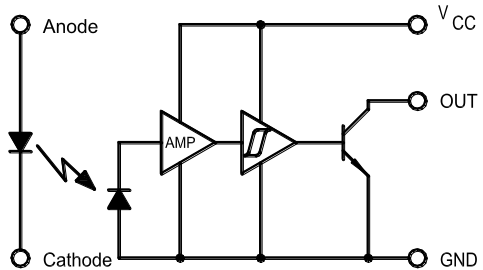

Photologic with Open Collector Inverted Output

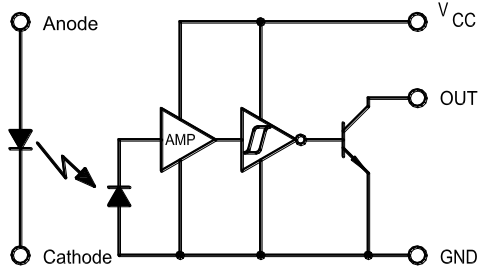

OPB615, OPB616, OPB617, OPB618

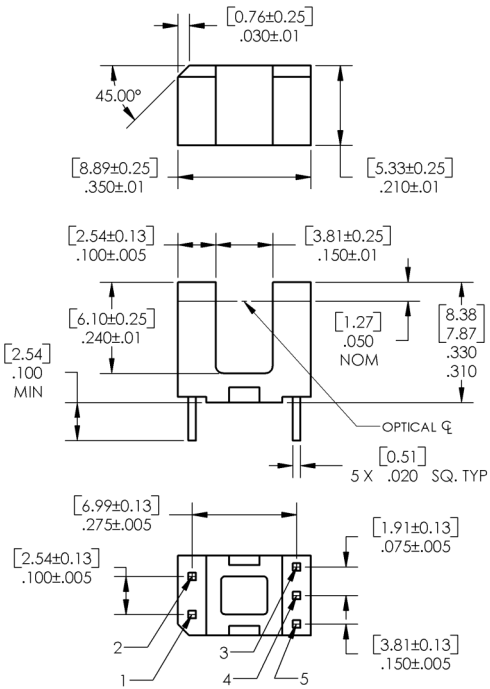

| Pin Color/Number | Description |
|------------------|-------------|
| 1 | Anode |
| 2 | Cathode |
| 3 | Vcc |
| 4 | Output |
| 5 | Ground |

DIMENSIONS ARE IN: [MILLIMETERS]
INCHES

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)

OPB625, OPB626, OPB627, OPB628

| Pin Color/ Number | Description |
|----------------------|-------------|
| 1 | Anode |
| 2 | Cathode |
| 3 | Vcc |
| 4 | Output |
| 5 | Ground |

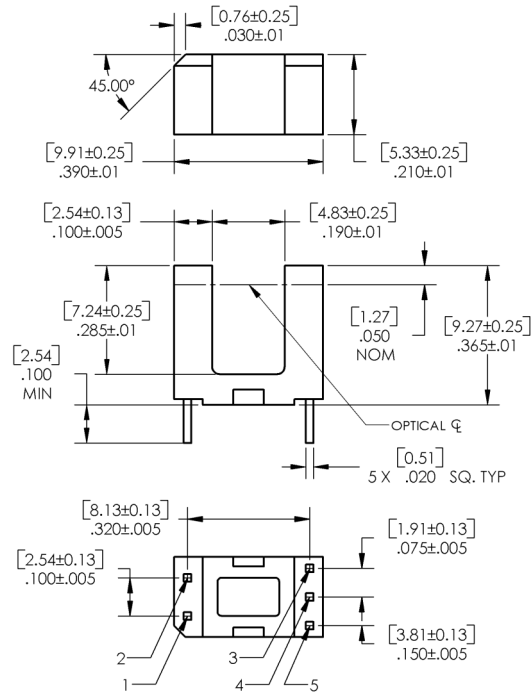

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)

OPB665, OPB666, OPB667, OPB668 (N and T)

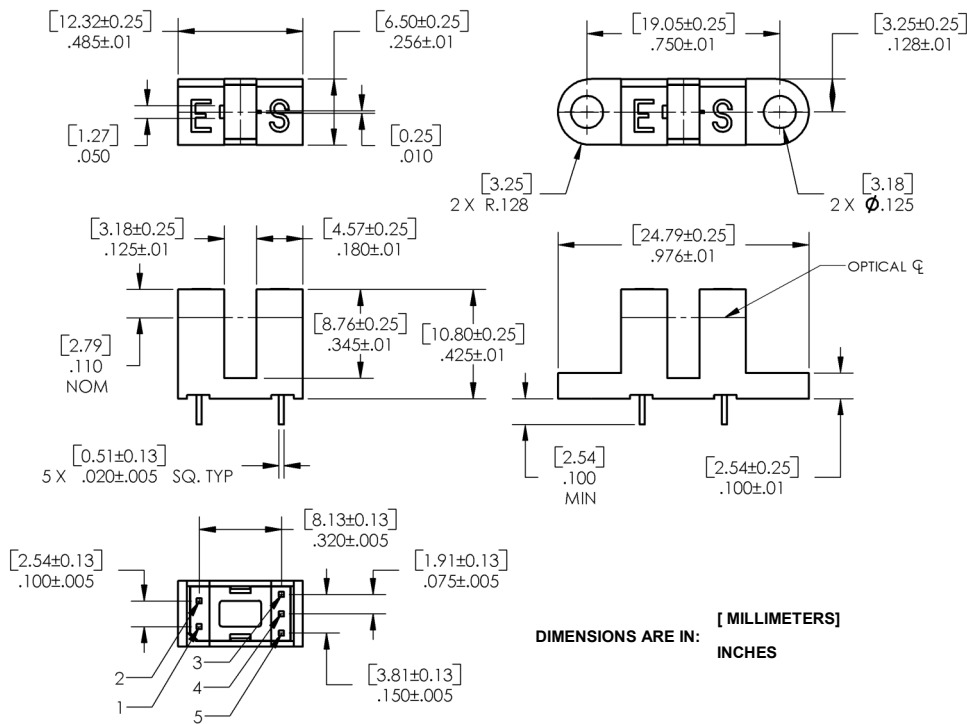

| Pin Color/Number | Description |
|------------------|-------------|
| 1 | Anode |
| 2 | Cathode |
| 3 | Vcc |
| 4 | Output |
| 5 | Ground |

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006
 Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch



OPB615, OPB616, OPB617, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)

| Absolute Maximum Ratings (T _A = 25° C unless otherwise noted) | |
|--|-------------------|
| Storage & Operating Temperature Range | -40° C to +100° C |
| Lead Soldering Temperature (1/16 inch (1.6mm) from the case for 5 sec. with soldering iron) ⁽¹⁾ | 260° C |
| Input Diode | |
| Forward DC Current | 50 mA |
| Peak Forward Current (1 μs pulse width, 300 pps) | 3 A |
| Reverse DC Voltage | 3 V |
| Power Dissipation ⁽²⁾ | 100 mW |
| Output Photologic® | |
| Supply Voltage, V _{CC} | 18 V |
| Duration of Output Short to V _{CC} | 1 second |
| Voltage at Output ⁽⁵⁾ | V _{CC} |
| Low Level Output Current (sinking) | 16 mA |
| Power Dissipation ⁽³⁾ | 240° mW |

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
- (2) Derate linearly 1.33 mW/° C above 25° C.
- (3) Derate linearly 2.50 mW/° C above 25° C.
- (4) Normal application would be with light source blocked, simulated by I_F = 0 mA.
- (5) Open Collector devices = 30 volts

| Electrical Characteristics (T _A = 25° C unless otherwise noted) | | | | | | | |
|--|--------------------------------------|------------|------|------|------|-------|------------------------|
| SYMBOL | PARAMETER | | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| Input Diode | | | | | | | |
| V _F | Forward Voltage | | - | - | 1.6 | V | I _F = 10 mA |
| I _R | Reverse Current | | - | - | 100 | μA | V _R = 3 V |
| Output Photologic® Sensor | | | | | | | |
| V _{CC} | Operating DC Supply Voltage | | 4.5 | - | 16 | V | |
| I _{F(+)} | LED Positive-Going Threshold Current | OPB615-618 | 0.1 | 0.55 | 3 | mA | V _{CC} = 5 V |
| | | OPB625-628 | 0.1 | 0.6 | 3 | | |
| | | OPB665-668 | 0.1 | 1.6 | 10 | | |
| I _{F(+)} /I _{F(-)} | Hysteresis | | 1.05 | 1.20 | 1.90 | | V _{CC} = 5 V |

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch



OPB615, OPB616, OPB617, OPB618 Series

OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)

| Electrical Characteristics (T _A = 25° C unless otherwise noted) | | | | | | | |
|--|--|--|--------------------------|-----|-----|-------|--|
| SYMBOL | PARAMETER | | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| Output Photologic® Sensor | | | | | | | |
| I _{CCH} | High Level Supply Current: Buffer, 10k Pull-up | | - | 5 | 12 | mA | NO LOAD on Output ⁽³⁾ |
| | Buffer, Open-Collector | | - | 5 | 12 | | |
| I _{CCH} | Inverted, 10k Pull-up | | - | 4 | 12 | mA | NO LOAD on Output I _F = 0 mA |
| | Inverted, Open-Collector | | - | 4 | 12 | | |
| I _{CCL} | Low Level Supply Current: Buffer, 10k Pull-up | | - | 5.5 | 12 | mA | NO LOAD on Output I _F = 0 mA |
| | Buffer, Open-Collector | | - | 4.0 | 12 | | |
| I _{CCL} | Inverted, 10k Pull-up | | - | 6.5 | 12 | mA | NO LOAD on Output ⁽³⁾ |
| | Inverted, Open-Collector | | - | 5.0 | 12 | | |
| V _{OH} | High Level Output Voltage: Buffer, 10k Pull-up | | V _{CC} - 1.5 | - | - | V | I _{OH} = 100 μA ⁽³⁾ |
| | Buffer, Open-Collector | | - | - | - | | |
| V _{OH} | Inverter, 10k Pull-up | | V _{CC} - 1.5 | - | - | V | I _{OH} = 100 μA ⁽¹⁾ I _F = 0 mA |
| | Inverter, Open-Collector | | - | - | - | | |
| I _{OH} | High Level Output Voltage: Buffer, Open-Collector | | - | - | 100 | μA | V _{OH} = 30 V ⁽³⁾ |
| | Inverter, Open-Collector | | - | - | 100 | | |
| V _{OL} | Low Level Output Voltage: Buffer, 10k Pull-up | | - | - | 0.4 | V | I _{OL} = 16 mA, V _{CC} = 4.5 V ⁽³⁾⁽¹⁾ |
| | Buffer, Open-Collector | | - | - | 0.4 | | |
| V _{OL} | Inverter, 10k Pull-up | | - | - | 0.4 | V | I _{OL} = 16 mA, I _F = 0 mA |
| | Inverter, Open-Collector | | - | - | 0.4 | | |
| t _r , t _f | Output Rise Time, Output Fall Time | | | 30 | | ns | f = 10 kHz, R _L = 300 Ω, DC = 50% ⁽³⁾ |
| t _{PLH} | Propagation Delay, Low-High Buffer, 10k Pull-up | | | 0.6 | | μs | |
| | Buffer, Open-collector | | | | | | |
| t _{PLH} | Inverter, 10k Pull-up | | | 3.0 | | μs | |
| | Inverter, Open-Collector | | | | | | |
| t _{PHL} | Propagation Delay, High-Low Buffer, 10k Pull-up | | | 3.0 | | μs | |
| | Buffer, Open-collector | | | | | | |
| t _{PHL} | Inverter, 10k Pull-up | | | 0.6 | | μs | |
| | Inverter, Open-Collector | | | | | | |
| Data Rate | | | | 100 | | kHz | R _L = 300 Ω, DC = 50% ⁽⁴⁾ |

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)




OPB615 - Flag next to Emitter

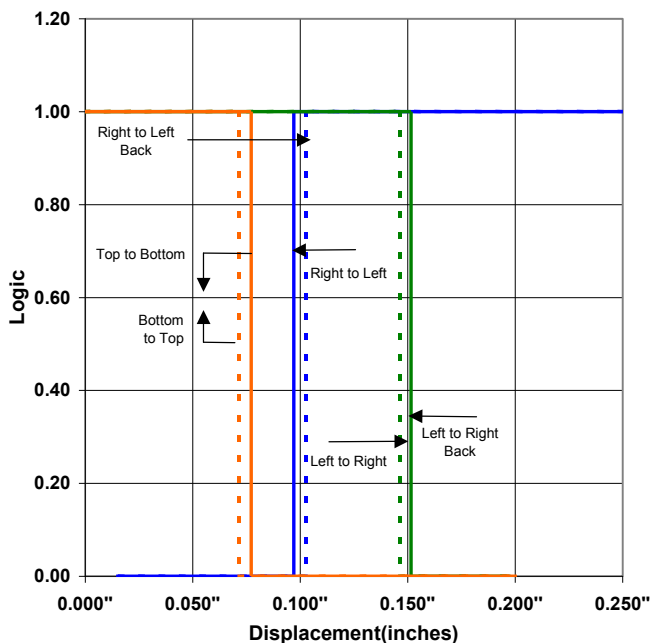

OPB615 - Flag next to Sensor

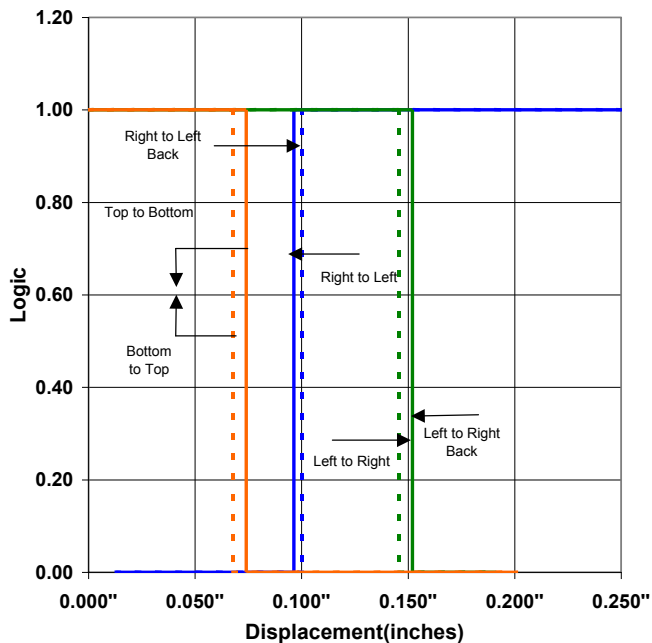

OPB615 - Flag in Middle of Slot

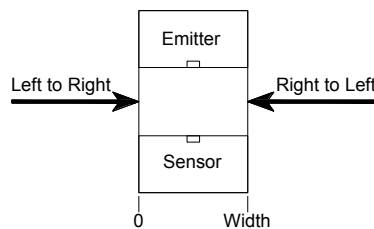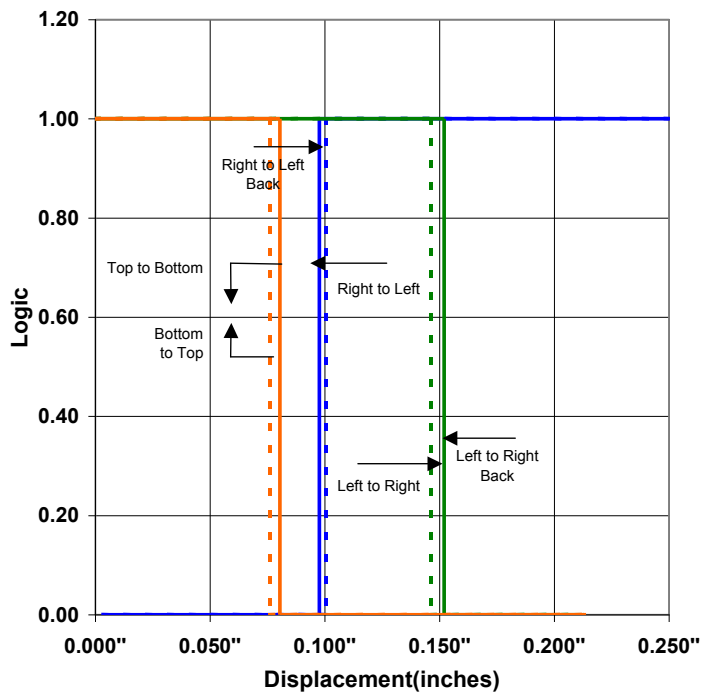

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
 1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)



OPB625 - Flag Next to Emitter

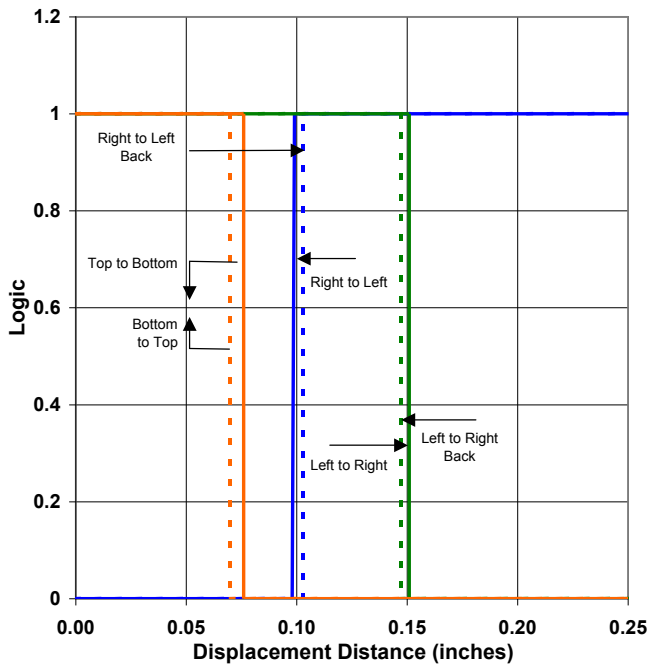

OPB625 - Flag Next to Sensor

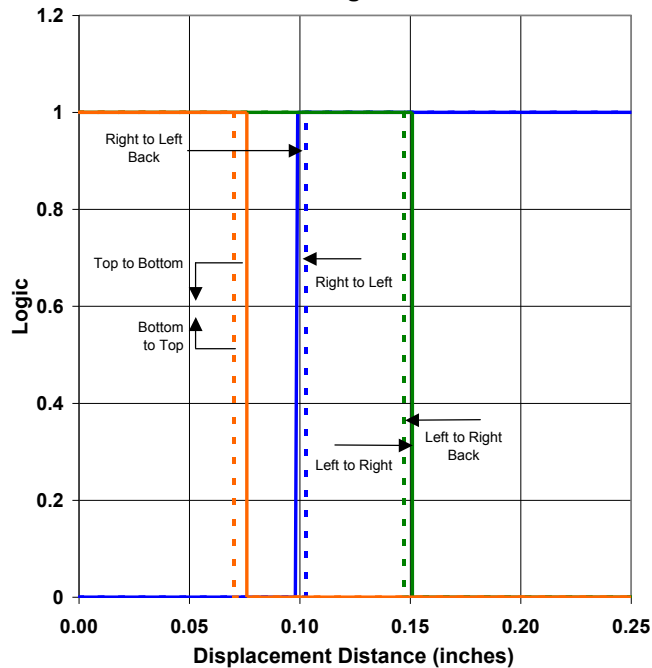

OPB625 - Flag in Middle of Slot

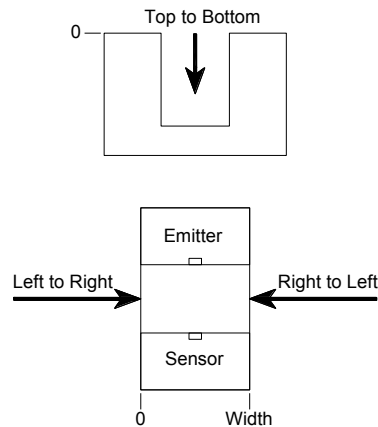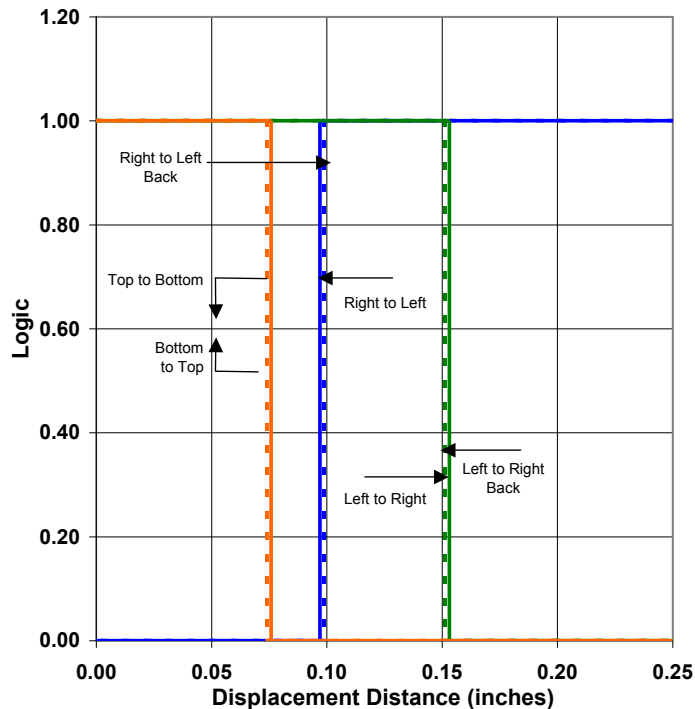

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Photologic® Slotted Optical Switch




OPB615, OPB616, OPB617, OPB618 Series


OPB625, OPB626, OPB627, OPB628 Series

OPB665, OPB666, OPB667, OPB668 (N and T Series)



OPB665 - Flag next to Emitter

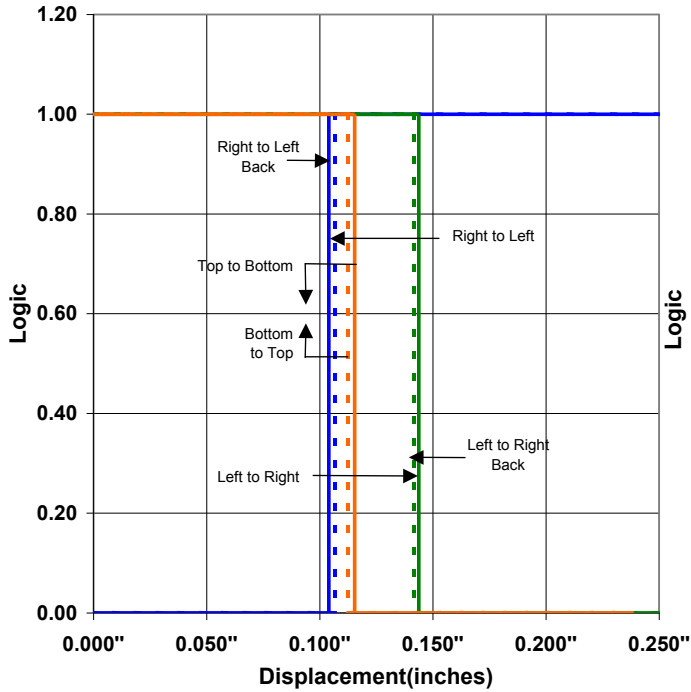

OPB665 - Flag next to Sensor

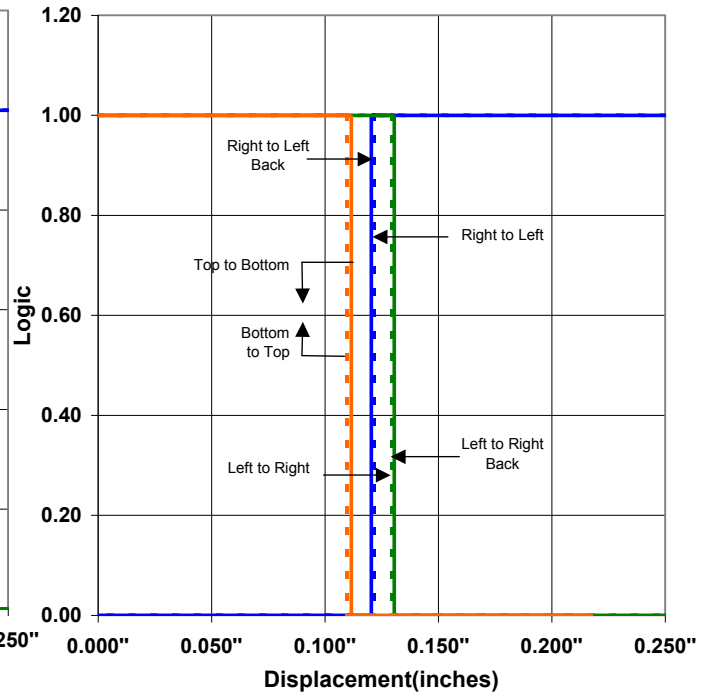

OPB665 - Flag in Middle of Slot

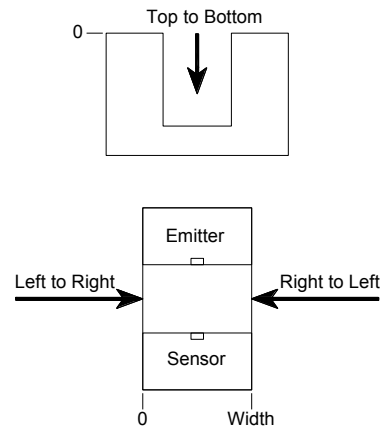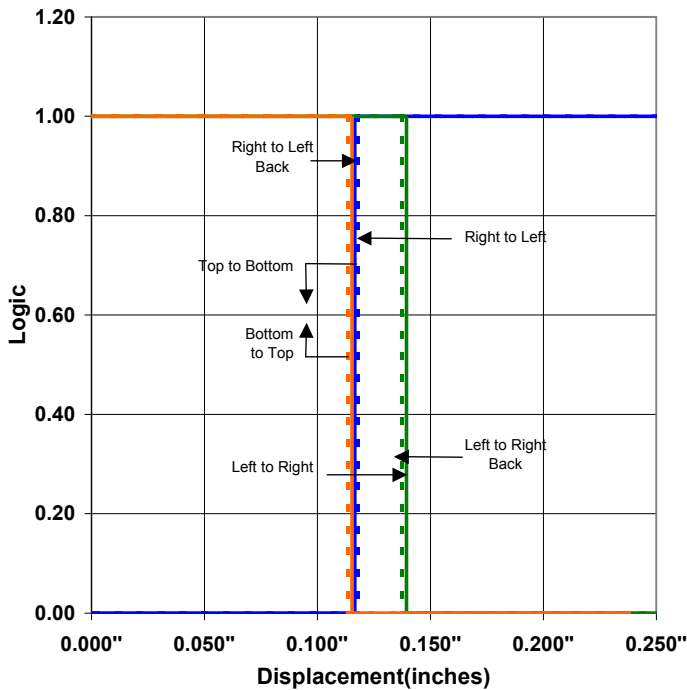

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331