



RoHS compliant


## FEATURES

- Low pick-up voltage for high ambient use
- Sealed construction
- Global standard terminal pitch
- Usable at high temperature: 85°C 185°F

## TYPICAL APPLICATIONS

- Power-window
- Car antenna
- Door lock
- Intermittent wiper
- Interior lighting
- Power seat
- Power sunroof
- Car stereo
- Horn
- Lift gate, etc.

## ORDERING INFORMATION

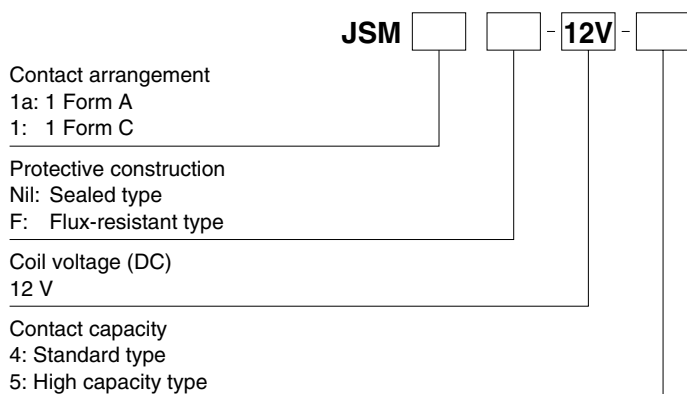

## TYPES

| Contact arrangement | Coil voltage | Standard type |                     | High capacity type |                     |
|---------------------|--------------|---------------|---------------------|--------------------|---------------------|
|                     |              | Sealed type   | Flux-resistant type | Sealed type        | Flux-resistant type |
|                     |              | Part No.      | Part No.            | Part No.           | Part No.            |
| 1 Form A            | 12 V DC      | JSM1a-12V-4   | JSM1aF-12V-4        | JSM1a-12V-5        | JSM1aF-12V-5        |
| 1 Form C            | 12 V DC      | JSM1-12V-4    | JSM1F-12V-4         | JSM1-12V-5         | JSM1F-12V-5         |

Standard packing; Carton: 100 pcs.; Case: 500 pcs.

## RATING

### 1. Coil data

| Nominal coil voltage | Pick-up voltage<br>(at 20°C 68°F)<br>(Initial) | Drop-out voltage<br>(at 20°C 68°F)<br>(Initial) | Nominal operating current<br>[±10%] (at 20°C 68°F) | Coil resistance<br>[±10%] (at 20°C 68°F) | Nominal operating power | Usable voltage range |
|----------------------|------------------------------------------------|-------------------------------------------------|----------------------------------------------------|------------------------------------------|-------------------------|----------------------|
| 12V DC               | Max. 6.3 V DC                                  | Min. 0.9 V DC                                   | 53.3 mA                                            | 225Ω                                     | 640 mW                  | 10 to 16V DC         |

Note: Other pick-up voltage types are also available. Please contact us for details.


2. Specifications

| Characteristics            | Item                                              |                           | Specifications                                                                                                                            |          |                                                                                       |          |
|----------------------------|---------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------------------------------------------------------------------|----------|
|                            |                                                   |                           | Standard type                                                                                                                             |          | High capacity type                                                                    |          |
| Contact                    | Arrangement                                       |                           | 1 Form A                                                                                                                                  | 1 Form C | 1 Form A                                                                              | 1 Form C |
|                            | Contact resistance (Initial)                      |                           | Max. 200 mΩ<br>(Measured after operating 5 times, 6V DC 1A)                                                                               |          | Max. 100 mΩ<br>(By voltage drop 6V DC 1A)                                             |          |
|                            | Contact voltage drop                              |                           | Max. 0.2 V DC (at 10 A 12 VDC)                                                                                                            |          |                                                                                       |          |
|                            | Contact material                                  |                           | Ag alloy (Cadmium free)                                                                                                                   |          |                                                                                       |          |
| Rating                     | Nominal switching capacity (resistive load)       |                           | 10A 16V DC                                                                                                                                |          | 15A 16V DC                                                                            |          |
|                            | Max. carrying current*3                           |                           | 25 A (at 20°C 68°F for 2 minutes), 15 A (at 20°C 68°F for 1 hour),<br>20 A (at 85°C 185°F for 2 minutes), 10 A (at 85°C 185°F for 1 hour) |          |                                                                                       |          |
|                            | Max. switching power (resistive load)             |                           | 160 mW                                                                                                                                    |          | 240 W                                                                                 |          |
|                            | Max. switching voltage                            |                           | 16V DC                                                                                                                                    |          |                                                                                       |          |
|                            | Max. switching current                            |                           | 10 A                                                                                                                                      |          | 15 A (Max. 10 A at 85°C 185°F)                                                        |          |
|                            | Nominal operating power                           |                           | 640 mW                                                                                                                                    |          |                                                                                       |          |
|                            | Min. switching capacity (resistive load)*1        |                           | 1 A 12 V DC                                                                                                                               |          |                                                                                       |          |
| Electrical characteristics | Insulation resistance (Initial)                   |                           | Min. 100 MΩ (at 500V DC)                                                                                                                  |          |                                                                                       |          |
|                            | Breakdown voltage (Initial)                       | Between open contacts     | 750 Vrms for 1 min. (Detection current: 10mA)                                                                                             |          |                                                                                       |          |
|                            |                                                   | Between contacts and coil | 1,500 Vrms for 1 min. (Detection current: 10mA)                                                                                           |          |                                                                                       |          |
|                            | Operate time (at 20°C 68°F)                       |                           | Max. 10ms (at nominal voltage) (excluding contact bounce time)                                                                            |          |                                                                                       |          |
|                            | Release time (at 20°C 68°F)                       |                           | Max. 10ms (at nominal voltage) (excluding contact bounce time, without diode)                                                             |          |                                                                                       |          |
| Mechanical characteristics | Shock resistance                                  | Functional                | Min. 98 m/s <sup>2</sup> {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)                                                 |          |                                                                                       |          |
|                            |                                                   | Destructive               | Min. 980 m/s <sup>2</sup> {100G} (Half-wave pulse of sine wave: 6ms)                                                                      |          |                                                                                       |          |
|                            | Vibration resistance                              | Functional                | 10 Hz to 55 Hz, at double amplitude of 1.6 mm (Detection time: 10μs)                                                                      |          |                                                                                       |          |
|                            |                                                   | Destructive               | 10 Hz to 55 Hz, at double amplitude of 2.0 mm                                                                                             |          |                                                                                       |          |
| Expected life              | Electrical (at nominal switching capacity)        |                           | Min. 10 <sup>5</sup> (at 15 cpm)                                                                                                          |          | N.O.: Min. 10 <sup>5</sup> (at 15 cpm),<br>N.C.: Min. 5 × 10 <sup>4</sup> (at 15 cpm) |          |
|                            | Mechanical                                        |                           | Min. 10 <sup>7</sup> (at 180 cpm)                                                                                                         |          |                                                                                       |          |
| Conditions                 | Conditions for operation, transport and storage*2 |                           | Ambient temperature: -40°C to +85°C -40°F to +185°F,<br>Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature)    |          |                                                                                       |          |
|                            | Max. operating speed                              |                           | 15 cps. (at nominal switching capacity)                                                                                                   |          |                                                                                       |          |


Notes: \*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.  
\*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Please refer to “Usage ambient condition” in CAUTIONS FOR USE OF AUTOMOTIVE RELAYS.  
\*3. Depends on connection conditions. Also, this does not guarantee repeated switching. We recommend that you confirm operation under actual conditions.

REFERENCE DATA


1-(1). Coil temperature rise (10A)  
Measured portion: Inside the coil  
Contact carrying current, 10A  
Ambient temperature: Room temperature, 85°C  
185°F

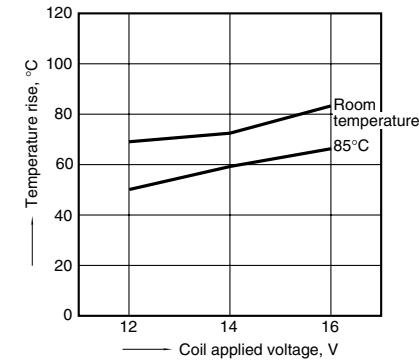


1-(2). Coil temperature rise (15A)  
Measured portion: Inside the coil  
Contact carrying current, 15A  
Ambient temperature: Room temperature, 85°C  
185°F

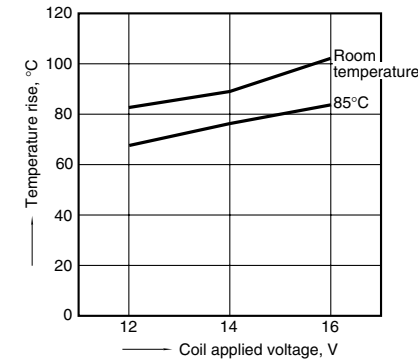

2. Max. switching capability  
(Resistive load, initial)

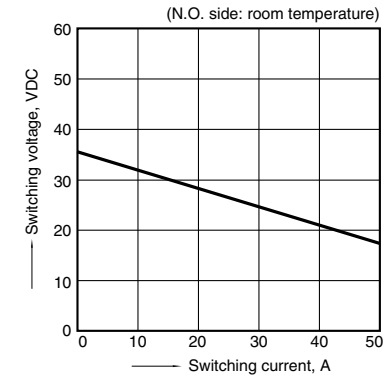


### 3. Ambient temperature and operating voltage range

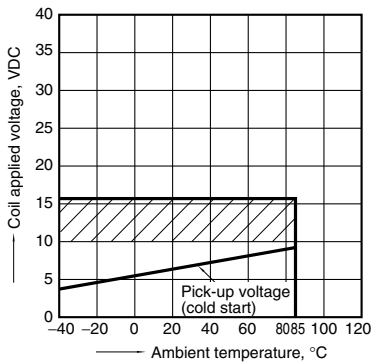


### 4. Distribution of pick-up and drop-out voltage

Sample: JSM1-12V-5, 50pcs.

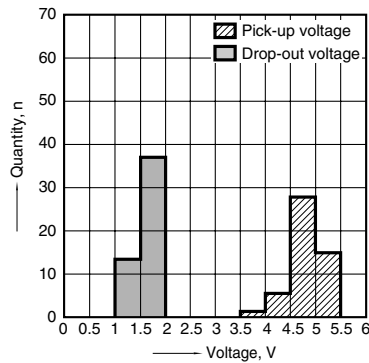

### 5. Distribution of operate and release time



Sample: JSM1-12V-5, 50pcs.  
Coil both side without diode

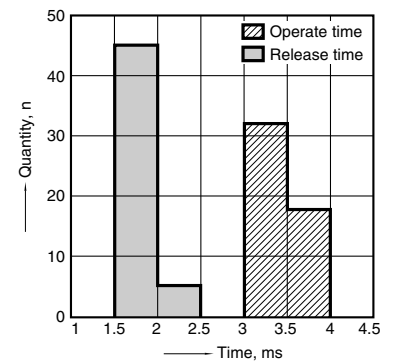

### 6-(1). Electrical life test (Motor load)

Sample: JSM1-12V-5, 3pcs.  
Load: 50A (Inrush), 10A 16V DC (Steady)  
Switching frequency: (ON : OFF = 1s : 9s)



Circuit :

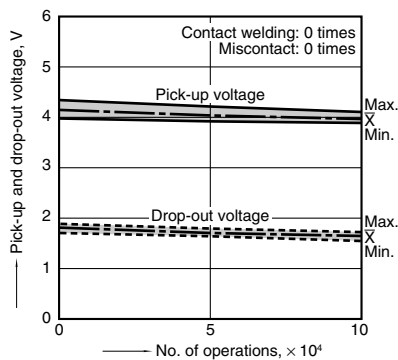

### 6-(2). Electrical life test (Lamp load)

Sample: JSM1a-12V-5, 4pcs.  
Load: 55.2A (Inrush), 9.6A 14.5V DC (Steady)  
Switching frequency: (ON : OFF = 1s : 3s)

Circuit :

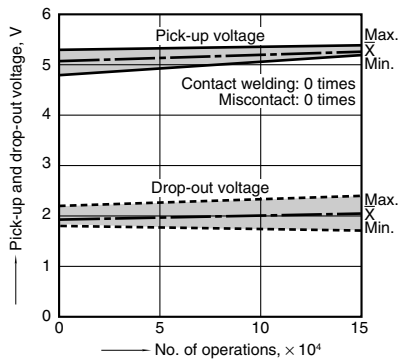


DIMENSIONS (mm inch)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://industrial.panasonic.com/ac/e>

CAD Data




External dimensions

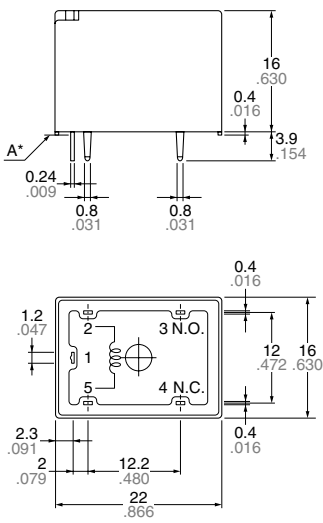


| Dimension:                  | General tolerance  |
|-----------------------------|--------------------|
| Max. 1mm .039 inch:         | $\pm 0.1 \pm .004$ |
| 1 to 3mm .039 to .118 inch: | $\pm 0.2 \pm .008$ |
| Min. 3mm .118 inch:         | $\pm 0.3 \pm .012$ |

\* Dimensions (thickness and width) of terminal specified in this catalog is measured before pre-soldering.  
Intervals between terminals is measured at A surface level.

Schematic (Bottom view)



PC board pattern (Bottom view)

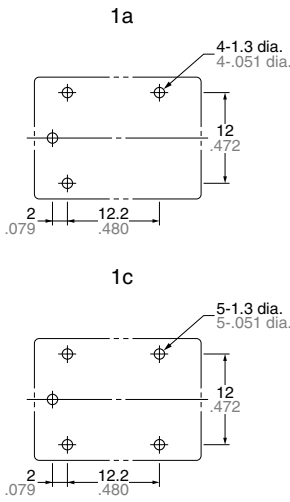

Tolerance:  $\pm 0.1 \pm .004$

For Cautions for Use, see Relay Technical Information.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[JSM1-12V-4](#) [JSM1-12V-5](#) [JSM1a-12V-5](#) [JSM1aF-12V-4](#) [JSM1aF-12V-5](#) [JSM1-9V-4](#) [JSM1-9V-5](#) [JSM1A-9V-4](#)  
[JSM1A-9V-5](#) [JSM1A-12V-4](#) [JSM1F-12V-5](#) [JSM1F-12V-4](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331