

## Automation Transformers - Non-Ventilated 50 VA to 45 kVA

SolaHD encapsulated transformers are rated for hazardous locations as well as harsh industrial environments. Encapsulation and rugged UL Listed/NEMA Type 3R enclosures protect the transformer from dust, moisture, and provides extra shock and vibration resistance. SolaHD transformers fully comply with the latest edition of the National Electrical Code for Class I, Division 2, Group A, B, C and D locations when installed in compliance with NEC 501.100 (B).

### Features

#### Single Phase: .05 – .250 kVA

- UL Listed/NEMA Type 3R non encapsulated enclosure for indoor and outdoor service
- Low temperature rise, UL Class I30 °C insulation system, 80 °C temperature rise under full load
- Conduit knockouts for side entry into wiring compartment
- Copper lead wire terminations

#### Single Phase: 0.500 – 25 kVA

#### Three Phase: 3 – 45 kVA

- Available as standard in Cold Rolled Steel or Painted Stainless Steel
- UL Listed/NEMA Type 3R encapsulated enclosure for indoor and outdoor service
- Electrostatically shielded for quality power on sizes 1 kVA and larger
- UL Class 200°C insulation system, 115°C temperature rise under full load
- Conduit knockouts for side entry into wiring compartment (Type 3R versions only)
- Copper lead wire terminations
- .500 - 45 kVA units are encapsulated with electrical grade silica and epoxy for industrial applications

### Related Products

- Some SolaHD DC power supplies are available with Class I, Division 2 ratings or encapsulation.
- Surge Protective Devices



### Certifications and Compliances

#### All Models

-  Listed: E25872, E77014
  - UL 1561 or UL 5085-1, UL 5085-2
  - CSA C22.2 No. 47 or No. 66
  - RoHS Compliant

#### Group 5, Export Models

-  Low Voltage Directive
  - IEC 61558-1, IEC 61558-2-4

### Accessories and Optional Design Styles

- Other enclosure styles available (contact Technical Support for details):
  - 316 Stainless Steel
- Copper Wound designs
- UL Listed/NEMA Type 4/12 or 4X Encapsulated Enclosures
- Low temperature designs available
- cULus Listed E361435 transformers for Class I, Division 2/Zone 2 hazardous locations are available as custom designs.

Note: Weights and dimensions may change and should not be used for construction purposes.

## Selection Table: Single Phase

### Group 1: 240 x 480 Primary, 120/240 Secondary, 60 Hz

| kVA              | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|------------------|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| Non-Encapsulated |                                           |                                                            |                   |                  |                  |                                    |                              |                           |                 |                   |
| .050             | HS1B50                                    | N/A                                                        | 6.00 (152.4)      | 4.00 (101.6)     | 3.00 (76.2)      | 3.00 (1.36)                        | 2                            | 15                        | .208/.104       | 0.416/0.208       |
| .075             | HS1B75                                    |                                                            | 6.00 (152.4)      | 4.00 (101.6)     | 3.00 (76.2)      | 3.00 (1.36)                        | 2                            | 15                        | .312/.156       | 0.625/0.312       |
| .100             | HS1B100                                   |                                                            | 6.00 (152.4)      | 4.00 (101.6)     | 3.00 (76.2)      | 4.00 (1.81)                        | 2                            | 15                        | .417/.208       | 0.833/0.417       |
| .150             | HS1B150                                   |                                                            | 8.00 (203.2)      | 4.00 (101.6)     | 4.00 (101.6)     | 5.00 (2.27)                        | 2                            | 15                        | .625/.313       | 1.25/.625         |
| .250             | HS1B250                                   |                                                            | 8.00 (203.2)      | 4.00 (101.6)     | 4.00 (101.6)     | 8.00 (3.63)                        | 2                            | 15                        | 1.04/.512       | 2.08/1.04         |
| Encapsulated     |                                           |                                                            |                   |                  |                  |                                    |                              |                           |                 |                   |
| 0.5              | HS1F500B                                  | HSP1F500B                                                  | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 22.0 (9.98)                        | 3                            | 15                        | 2.08/1.04       | 4.16/2.08         |
| 0.75             | HS1F750B                                  | HSP1F750B                                                  | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 27.0 (12.25)                       | 3                            | 15                        | 3.13/1.56       | 6.25/3.13         |
| 1                | HS1F1BS                                   | HSP1F1BS                                                   | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 28.0 (12.70)                       | 3                            | 16                        | 4.17/2.08       | 8.33/4.17         |
| 1.5              | HS1F1.5AS                                 | HSP1F1.5AS                                                 | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 38.0 (17.24)                       | 4                            | 16                        | 6.25/3.13       | 12.5/6.25         |
| 2                | HS1F2AS                                   | HSP1F2AS                                                   | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 45.0 (20.42)                       | 4                            | 16                        | 8.33/4.17       | 16.7/8.33         |
| 3                | HS5F3AS                                   | HSP5F3AS                                                   | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 55.0 (24.95)                       | 4                            | 17                        | 12.5/6.25       | 25.0/12.5         |
| 5                | HS5F5AS                                   | HSP5F5AS                                                   | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 131.0 (59.42)                      | 4                            | 17                        | 20.8/10.4       | 41.6/20.8         |
| 7.5              | HS5F7.5AS                                 | HSP5F7.5AS                                                 | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 155.0 (70.31)                      | 4                            | 18                        | 31.3/15.6       | 62.5/31.3         |
| 10               | HS5F10 AS                                 | HSP5F10 AS                                                 | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 166.0 (75.30)                      | 4                            | 18                        | 41.7/20.8       | 83.3/41.7         |
| 15               | HS5F15AS                                  | HSP5F15AS                                                  | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 549.0 (249.02)                     | 4                            | 18                        | 62.5/31.2       | 125.0/62.5        |
| 25               | HS5F25 AS                                 | HSP5F25 AS                                                 | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 637.0 (288.94)                     | 4                            | 18                        | 104.0/52.0      | 208.0/104.0       |

### Group 2: 600 Volt Primary, 120/240 Secondary, 60 Hz

| kVA              | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|------------------|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| Non-Encapsulated |                                           |                                                            |                   |                  |                  |                                    |                              |                           |                 |                   |
| .100             | HS10B100                                  | N/A                                                        | 6.00 (152.4)      | 4.00 (101.6)     | 3.00 (76.2)      | 4.00 (1.81)                        | 2                            | 21                        | 0.167           | .833/.417         |
| .150             | HS10B150                                  |                                                            | 8.00 (203.2)      | 4.00 (101.6)     | 4.00 (101.6)     | 5.00 (2.27)                        | 2                            | 21                        | 0.25            | 1.25/.625         |
| .250             | HS10B250                                  |                                                            | 8.00 (203.2)      | 4.00 (101.6)     | 4.00 (101.6)     | 8.00 (3.63)                        | 2                            | 21                        | 0.417           | 2.08/1.04         |
| Encapsulated     |                                           |                                                            |                   |                  |                  |                                    |                              |                           |                 |                   |
| .500             | HS10F500B                                 | HSP10F500B                                                 | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 22.0 (9.98)                        | 3                            | 21                        | 0.833           | 4.16/2.08         |
| .750             | HS10F750B                                 | HSP10F750B                                                 | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 23.0 (10.43)                       | 3                            | 21                        | 1.25            | 6.25/3.13         |
| 1                | HS10F1BS                                  | HSP10F1BS                                                  | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 28.0 (12.70)                       | 3                            | 21                        | 1.67            | 8.33/4.17         |
| 1.5              | HS10F1.5AS                                | HSP10F1.5AS                                                | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 38.0 (17.24)                       | 4                            | 21                        | 2.5             | 12.5/6.25         |
| 2                | HS10F2AS                                  | HSP10F2AS                                                  | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 60.0 (27.22)                       | 4                            | 21                        | 3.33            | 16.7/8.33         |
| 3                | HS10F3AS                                  | HSP10F3AS                                                  | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 66.0 (29.94)                       | 4                            | 22                        | 5.0             | 25.0/12.5         |
| 5                | HS10F5AS                                  | HSP10F5AS                                                  | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 100.0 (45.36)                      | 4                            | 22                        | 8.3             | 41.6/20.8         |
| 7.5              | HS10F7.5AS                                | HSP10F7.5AS                                                | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 135.0 (61.23)                      | 4                            | 22                        | 12.5            | 62.5/31.3         |
| 10               | HS10F10 AS                                | HSP10F10 AS                                                | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 150.0 (68.04)                      | 4                            | 22                        | 16.7            | 83.3/41.7         |

Notes:

1. Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
2. Contact Technical Services for other enclosure types.

## Selection Table: Single Phase

### Group 3: 120/208/240/277 Volt Primary, 120/240 Secondary, 60 Hz

| kVA          | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group 2<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps<br>@ 277 V | Secondary<br>Amps |
|--------------|-------------------------------------------|-----------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|----------------------------|-------------------|
| Encapsulated |                                           |                                                           |                   |                  |                  |                                    |                              |                           |                            |                   |
| 1            | HS12F1BS                                  | HSP12F1BS                                                 | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 29.0 (13.15)                       | 3                            | 19                        | 3.6                        | 8.33/4.17         |
| 1.5          | HS12F1.5AS                                | HSP12F1.5AS                                               | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 40.0 (18.14)                       | 4                            | 20                        | 5.4                        | 12.5/6.25         |
| 2            | HS12F2AS                                  | HSP12F2AS                                                 | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 60.0 (27.22)                       | 4                            | 20                        | 7.2                        | 16.7/8.33         |
| 3            | HS12F3AS                                  | HSP12F3AS                                                 | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 66.0 (29.94)                       | 4                            | 20                        | 10.8                       | 25.0/12.5         |
| 5            | HS12F5AS                                  | HSP12F5AS                                                 | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 104.0 (47.17)                      | 4                            | 20                        | 18.0                       | 41.6/20.8         |
| 7.5          | HS12F7.5AS                                | HSP12F7.5AS                                               | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 135.0 (61.23)                      | 4                            | 20                        | 27.1                       | 62.5/31.3         |
| 10           | HS12F10 AS                                | HSP12F10 AS                                               | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 156.0 (70.76)                      | 4                            | 20                        | 36.1                       | 83.3/41.7         |

### Group 4: 190/200/208/220/380/400/415/440 Volt Primary, 110/220 Secondary, 50/60 Hz Copper wound 200/208/230/400/415/460 Volt Primary, 115/230 Secondary, 50/60 Hz Copper wound 208/240/415/480 Volt Primary, 120/240 Secondary, 60 Hz only Copper wound

| kVA                        | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group 2<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps <sup>2</sup> | Secondary<br>Amps |
|----------------------------|-------------------------------------------|-----------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|------------------------------|-------------------|
| Encapsulated, Copper Wound |                                           |                                                           |                   |                  |                  |                                    |                              |                           |                              |                   |
| 1                          | HS14F1BS                                  | HSP14F1BS                                                 | 10.00 (254.0)     | 6.00 (152.4)     | 5.00 (127.0)     | 34.0 (15.42)                       | 3                            | 23                        | 4.5/2.3                      | 9.1/4.5           |
| 1.5                        | HS14F1.5BS                                | HSP14F1.5BS                                               | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 40.0 (18.13)                       | 4                            | 24                        | 6.8/3.4                      | 13.6/6.8          |
| 2                          | HS14F2BS                                  | HSP14F2BS                                                 | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 60.0 (27.21)                       | 4                            | 24                        | 9.1/4.5                      | 18.2/9.1          |
| 3                          | HS14F3BS                                  | HSP14F3BS                                                 | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 73.0 (33.11)                       | 4                            | 24                        | 13.6/6.8                     | 27.3/13.6         |
| 5                          | HS14F5BS                                  | HSP14F5BS                                                 | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 100.0 (45.36)                      | 4                            | 24                        | 22.7/11.4                    | 45.5/22.7         |
| 7.5                        | HS14F7.5BS                                | HSP14F7.5BS                                               | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 140.0 (63.50)                      | 4                            | 24                        | 34.1/17.0                    | 68.2/34.1         |
| 10                         | HS14F10BS                                 | HSP14F10BS                                                | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 175.0 (79.38)                      | 4                            | 24                        | 45.5/22.7                    | 90.9/45.5         |

### Group 5: Export 190/200/208/220/380/400/415/440 Volt Primary, 110/220 Secondary, 50/60 Hz Copper wound Export 200/208/230/400/415/460 Volt Primary, 115/230 Secondary, 50/60 Hz Copper wound Export 208/240/415/480 Volt Primary, 120/240 Secondary, 60 Hz only Copper wound



| kVA                        | Catalog Number<br>Group 1<br>Rolled Steel | Catalog Number<br>Group 2<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps <sup>2</sup> | Secondary<br>Amps |
|----------------------------|-------------------------------------------|-----------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|------------------------------|-------------------|
| Encapsulated, Copper Wound |                                           |                                                           |                   |                  |                  |                                    |                              |                           |                              |                   |
| 1                          | HS14F1CS-CE                               | HSP14F1CS-CE                                              | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 52.0 (23.6)                        | 4                            | 24                        | 4.5/2.3                      | 9.1/4.5           |
| 1.5                        | HS14F1.5CS-CE                             | HSP14F1.5CS-CE                                            | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 55.0 (25.0)                        | 4                            | 24                        | 6.8/3.4                      | 13.6/6.8          |
| 2                          | HS14F2CS-CE                               | HSP14F2CS-CE                                              | 12.00 (304.8)     | 10.00 (254.0)    | 7.00 (177.8)     | 62.0 (28.1)                        | 4                            | 24                        | 9.1/4.5                      | 18.2/9.1          |
| 3                          | HS14F3CS-CE                               | HSP14F3CS-CE                                              | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 142.0 (64.4)                       | 4                            | 24                        | 13.6/6.8                     | 27.3/13.6         |
| 5                          | HS14F5CS-CE                               | HSP14F5CS-CE                                              | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 146.0 (66.2)                       | 4                            | 24                        | 22.7/11.4                    | 45.5/22.7         |
| 7.5                        | HS14F7.5CS-CE                             | HSP14F7.5CS-CE                                            | 17.00 (431.8)     | 14.00 (355.6)    | 9.00 (228.6)     | 175.0 (79.4)                       | 4                            | 24                        | 34.1/17.0                    | 68.2/34.1         |

#### Notes:

1. Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
2. Amperage calculated at 220/440 Volts on primary. UL Listed. 240 and 480 V not available at 50 Hz.
3. Contact Technical Services for other enclosure types.

## Selection Tables: Three Phase

### Group A: 480 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT1F3AS                                   | HTP1F3AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 105.0 (47.63)                      | 4                            | 27                        | 3.6             | 8.3               |
| 6   | HT1F6AS                                   | HTP1F6AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 27                        | 7.2             | 16.6              |
| 9   | HT1F9AS                                   | HTP1F9AS                                                   | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 250.0 (113.40)                     | 4                            | 27                        | 10.8            | 25.0              |
| 15  | HT1F15AS                                  | HTP1F15AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 261.0 (118.39)                     | 4                            | 27                        | 18.1            | 41.7              |
| 30  | HT1F30 AS                                 | HTP1F30 AS                                                 | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 696.0 (315.70)                     | 4                            | 27                        | 36.1            | 83.4              |
| 45  | HT1F45AS                                  | HTP1F45AS                                                  | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 844.0 (382.83)                     | 4                            | 27                        | 54.2            | 125.0             |

### Group B: 208 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT3F3AS                                   | HTP3F3AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 97.0 (44.00)                       | 4                            | 26                        | 7.2             | 8.3               |
| 6   | HT3F6AS                                   | HTP3F6AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 26                        | 14.4            | 16.6              |
| 9   | HT3F9AS                                   | HTP3F9AS                                                   | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 256.0 (116.12)                     | 4                            | 26                        | 21.7            | 25.0              |

### Group C: 480 Volt $\Delta$ Primary, 240 Volt $\Delta$ Secondary with 120 V reduced capacity center tap, 60 Hz <sup>2</sup>

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT5F3AS                                   | HTP5F3AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 105.0 (47.63)                      | 4                            | 28                        | 3.6             | 7.2               |
| 6   | HT5F6AS                                   | HTP5F6AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 28                        | 7.2             | 14.4              |
| 9   | HT5F9AS                                   | HTP5F9AS                                                   | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 250.0 (113.40)                     | 4                            | 28                        | 10.8            | 21.7              |
| 15  | HT5F15AS                                  | HTP5F15AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 305.0 (138.35)                     | 4                            | 28                        | 18.1            | 36.1              |
| 30  | HT5F30 AS                                 | HTP5F30 AS                                                 | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 698.0 (316.61)                     | 4                            | 28                        | 36.1            | 72.2              |
| 45  | HT5F45AS                                  | HTP5F45AS                                                  | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 876.0 (397.35)                     | 4                            | 28                        | 54.2            | 108.3             |

### Group D: 240 Volt $\Delta$ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>3</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT6F3AS                                   | HTP6F3AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 97.0 (44.00)                       | 4                            | 25                        | 7.2             | 8.3               |
| 6   | HT6F6AS                                   | HTP6F6AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 25                        | 14.4            | 16.6              |
| 9   | HT6F9AS                                   | HTP6F9AS                                                   | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 256.0 (116.12)                     | 4                            | 25                        | 21.7            | 25.0              |

#### Notes:

1. Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
2. Refer to *Capacity of Center Tap in Center Tap Delta Transformers* at the beginning of this section.
3. Contact Technical Services for other enclosure types.

## Selection Tables: Three Phase

### Group E: 480 Volt Δ Primary, 380Y/220 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT79F3AS                                  | HTP79F3AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 121.0 (54.88)                      | 4                            | 29                        | 3.6             | 4.6               |
| 6   | HT79F6AS                                  | HTP79F6AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 29                        | 7.2             | 9.1               |
| 9   | HT79F9AS                                  | HTP79F9AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 255.0 (115.7)                      | 4                            | 29                        | 10.8            | 13.6              |

### Group F: 600 Volt Δ Primary, 208Y/120 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT7F3AS                                   | HTP7F3AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 116.0 (52.62)                      | 4                            | 30                        | 2.9             | 8.3               |
| 6   | HT7F6AS                                   | HTP7F6AS                                                   | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 30                        | 5.8             | 16.6              |
| 9   | HT7F9AS                                   | HTP7F9AS                                                   | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 225.0 (115.67)                     | 4                            | 30                        | 8.7             | 25.0              |

### Group G: 208 Volt Δ Primary, 480Y/277 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT84F3AS                                  | HTP84F3AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 97.0 (44.00)                       | 4                            | 31                        | 8.3             | 3.6               |
| 6   | HT84F6AS                                  | HTP84F6AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 31                        | 16.6            | 7.2               |
| 9   | HT84F9AS                                  | HTP84F9AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 256.0 (116.12)                     | 4                            | 31                        | 25.0            | 10.8              |

### Group H: 240 Volt Δ Primary, 480Y/277 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT85F3AS                                  | HTP85F3AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 97.0 (44.00)                       | 4                            | 32                        | 7.2             | 3.6               |
| 6   | HT85F6AS                                  | HTP85F6AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 32                        | 14.4            | 7.2               |
| 9   | HT85F9AS                                  | HTP85F9AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 256.0 (116.12)                     | 4                            | 32                        | 21.6            | 10.8              |


### Group J: 480 Volt Δ Primary, 480Y/277 Secondary, 60 Hz

| kVA | Catalog Number<br>Group I<br>Rolled Steel | Catalog Number<br>Group II<br>Stainless Steel <sup>2</sup> | Height<br>in (mm) | Width<br>in (mm) | Depth<br>in (mm) | Approx. Ship<br>Weight<br>lbs (kg) | Design<br>Style <sup>1</sup> | Elec<br>Conn <sup>1</sup> | Primary<br>Amps | Secondary<br>Amps |
|-----|-------------------------------------------|------------------------------------------------------------|-------------------|------------------|------------------|------------------------------------|------------------------------|---------------------------|-----------------|-------------------|
| 3   | HT81F3AS                                  | HTP81F3AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 121.0 (54.88)                      | 4                            | 29                        | 3.6             | 3.6               |
| 6   | HT81F6AS                                  | HTP81F6AS                                                  | 13.00 (330.2)     | 16.00 (406.4)    | 9.00 (228.6)     | 150.0 (68.03)                      | 4                            | 29                        | 7.2             | 7.2               |
| 9   | HT81F9AS                                  | HTP81F9AS                                                  | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 255.0 (115.7)                      | 4                            | 29                        | 10.8            | 10.8              |
| 15  | HT81F15AS                                 | HTP81F15AS                                                 | 17.00 (431.8)     | 20.00 (508.0)    | 11.00 (279.4)    | 261.0 (118.39)                     | 4                            | 29                        | 18.1            | 18.1              |
| 30  | HT81F30 AS                                | HTP81F30 AS                                                | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 696.0 (315.70)                     | 4                            | 29                        | 36.1            | 36.1              |
| 45  | HT81F45AS                                 | HTP81F45AS                                                 | 30.00 (762.0)     | 29.00 (736.6)    | 12.00 (304.8)    | 844.0 (382.83)                     | 4                            | 29                        | 54.2            | 54.2              |


#### Notes:

1. Design Styles and Electrical Connections can be found at the end of the Non-Ventilated Distribution Transformers section.
2. Contact Technical Services for other enclosure types.


Design Styles

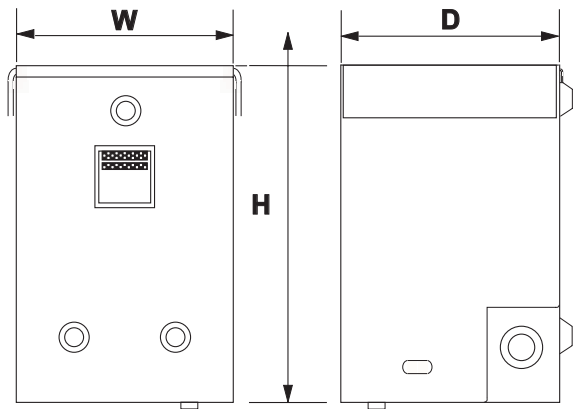

Style 2 - Non-Encapsulated

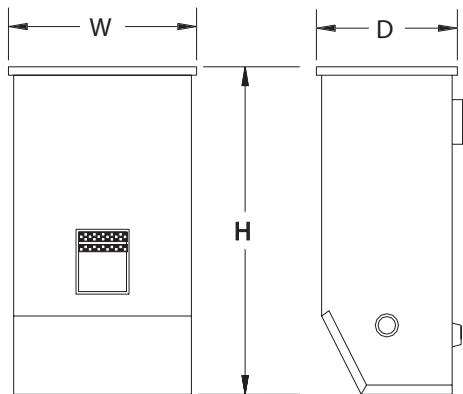


Style 3 - Encapsulated

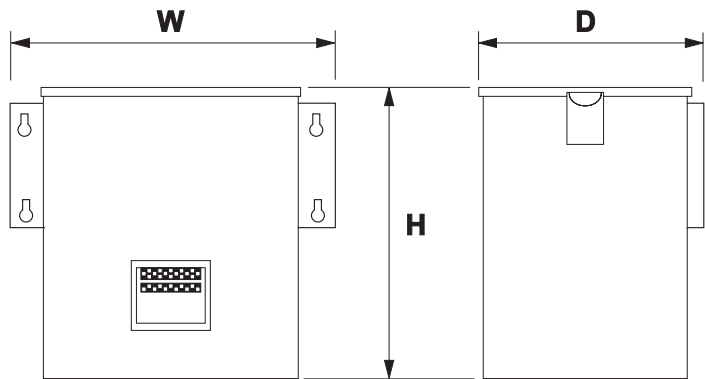

Style 4 - Encapsulated

Customized Enclosures - Contact Technical Services

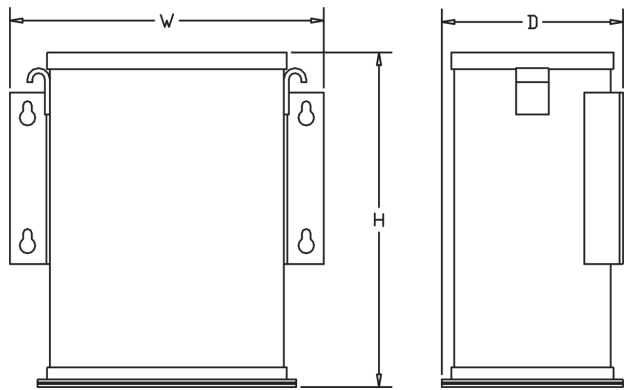

Style 5 - Encapsulated

Available for all encapsulated kVA sizes (For Type 4, 12 and 4X)

## Electrical Connections (Single Phase)

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: None

**15**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 480               | H2 to H3                  | H1 & H4          |
| 240               | H1 to H3<br>H2 to H4      | H1 & H4          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS1 Series**

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: None

**16**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 480               | H2 to H3                  | H1 & H4          |
| 240               | H1 to H3<br>H2 to H4      | H1 & H4          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS1 Series**

240 X 480 Volt Primary  
120/240 Volt Secondary  
Taps: 2, 2½% FCAN & FCBN

**17**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 504               | H4 to H5                  | H1 & H8          |
| 492               | H3 to H5                  | H1 & H8          |
| 480               | H3 to H6                  | H1 & H8          |
| 468               | H2 to H6                  | H1 & H8          |
| 456               | H2 to H7                  | H1 & H8          |
| 252               | H1 to H5<br>H4 to H8      | H1 & H8          |
| 240               | H1 to H6<br>H3 to H8      | H1 & H8          |
| 228               | H1 to H7<br>H2 to H8      | H1 & H8          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS5 Series**

240 X 480 Volt Primary,  
120/240 Volt Secondary  
Taps: 2, 2½% FCAN; 4, 2½% FCBN

**18**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 504               | H5 to H6                  | H1 & H10         |
| 492               | H4 to H6                  | H1 & H10         |
| 480               | H4 to H7                  | H1 & H10         |
| 468               | H3 to H7                  | H1 & H10         |
| 456               | H3 to H8                  | H1 & H10         |
| 444               | H2 to H8                  | H1 & H10         |
| 432               | H2 to H9                  | H1 & H10         |
| 252               | H1 to H6<br>H5 to H10     | H1 & H10         |
| 240               | H1 to H7<br>H4 to H10     | H1 & H10         |
| 228               | H1 to H8<br>H3 to H10     | H1 & H10         |
| 216               | H1 to H9<br>H2 to H10     | H1 & H10         |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS5 Series**

120/208/240/277 Volt Primary  
120/240 Volt Secondary  
Taps: None

**19**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 277               | H2 to H3                  | H1 & H6          |
| 240               | H2 to H3                  | H1 & H5          |
| 208               | H2 to H3                  | H1 & H4          |
| 120               | H1 to H3<br>H2 to H5      | H1 & H5          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS12 Series (1 kVA only)**

$\perp$  = Earth Ground

Note:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.

120/208/240/277 Volt Primary  
120/240 Volt Secondary  
Taps: None

**20**

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 277               | H4 to H5                  | H1 & H8          |
| 240               | H3 to H6                  | H1 & H8          |
| 208               | H2 to H7                  | H1 & H8          |
| 120               | H1 to H6<br>H3 to H8      | H1 & H8          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

**HS12 Series**



Electrical Connections (Single Phase)

600 Volt Primary,  
120/240 Volt Secondary  
Taps: None

21

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 600               |                           | H1 & H2          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

HS10 Series

Note: 1 through 2 kVA units have electrostatic shielding.

600 Volt Primary  
120/240 Volt Secondary  
Taps: 2, 5% FCBN

22

| Primary Voltage   | Interconnect              | Connect Lines to |
|-------------------|---------------------------|------------------|
| 600               | H3 to H4                  | H1 & H6          |
| 570               | H2 to H4                  | H1 & H6          |
| 540               | H2 to H5                  | H1 & H6          |
| Secondary Voltage | Interconnect              | Connect Lines to |
| 240               | X2 to X3                  | X1 & X4          |
| 120-0-120         | X2 to X3<br>X2 to $\perp$ | X1-X2-X4         |
| 120               | X1 to X3<br>X2 to X4      | X1 & X4          |

HS10 Series

190/200/208/220/380/400/415/440 Volt Pri.  
110/220 Volt Secondary  
Taps: None

23

| Primary Voltage             | Interconnect              | Connect Lines to |
|-----------------------------|---------------------------|------------------|
| 440/460/480                 | H5 to H6                  | H1 & H10         |
| 415                         | H4 to H6                  | H1 & H9          |
| 400/415                     | H3 to H6                  | H1 & H8          |
| 380/400                     | H2 to H6                  | H1 & H7          |
| 220/230/240                 | H1 to H6<br>H5 to H10     | H1 & H10         |
| 208                         | H1 to H6<br>H4 to H9      | H1 & H9          |
| 200/208                     | H1 to H6<br>H3 to H8      | H1 & H8          |
| 190/200/208                 | H1 to H6<br>H2 to H7      | H1 & H7          |
| Secondary Voltage           | Interconnect              | Connect Lines to |
| 220/230/240                 | X2 to X3                  | X1 & X4          |
| 110,220/115,<br>230/120,240 | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 110/115/120                 | X1 to X3<br>X2 to X4      | X1 & X4          |

HS14F1BS

190/200/208/220/380/400/415/440 Volt Pri.  
110/220 Volt Secondary  
Taps: None

24

| Primary Voltage             | Interconnect              | Connect Lines to |
|-----------------------------|---------------------------|------------------|
| 440/460/480                 | H5 to H6                  | H1 & H10         |
| 415                         | H4 to H7                  | H1 & H10         |
| 400/415                     | H3 to H8                  | H1 & H10         |
| 380/400                     | H2 to H9                  | H1 & H10         |
| 220/230/240                 | H1 to H6,<br>H5 to H10    | H1 & H10         |
| 208                         | H1 to H7,<br>H4 to H10    | H1 & H10         |
| 200/208                     | H1 to H8,<br>H3 to H10    | H1 & H10         |
| 190/200/208                 | H1 to H9<br>H2 to H10     | H1 & H10         |
| Secondary Voltage           | Interconnect              | Connect Lines to |
| 220/230/240                 | X2 to X3                  | X1 & X4          |
| 110,220/115,<br>230/120,240 | X2 to X3<br>X2 to $\perp$ | X1, X2 & X4      |
| 110/115/120                 | X1 to X3<br>X2 to X4      | X1 & X4          |

HS14 Series

$\perp$  = Earth Ground

Note:  
Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.



## Electrical Connections (Three Phase)

**25**

240 Δ Volt Primary  
208Y/120 Volt Secondary  
Taps: 2, 5% FCBN

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 240               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 228               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 216               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage |                    | Connect Lines To |
| 208               |                    | X1, X2, & X3     |
| 120               |                    | X0, X1, X2, X3   |

**HT6 Series**

**26**

208 Δ Volt Primary  
208Y/120 Volt Secondary  
Taps: 2, 5% FCBN

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 208               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 198               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 187               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage |                    | Connect Lines To |
| 208               |                    | X1, X2, & X3     |
| 120               |                    | X0, X1, X2, X3   |

**HT3 Series**

**27**

480 Δ Volt Primary  
208Y/120 Volt Secondary  
Taps: 2, 5% FCBN

| Primary Voltage   | Interconnect       | Connect Lines to |
|-------------------|--------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 456               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 432               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage |                    | Connect Lines to |
| 208               |                    | X1, X2, & X3     |
| 120               |                    | X0, X1, X2, X3   |

**HT1 Series**

**28**

480 Δ Volt Primary  
240 Δ w/120 CT Volt Secondary  
Taps: 2, 5% FCBN

| Primary Voltage   | Connect Taps       | Connect Lines To |
|-------------------|--------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3       |
| 456               | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3       |
| 432               | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3       |
| Secondary Voltage | Interconnect       | Connect Lines To |
| 240               |                    | X1, X2, X3       |
| 120-0-120         | X6 to              | X1-X6-X3         |

**HT5 Series**

**29**

480 Δ Volt Primary  
380Y/220 Volt Secondary  
Taps: 2, 5% FCBN

| Primary Voltage   | Interconnect       | Connect Lines to |
|-------------------|--------------------|------------------|
| 480               | 1-H1 & 2-H2 & 3-H3 | H1, H2 & H3      |
| 456               | 4-H1 & 5-H2 & 6-H3 | H1, H2 & H3      |
| 432               | 7-H1 & 8-H2 & 9-H3 | H1, H2 & H3      |
| Secondary Voltage | Interconnect       | Connect Lines to |
| 380               |                    | X1, X2, X3       |
| 220               |                    | X0, X1, X2, X3   |

**HT9 Series**

= Earth Ground

### Notes:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.

Electrical Connections (Three Phase)

600 Δ Volt Primary  
208Y/120 Volt Secondary  
Taps: 2, 5% FCBN

30

| Primary Voltage | Connect Taps       | Line Leads |
|-----------------|--------------------|------------|
| 600             | 1-H1 & 2-H2 & 3-H3 | H1, H2, H3 |
| 570             | 4-H1 & 5-H2 & 6-H3 | H1, H2, H3 |
| 540             | 7-H1 & 8-H2 & 9-H3 | H1, H2, H3 |

| Secondary Voltage |  | Line Leads     |
|-------------------|--|----------------|
| 208               |  | X1, X2, X3     |
| 120               |  | X0, X1, X2, X3 |

HT7 Series

208 Δ Volt Primary  
480Y/277 Volt Secondary  
Taps: 2, 5% FCBN

31

| Primary Voltage | Connect Taps       | Line Leads |
|-----------------|--------------------|------------|
| 208             | 1-X1 & 2-X2 & 3-X3 | X1, X2, X3 |
| 198             | 4-X1 & 5-X2 & 6-X3 | X1, X2, X3 |
| 187             | 7-X1 & 8-X2 & 9-X3 | X1, X2, X3 |

| Secondary Voltage |  | Line Leads     |
|-------------------|--|----------------|
| 480               |  | H1, H2, H3     |
| 277               |  | H0, H1, H2, H3 |

HT84 Series

240 Δ Volt Primary  
480Y/277 Volt Secondary  
Taps: 2, 5% FCBN

32

| Primary Voltage | Connect Taps       | Line Leads |
|-----------------|--------------------|------------|
| 240             | 1-X1 & 2-X2 & 3-X3 | X1, X2, X3 |
| 228             | 4-X1 & 5-X2 & 6-X3 | X1, X2, X3 |
| 216             | 7-X1 & 8-X2 & 9-X3 | X1, X2, X3 |

| Secondary Voltage |  | Line Leads     |
|-------------------|--|----------------|
| 480               |  | H1, H2, H3     |
| 277               |  | H0, H1, H2, H3 |

HT85 Series

480 Δ Volt Primary  
480Y/277 Volt Secondary  
Taps: 2, 5% FCBN

33

| Primary Voltage | Interconnect       | Connect Lines to |
|-----------------|--------------------|------------------|
| 480             | 1-H1 & 2-H2 & 3-H3 | H1, H2 & H3      |
| 456             | 4-H1 & 5-H2 & 6-H3 | H1, H2 & H3      |
| 432             | 7-H1 & 8-H2 & 9-H3 | H1, H2 & H3      |

| Secondary Voltage | Interconnect | Connect Lines to |
|-------------------|--------------|------------------|
| 480               |              | X1, X2, X3       |
| 277               |              | X0, X1, X2, X3   |

HT81 Series

Notes:

Connect the electrostatic shield to the equipment ground (green) or to both the equipment ground and the system ground (white). Specifications are subject to change without notice.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331