

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### **RoHS** ML Varistor Series

The ML Series family of Transient Voltage Surge Suppression devices is based on the Littelfuse Multilayer fabrication technology. These components are designed to suppress a variety of transient events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance (EMC). The ML Series is typically applied to protect integrated circuits and other components at the circuit board level.

The wide operating voltage and energy range make the ML Series suitable for numerous applications on power supply, control and signal lines.

The ML Series is manufactured from semiconducting ceramics, and is supplied in a leadless, surface mount package. The ML Series is compatible with modern reflow and wave soldering procedures.

It can operate over a wider temperature range than zener diodes, and has a much smaller footprint than plastic-housed components.

Littelfuse Inc. manufactures other Multilayer Series products. See the MLE Series data sheet for ESD applications, MHS Series data sheet for high-speed ESD applications, the MLN for multiline protection and the AUML Series for automotive applications.



### Features

- RoHS Compliant
- Leadless 0402, 0603, 0805, 1206 and 1210 Chip Sizes
- Multilayer Ceramic Construction Technology
- -55°C to +125°C Operating Temperature Range
- Operating Voltage Range  $V_{M(DC)} = 5.5V$  to 120V
- Rated for Surge Current ( $8 \times 20\mu s$ )
- Rated for Energy ( $10 \times 1000\mu s$ )
- Inherent Bi-directional Clamping
- No Plastic or Epoxy Packaging Assures Better than 94V-0 Flammability Rating
- Standard Low Capacitance Types Available

### Applications

- Suppression of Inductive Switching or Other Transient Events Such as EFT and Surge Voltage at the Circuit Board Level
- ESD Protection for Components Sensitive to IEC 61000-4-2, MIL-STD-883C Method 3015.7, and Other Industry Specifications (See Also the MLE or MLN Series)
- Provides On-Board Transient Voltage Protection for ICs and Transistors
- Used to Help Achieve Electromagnetic Compliance of End Products
- Replace Larger Surface Mount TVS Zeners in Many Applications

### Size

| Metric | EIA  |
|--------|------|
| 1005   | 0402 |
| 1608   | 0603 |
| 2012   | 0805 |
| 3216   | 1206 |
| 3225   | 1210 |
| 4532   | 1812 |
| 5650   | 2220 |

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### **RoHS** ML Varistor Series

**Absolute Maximum Ratings** For ratings of individual members of a series, see Device Ratings and Specifications table.

Continuous:

Steady State Applied Voltage:

DC Voltage Range ( $V_{M(DC)}$ ) ..... 3.5 to 120 V

AC Voltage Range ( $V_{M(AC)(RMS)}$ ) ..... 2.5 to 107 V

Transient:

Non-Repetitive Surge Current, 8/20 $\mu$ s Waveform, ( $I_{TM}$ ) ..... 4 to 500 A

Non-Repetitive Surge Energy, 10/1000 $\mu$ s Waveform, ( $W_{TM}$ ) ..... 0.02 to 1.2 J

Operating Ambient Temperature Range ( $T_A$ ) ..... -55 to + 125 °C

Storage Temperature Range ( $T_{STG}$ ) ..... -55 to + 150 °C

Temperature Coefficient ( $\Delta V$ ) of Clamping Voltage ( $V_C$ ) at Specified Test Current ..... <0.01 %/°C

### Device Ratings and Specifications

| PART<br>NUMBER | MAXIMUM RATINGS (125°C)                     |             |                                                                     |                                                                       |                                                                            | SPECIFICATIONS (25°C)                        |                    |                                       |
|----------------|---------------------------------------------|-------------|---------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------|--------------------|---------------------------------------|
|                | MAXIMUM<br>CONTINUOUS<br>WORKING<br>VOLTAGE |             | MAXIMUM<br>NON-<br>REPETITIVE<br>SURGE<br>CURRENT<br>(8/20 $\mu$ s) | MAXIMUM<br>NON-<br>REPETITIVE<br>SURGE<br>ENERGY<br>(10/1000 $\mu$ s) | MAXIMUM<br>CLAMPING<br>VOLTAGE AT<br>1A<br>(OR AS NOTED)<br>(8/20 $\mu$ s) | NOMINAL VOLTAGE<br>AT 1mA DC TEST<br>CURRENT |                    | TYPICAL<br>CAPACITANCE<br>AT f = 1MHz |
|                | $V_{M(DC)}$                                 | $V_{M(AC)}$ | $I_{TM}$                                                            | $W_{TM}$                                                              | $V_C$                                                                      | $V_{N(DC)}$<br>MIN                           | $V_{N(DC)}$<br>MAX | C                                     |
|                | (V)                                         | (V)         | (A)                                                                 | (J)                                                                   | (V)                                                                        | (V)                                          | (V)                | (pF)                                  |
| V3.5MLA0603    | 3.5                                         | 2.5         | 30                                                                  | 0.1                                                                   | 13                                                                         | 3.7                                          | 7.0                | 1270                                  |
| V3.5MLA0805    | 3.5                                         | 2.5         | 120                                                                 | 0.3                                                                   | 13                                                                         | 3.7                                          | 7.0                | 2530                                  |
| V3.5MLA0805L   | 3.5                                         | 2.5         | 40                                                                  | 0.1                                                                   | 13                                                                         | 3.7                                          | 7.0                | 1380                                  |
| V3.5MLA1206    | 3.5                                         | 2.5         | 100                                                                 | 0.3                                                                   | 13                                                                         | 3.7                                          | 7.0                | 6000                                  |
| V5.5MLA0402    | 5.5                                         | 4.0         | 20                                                                  | 0.050                                                                 | 19                                                                         | 7.1                                          | 10.8               | 220                                   |
| V5.5MLA0402L   | 5.5                                         | 4.0         | 20                                                                  | 0.050                                                                 | 38                                                                         | 15.9                                         | 21.5               | 70                                    |
| V5.5MLA0603    | 5.5                                         | 4.0         | 30                                                                  | 0.1                                                                   | 17.5                                                                       | 7.1                                          | 9.3                | 760                                   |
| V5.5MLA0805    | 5.5                                         | 4.0         | 120                                                                 | 0.3                                                                   | 17.5                                                                       | 7.1                                          | 9.3                | 1840                                  |
| V5.5MLA0805L   | 5.5                                         | 4.0         | 40                                                                  | 0.1                                                                   | 17.5                                                                       | 7.1                                          | 9.3                | 990                                   |
| V5.5MLA1206    | 5.5                                         | 4.0         | 150                                                                 | 0.4                                                                   | 17.5                                                                       | 7.1                                          | 9.3                | 5180                                  |
| V9MLA0402      | 9                                           | 6.5         | 20                                                                  | 0.050                                                                 | 30                                                                         | 11                                           | 16                 | 120                                   |
| V9MLA0402L     | 9                                           | 6.5         | 4                                                                   | 0.020                                                                 | 35                                                                         | 11                                           | 16                 | 33                                    |
| V9MLA0603      | 9.0                                         | 6.5         | 30                                                                  | 0.1                                                                   | 25.5                                                                       | 11                                           | 16                 | 490                                   |
| V9MLA0805L     | 9.0                                         | 6.5         | 40                                                                  | 0.1                                                                   | 25.5                                                                       | 11                                           | 16                 | 520                                   |
| V12MLA0805L    | 12                                          | 9.0         | 40                                                                  | 0.1                                                                   | 29                                                                         | 14                                           | 18.5               | 410                                   |
| V14MLA0402     | 14                                          | 10          | 20                                                                  | 0.050                                                                 | 38                                                                         | 15.9                                         | 21.5               | 70                                    |
| V14MLA0603     | 14                                          | 10          | 30                                                                  | 0.1                                                                   | 34.5                                                                       | 15.9                                         | 21.5               | 180                                   |
| V14MLA0805     | 14                                          | 10          | 120                                                                 | 0.3                                                                   | 32                                                                         | 15.9                                         | 20.3               | 560                                   |
| V14MLA0805L    | 14                                          | 10          | 40                                                                  | 0.1                                                                   | 32                                                                         | 15.9                                         | 20.3               | 320                                   |
| V14MLA1206     | 14                                          | 10          | 150                                                                 | 0.4                                                                   | 32                                                                         | 15.9                                         | 20.3               | 1840                                  |

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### RoHS ML Varistor Series

#### Device Ratings and Specifications (Continued)

| PART<br>NUMBER | MAXIMUM RATINGS (125°C)                     |                    |                                                               |                                                                 |                                                                      | SPECIFICATIONS (25°C)                        |                           |                                       |
|----------------|---------------------------------------------|--------------------|---------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|----------------------------------------------|---------------------------|---------------------------------------|
|                | MAXIMUM<br>CONTINUOUS<br>WORKING<br>VOLTAGE |                    | MAXIMUM<br>NON-<br>REPETITIVE<br>SURGE<br>CURRENT<br>(8/20μs) | MAXIMUM<br>NON-<br>REPETITIVE<br>SURGE<br>ENERGY<br>(10/1000μs) | MAXIMUM<br>CLAMPING<br>VOLTAGE AT<br>1A<br>(OR AS NOTED)<br>(8/20μs) | NOMINAL VOLTAGE<br>AT 1mA DC TEST<br>CURRENT |                           | TYPICAL<br>CAPACITANCE<br>AT f = 1MHz |
|                | V <sub>M(DC)</sub>                          | V <sub>M(AC)</sub> | I <sub>TM</sub>                                               | W <sub>TM</sub>                                                 | V <sub>C</sub>                                                       | V <sub>N(DC)</sub><br>MIN                    | V <sub>N(DC)</sub><br>MAX | C                                     |
|                | (V)                                         | (V)                | (A)                                                           | (J)                                                             | (V)                                                                  | (V)                                          | (V)                       | (pF)                                  |
| V18MLA0402     | 18                                          | 14                 | 20                                                            | 0.050                                                           | 50                                                                   | 22                                           | 28.0                      | 40                                    |
| V18MLA0603     | 18                                          | 14                 | 30                                                            | 0.1                                                             | 50                                                                   | 22                                           | 28.0                      | 120                                   |
| V18MLA0805     | 18                                          | 14                 | 120                                                           | 0.3                                                             | 44                                                                   | 22                                           | 28.0                      | 520                                   |
| V18MLA0805L    | 18                                          | 14                 | 40                                                            | 0.1                                                             | 44                                                                   | 22                                           | 28.0                      | 290                                   |
| V18MLA1206     | 18                                          | 14                 | 150                                                           | 0.4                                                             | 44                                                                   | 22                                           | 28.0                      | 1270                                  |
| V18MLA1210     | 18                                          | 14                 | 500                                                           | 2.5                                                             | 44 at 2.5A                                                           | 22                                           | 28.0                      | 1440                                  |
| V26MLA0603     | 26                                          | 20                 | 30                                                            | 0.1                                                             | 60                                                                   | 31                                           | 38                        | 110                                   |
| V26MLA0805     | 26                                          | 20                 | 100                                                           | 0.3                                                             | 60                                                                   | 29.5                                         | 38.5                      | 220                                   |
| V26MLA0805L    | 26                                          | 20                 | 40                                                            | 0.1                                                             | 60                                                                   | 29.5                                         | 38.5                      | 140                                   |
| V26MLA1206     | 26                                          | 20                 | 150                                                           | 0.6                                                             | 60                                                                   | 29.5                                         | 38.5                      | 1040                                  |
| V26MLA1210     | 26                                          | 20                 | 300                                                           | 1.2                                                             | 60 at 2.5A                                                           | 29.5                                         | 38.5                      | 1040                                  |
| V30MLA0603     | 30                                          | 25                 | 30                                                            | 0.1                                                             | 74                                                                   | 37                                           | 46                        | 90                                    |
| V30MLA0805L    | 30                                          | 25                 | 30                                                            | 0.1                                                             | 72                                                                   | 37                                           | 46                        | 90                                    |
| V30MLA1210     | 30                                          | 25                 | 280                                                           | 1.2                                                             | 68 at 2.5A                                                           | 35                                           | 43                        | 1820                                  |
| V30MLA1210L    | 30                                          | 25                 | 220                                                           | 0.9                                                             | 68 at 2.5A                                                           | 35                                           | 43                        | 1760                                  |
| V33MLA1206     | 33                                          | 26                 | 180                                                           | 0.8                                                             | 75                                                                   | 38                                           | 49                        | 640                                   |
| V42MLA1206     | 42                                          | 30                 | 180                                                           | 0.8                                                             | 92                                                                   | 46                                           | 60                        | 640                                   |
| V48MLA1210     | 48                                          | 40                 | 250                                                           | 1.2                                                             | 105 at 2.5A                                                          | 54.5                                         | 66.5                      | 520                                   |
| V48MLA1210L    | 48                                          | 40                 | 220                                                           | 0.9                                                             | 105 at 2.5A                                                          | 54.5                                         | 66.5                      | 500                                   |
| V56MLA1206     | 56                                          | 40                 | 180                                                           | 1.0                                                             | 120                                                                  | 61                                           | 77                        | 180                                   |
| V60MLA1210     | 60                                          | 50                 | 250                                                           | 1.5                                                             | 130 at 2.5A                                                          | 67                                           | 83                        | 440                                   |
| V68MLA1206     | 68                                          | 50                 | 180                                                           | 1.0                                                             | 140                                                                  | 76                                           | 90                        | 180                                   |
| V85MLA1210     | 85                                          | 67                 | 250                                                           | 2.5                                                             | 180 at 2.5A                                                          | 95                                           | 115                       | 260                                   |
| V120MLA1210    | 120                                         | 107                | 125                                                           | 2.0                                                             | 260 at 2.5A                                                          | 135                                          | 165                       | 80                                    |

#### NOTES:

1. L suffix is a low capacitance and energy version; Contact your Littelfuse Sales Representative for custom capacitance requirements.
2. Typical leakage at 25°C < 25A, maximum leakage 100A at V<sub>M(DC)</sub>; for 0402 size, typical leakage < 5A, maximum leakage < 20A at V<sub>M(DC)</sub>.
3. Average power dissipation of transients for 0402, 0603, 0805, 1206 and 1210 sizes not to exceed 0.03W, 0.05W, 0.1W, 0.1W and 0.15W respectively.

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### **RoHS** ML Varistor Series

#### Temperature De-rating

When transients occur in rapid succession, the average power dissipation is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications table for the specific device. For applications exceeding 125°C ambient temperature, the peak surge current and energy ratings must be derated as shown in Figure 1.

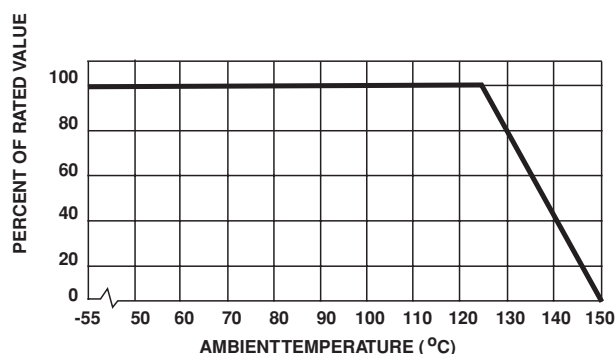


FIGURE 1. PEAK CURRENT AND ENERGY DERATING CURVE

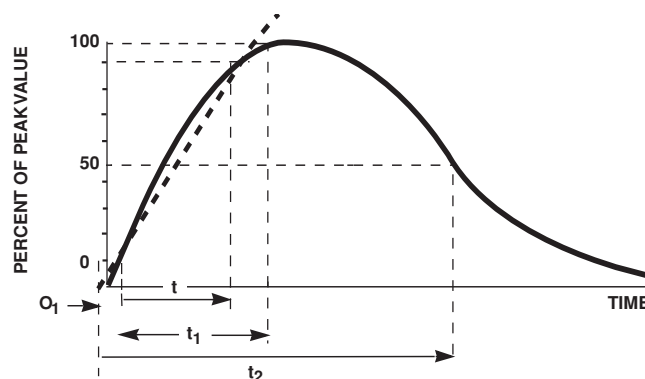


FIGURE 2. PEAK PULSE CURRENT TEST WAVEFORM FOR CLAMPING VOLTAGE

$O_1$  = VIRTUAL ORIGIN OF WAVE  
 $t$  = TIME FROM 10% TO 90% OF PEAK  
 $t_1$  = VIRTUAL FRONT TIME =  $1.25 \times t$   
 $t_2$  = VIRTUAL TIME TO HALFVALUE (IMPULSE DURATION)

EXAMPLE:  
 FOR AN  $8/20\mu s$  CURRENT WAVEFORM  
 $8\mu s = t_1$  = VIRTUAL FRONT TIME  
 $20\mu s = t_2$  = VIRTUAL TIME TO HALFVALUE

#### MLA0402 Limit VI Curves

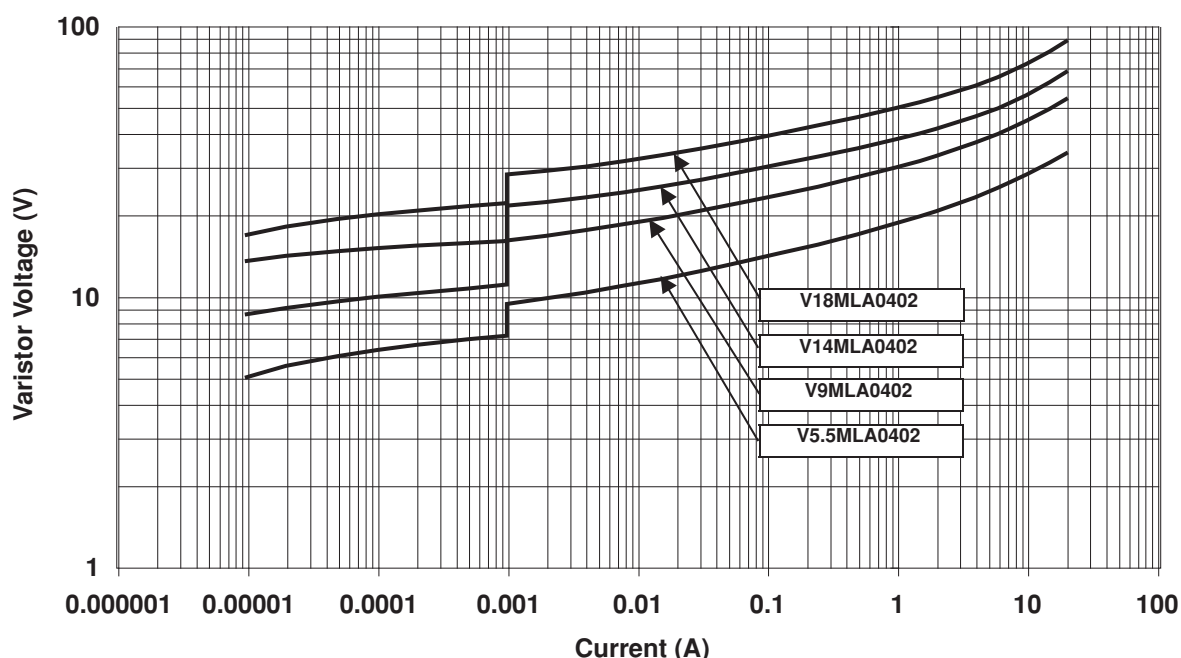


FIGURE 3. LIMIT V-I CHARACTERISTIC FOR V5.5MLA0402 TO V18MLA0402

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### RoHS ML Varistor Series

#### Maximum Transient V-I Characteristic Curves

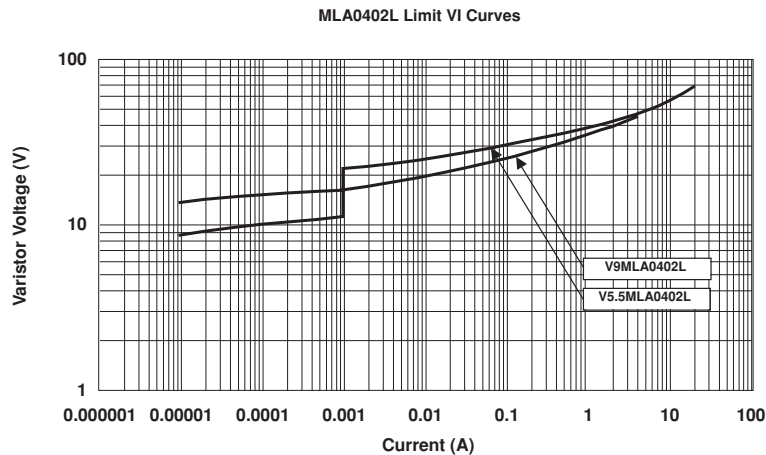


FIGURE 4. LIMIT V-I CHARACTERISTIC FOR V9MLA0402L

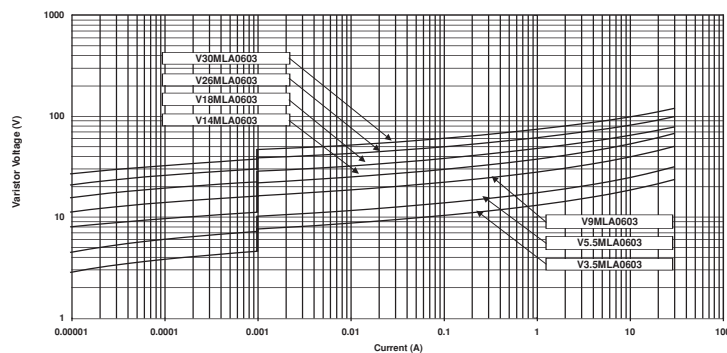


FIGURE 5. LIMIT V-I CHARACTERISTIC FOR V3.5MLA0603 TO V30MLA0603

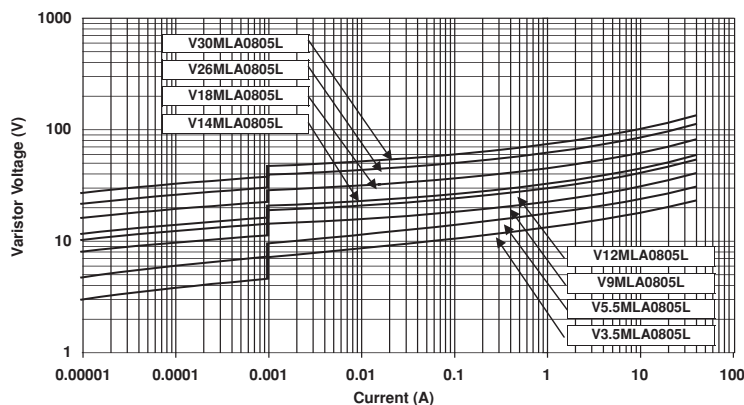


FIGURE 6. LIMIT V-I CHARACTERISTIC FOR V3.5MLA0805L TO V30MLA0805L

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### **RoHS** ML Varistor Series

#### Maximum Transient V-I Characteristic Curves (Continued)

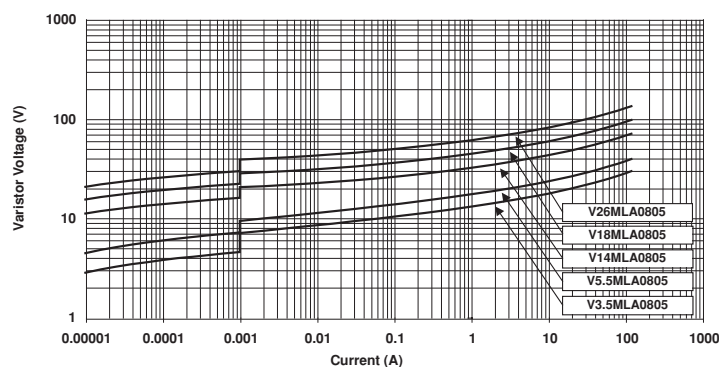


FIGURE 7. LIMIT V-I CHARACTERISTIC FOR V3.5MLA0805 TO V26MLA0805

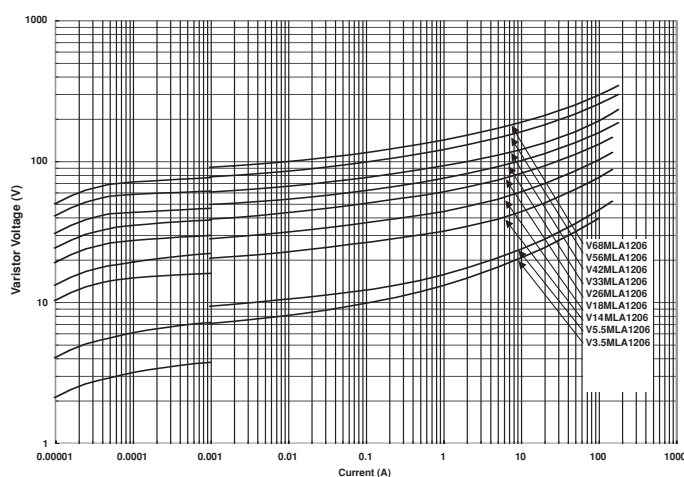


FIGURE 6. LIMIT V-I CHARACTERISTIC FOR V3.5MLA1206 TO V68MLA1206

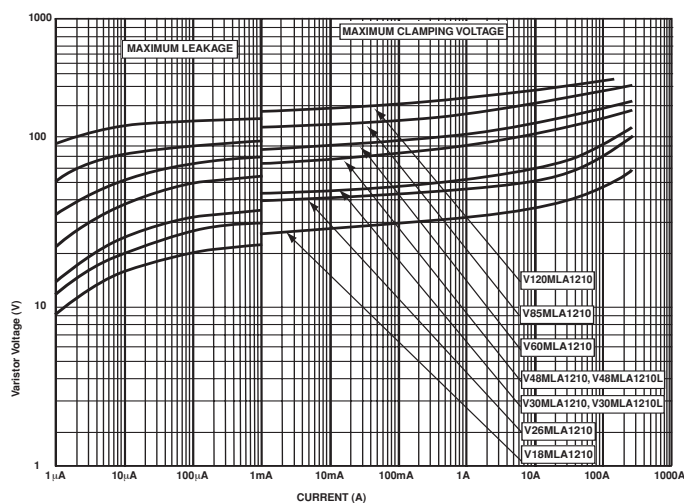


FIGURE 9. LIMIT V-I CHARACTERISTIC FOR V18MLA1210 TO V120MLA1210

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### RoHS ML Varistor Series

#### Device Characteristics

At low current levels, the V-I curve of the multilayer transient voltage suppressor approaches a linear (ohmic) relationship and shows a temperature dependent effect (Figure 10). At or below the maximum working voltage, the suppressor is in a high resistance mode (approaching  $10^9\Omega$  at its maximum rated working voltage). Leakage currents at maximum rated voltage are below  $50\mu\text{A}$ , typically  $25\mu\text{A}$ ; for 0402 size below  $10\mu\text{A}$ , typically  $5\mu\text{A}$ .

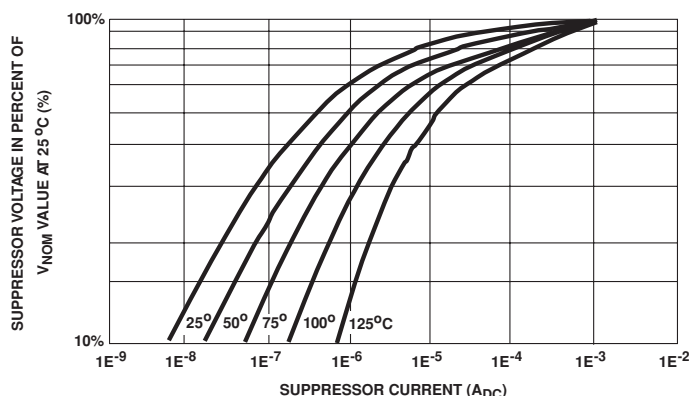


FIGURE 10. TYPICAL TEMPERATURE DEPENDENCE OF THE CHARACTERISTIC CURVE IN THE LEAKAGE REGION

#### Speed of Response

The Multilayer Suppressor is a leadless device. Its response time is not limited by the parasitic lead inductances found in other surface mount packages. The response time of the Zinc Oxide dielectric material is less than 1 nanosecond and the ML can clamp very fast  $dV/dt$  events such as ESD. Additionally, in "real world" applications, the associated circuit wiring is often the greatest factor effecting speed of response. Therefore, transient suppressor placement within a circuit can be considered important in certain instances.

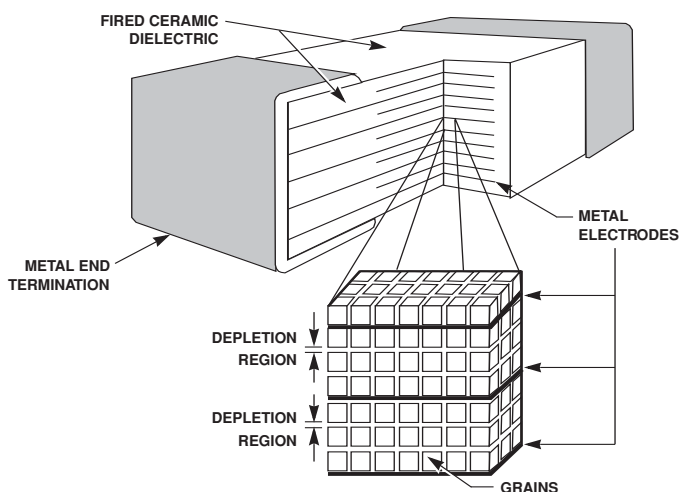


FIGURE 11. MULTILAYER INTERNAL CONSTRUCTION

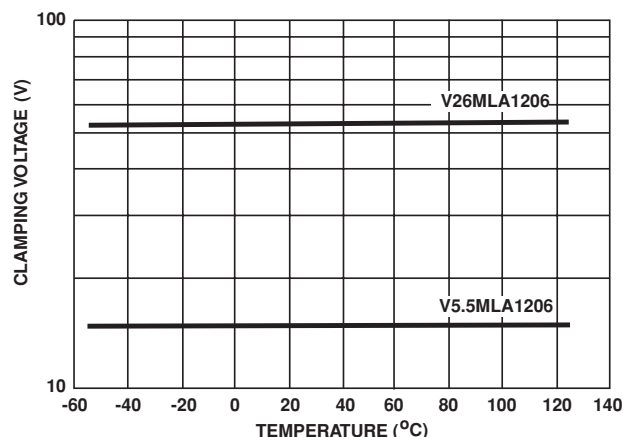


FIGURE 12. CLAMPING VOLTAGE OVER TEMPERATURE ( $V_C$  AT 10A)

#### Energy Absorption/Peak Current Capability

Energy dissipated within the ML is calculated by multiplying the clamping voltage, transient current and transient duration. An important advantage of the multilayer is its interdigitated electrode construction within the mass of dielectric material. This results in excellent current distribution and the peak temperature per energy absorbed is very low. The matrix of semiconducting grains combine to absorb and distribute transient energy (heat) (Figure 11). This dramatically reduces peak temperature; thermal stresses and enhances device reliability.

As a measure of the device capability in energy and peak current handling, the V26MLA1206A part was tested with multiple pulses at its peak current rating ( $150\text{A}$ ,  $8/20\mu\text{s}$ ). At the end of the test, 10,000 pulses later, the device voltage characteristics are still well within specification (Figure 13).

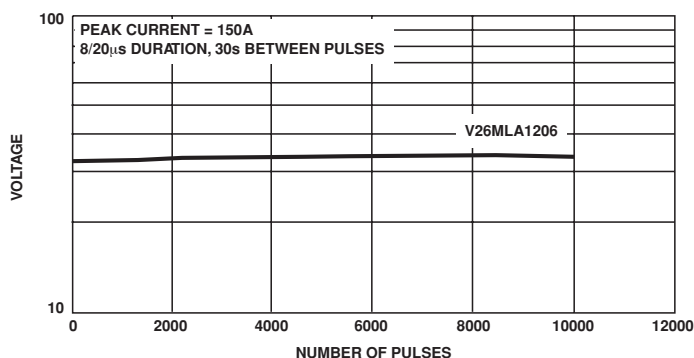


FIGURE 13. REPETITIVE PULSE CAPABILITY

## RoHS ML Varistor Series

### Soldering Recommendations

#### Lead (Pb) Soldering Recommendations

The principal techniques used for the soldering of components in surface mount technology are IR Re-flow & Wave soldering. Typical profiles are shown in Figures 14 & 15

The termination options available for each solder technique are:

| Reflow                        | Wave                          |
|-------------------------------|-------------------------------|
| 1. Nickel Barrier (preferred) | 1. Nickel Barrier (preferred) |
| 2. Silver/Platinum            | 2. Silver/Palladium           |

The recommended solder for the ML suppressor is a 62/36/2 (Sn/Pb/Ag), 60/40 (Sn/Pb) or 63/37 (Sn/Pb). Littelfuse also recommends an RMA solder flux.

Wave soldering is the most strenuous of the processes. To avoid the possibility of generating stresses due to thermal shock, a preheat stage in the soldering process is recommended, and the peak temperature of the solder process should be rigidly controlled.

When using a reflow process, care should be taken to ensure that the ML chip is not subjected to a thermal gradient steeper than 4 degrees per second; the ideal gradient being 2 degrees per second. During the soldering process, preheating to within 100 degrees of the solder's peak temperature is essential to minimize thermal shock.

Once the soldering process has been completed, it is still necessary to ensure that any further thermal shocks are avoided. One possible cause of thermal shock is hot printed circuit boards being removed from the solder process and subjected to cleaning solvents at room temperature. The boards must be allowed to cool gradually to less than 50°C before cleaning.

#### Lead-Free (Pb-free) Soldering Recommendations

Littelfuse offers the Nickel-Barrier termination finish for the optimum Pb-free solder performance.

The preferred solder is 96.5/3.0/0.5 (SnAgCu) with an RMA flux, but there is a wide selection of pastes & fluxes available with which the nickel barrier parts should be compatible.

The reflow profile must be constrained by maximums shown in Figure 16. For Pb-free Wave soldering, Figure 15 still applies.

Note: the Pb-free paste, flux & profile were used for evaluation purposes by Littelfuse, based upon industry standards & practices. There are multiple choices of all three available, it is advised that the customer explores the optimum combination for their process as processes vary considerably from site to site.

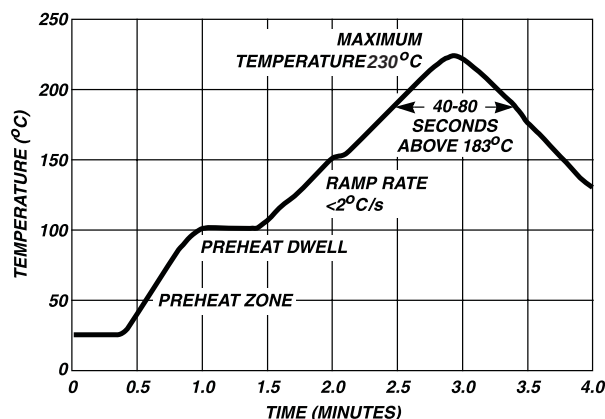


FIGURE 14. REFLOW SOLDER PROFILE

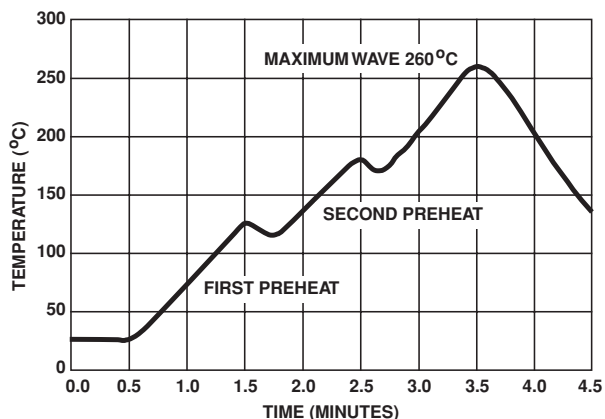


FIGURE 15. WAVE SOLDER PROFILE

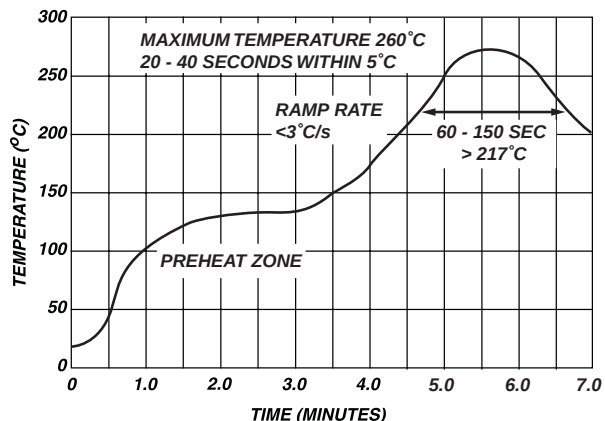



FIGURE 16. LEAD-FREE RE-FLOW SOLDER PROFILE

Surface Mount Varistors

Multilayer Transient Voltage Surge Suppressors

RoHS ML Varistor Series

Recommended Pad Outline

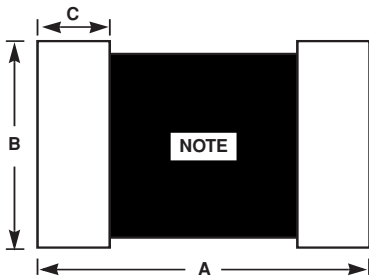

NOTE: Avoid metal runs in this area.

TABLE 1: PAD LAYOUT DIMENSIONS


| DIMENSION | PAD SIZE            |      |                     |      |                     |      |                     |      |                     |      |
|-----------|---------------------|------|---------------------|------|---------------------|------|---------------------|------|---------------------|------|
|           | 1210<br>SIZE DEVICE |      | 1206<br>SIZE DEVICE |      | 0805<br>SIZE DEVICE |      | 0603<br>SIZE DEVICE |      | 0402<br>SIZE DEVICE |      |
|           | IN                  | MM   | IN                  | MM   | IN                  | MM   | IN                  | MM   | IN                  | MM   |
| A         | 0.160               | 4.06 | 0.160               | 4.06 | 0.120               | 3.05 | 0.100               | 2.54 | 0.067               | 1.70 |
| B         | 0.100               | 2.54 | 0.065               | 1.65 | 0.050               | 1.27 | 0.030               | 0.76 | 0.020               | 0.51 |
| C         | 0.040               | 1.02 | 0.040               | 1.02 | 0.040               | 1.02 | 0.035               | 0.89 | 0.024               | 0.61 |

# Surface Mount Varistors

## Multilayer Transient Voltage Surge Suppressors

### **RoHS** ML Varistor Series


#### Mechanical Dimensions



| DIMENSION | CHIP SIZE    |            |              |            |              |             |              |           |              |            |
|-----------|--------------|------------|--------------|------------|--------------|-------------|--------------|-----------|--------------|------------|
|           | 1210         |            | 1206         |            | 0805         |             | 0603         |           | 0402         |            |
|           | IN           | MM         | IN           | MM         | IN           | MM          | IN           | MM        | IN           | MM         |
| D Max.    | 0.113        | 2.87       | 0.071        | 1.80       | 0.043        | 1.10        | 0.035        | 0.90      | 0.024        | 0.90       |
| E         | 0.02 ±0.01   | 0.50 ±0.25 | 0.02 ±0.01   | 0.50 ±0.25 | 0.02 ± 0.01  | 0.50 ± 0.25 | 0.015 ±0.008 | 0.4 ±0.2  | 0.010 ±0.006 | 0.25 ±0.15 |
| L         | 0.125 ±0.012 | 3.20 ±0.30 | 0.125 ±0.012 | 3.20 ±0.30 | 0.079 ±0.008 | 2.01 ±0.20  | 0.063 ±0.006 | 1.6 ±0.15 | 0.039 ±0.004 | 1.0 ±0.1   |
| W         | 0.10 ±0.012  | 2.54 ±0.30 | 0.06 ±0.011  | 1.60 ±0.28 | 0.049 ±0.008 | 1.25 ±0.20  | 0.032 ±0.06  | 0.8 ±0.15 | 0.020 ±0.004 | 0.5 ±0.1   |

#### Ordering Information

##### VXXML TYPES

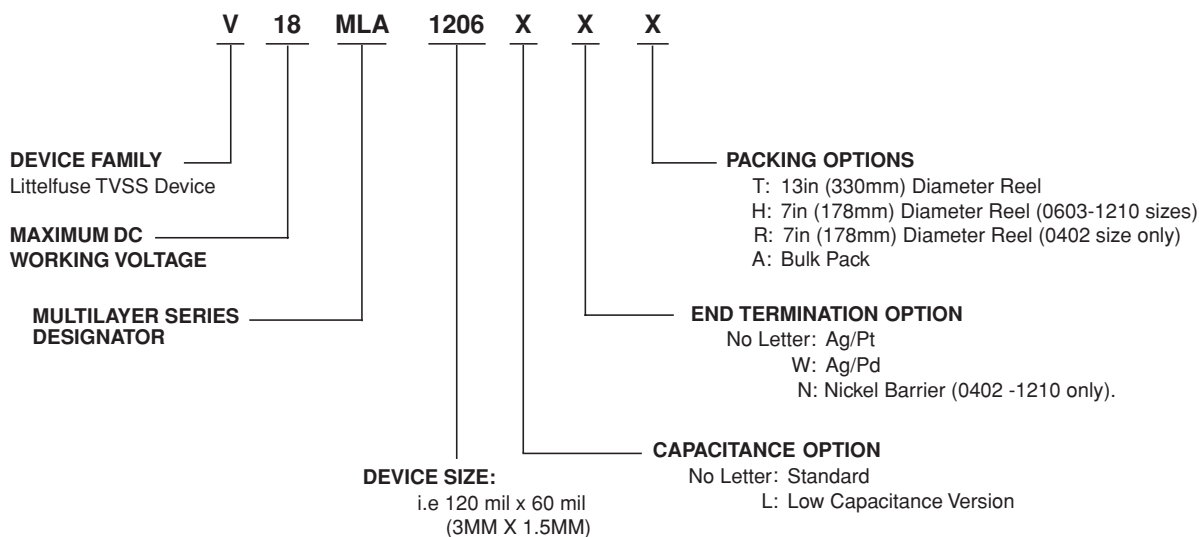

#### Standard Shipping Quantities

| DEVICE SIZE | "13" INCH REEL ("T" OPTION) | "7" INCH REEL ("H" OPTION) | BULK PACK ("A" OPTION) |
|-------------|-----------------------------|----------------------------|------------------------|
| 1210        | 8,000                       | 2,000                      | 2500                   |
| 1206        | 10,000                      | 2,500                      | 2500                   |
| 0805        | 10,000                      | 2,500                      | 2500                   |
| 0603        | 10,000                      | 2,500                      | 2500                   |
| 0402        | N/A                         | 10,000                     | N/A                    |

# Surface Mount Varistors



## Multilayer Transient Voltage Surge Suppressors

### RoHS ML Varistor Series

#### Tape and Reel Specifications

- Conforms to EIA - 481-1, Revision A
- Can be supplied to IEC Publication 286 - 3

| SYMBOL | DESCRIPTION                                                      | DIMENSIONS IN MILLIMETERS                    |                               |
|--------|------------------------------------------------------------------|----------------------------------------------|-------------------------------|
|        |                                                                  | 0402 Size                                    | 0603, 0805, 1206 & 1210 Sizes |
| $A_0$  | Width of Cavity                                                  | Dependent on Chip Size to Minimize Rotation. |                               |
| $B_0$  | Length of Cavity                                                 | Dependent on Chip Size to Minimize Rotation. |                               |
| $K_0$  | Depth of Cavity                                                  | Dependent on Chip Size to Minimize Rotation. |                               |
| W      | Width of Tape                                                    | $8 \pm 0.2$                                  |                               |
| F      | Distance Between Drive Hole Centers and Cavity Centers           | $3.5 \pm 0.05$                               |                               |
| E      | Distance Between Drive Hole Centers and Tape Edge                | $1.75 \pm 0.1$                               |                               |
| $P_1$  | Distance Between Cavity Centers                                  | $2 \pm 0.05$                                 | $4 \pm 0.1$                   |
| $P_2$  | Axial Drive Distance Between Drive Hole Centers & Cavity Centers | $2 \pm 0.1$                                  |                               |
| $P_0$  | Axial Drive Distance Between Drive Hole Centers                  | $4 \pm 0.1$                                  |                               |
| $D_0$  | Drive Hole Diameter                                              | $1.55 \pm 0.05$                              |                               |
| $D_1$  | Diameter of Cavity Piercing                                      | N/A                                          | $1.05 \pm 0.05$               |
| $T_1$  | Top Tape Thickness                                               | 0.1 Max                                      |                               |

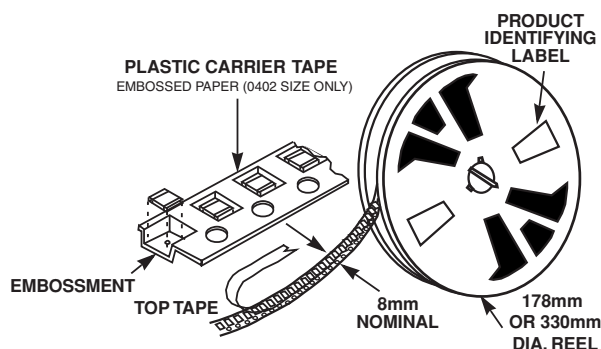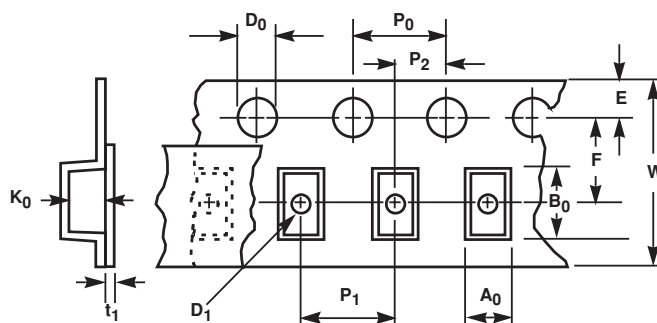



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331