

ULTRA HIGH SPEED SINGLE OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The **NJM2710** is an ultra high speed hex operational amplifier.

It can swings 260V/ μ s high slew rate and 1GHz gain band width product(10MHz typ. at 40dB) at 5V.

It is suitable for telecommunication related system, digital broadcasting system, high quality scanner and any other high speed signal processing system.

■ PACKAGR OUTLINE



NJM2710M




NJM2710V

■ FEATURES

- Operating Voltage (± 2.0 to ± 4.5 V)
- Operating Current (11.4mA typ. at $V^+/V^- = \pm 2.5$ V)
- High Slew Rate (260V/ μ s typ.)
- Gain Bandwidth Product (1GHz typ.)
- Bandwidth (10MHz typ. at 40dB)
- Unity Gain Bandwidth (180MHz typ.)
- Input Offset Voltage (7mV max.)
- Maximum Output Voltage (± 1.5 V typ. at $R_L = 1k\Omega$)
- Open Loop Voltage Gain (75dB typ.)
- Bipolar Technology
- Package Outline DMP20, SSOP20

■ PIN CONFIGURATION

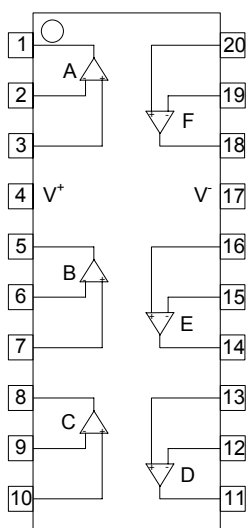

**NJM2710E
NJM2710V
(TOP VIEW)**

Pin Function

- | | |
|--------------|--------------|
| 1. A OUTPUT | 11. D OUTPUT |
| 2. A -INPUT | 12. D -INPUT |
| 3. A +INPUT | 13. D +INPUT |
| 4. V^+ | 14. E OUTPUT |
| 5. B OUTPUT | 15. E -INPUT |
| 6. B -INPUT | 16. E +INPUT |
| 7. B +INPUT | 17. V^- |
| 8. C OUTPUT | 18. F OUTPUT |
| 9. C -INPUT | 19. F -INPUT |
| 10. C +INPUT | 20. F +INPUT |

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	10	V
Differential Input Voltage	V_{ID}	± 2	V
Power Dissipation	P_D	(DMP20, SSOP20)375	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-50 to +150	°C

■ DC CHARACTERISTICS

($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Voltage Range	V^+/V^-		2.0	2.5	4.5	V
Operating Current	I_{CC}	No Signal	-	11.4	20.4	mA
Input Offset Voltage	V_{IO}		-	2.0	7.0	mV
Input Bias Current	I_B		-	2	7	μA
Input Offset Current	I_{IO}		-	350	900	nA
Open Loop Voltage Gain	A_v	$R_L = 2k\Omega$	65	75	-	dB
Input Common Mode Voltage Range	V_{ICM}		± 1.3	± 1.5	-	V
Common Mode Rejection	CMR	$-1V \leq V_{CM} \leq +1V$	50	60	-	dB
Supply Voltage Rejection	+SVR	$2.5V \leq V^+ \leq 5V$, $R_L = 2k\Omega$	50	60	-	dB
	-SVR	$-5V \leq V^- \leq -2.5V$, $R_L = 2k\Omega$	50	60	-	dB
Maximum Output Voltage	V_{OM}	$R_L = 1k\Omega$	± 1.2	± 1.5	-	V

■ AC CHARACTERISTICS

($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Bandwidth	BW	$A_v = 40dB$, $R_f = 1.98k\Omega$, $R_L = \infty$, $C_L = 10pF$	-	10	-	MHz
Unity Gain Bandwidth	f_T	$A_v = 40dB$, $R_g = 20\Omega$, $R_f = 1.98k\Omega$, $R_L = \infty$, $C_L = 10pF$	-	180	-	MHz
Phase Margin	ϕ_M	$A_v = 40dB$, $R_g = 20\Omega$, $R_f = 1.98k\Omega$, $R_L = \infty$, $C_L = 10pF$	-	38	-	deg
Equivalent Input Noise Voltage	V_{NO}		-	6.8	-	nV/ $\sqrt{Hz}$

■ TRANSIENT CHARACTERISTICS

($V^+/V^- = \pm 2.5V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	+SR	$A_v = 6dB$, $R_f = 1k\Omega$, $R_g = 1k\Omega$	-	260	-	V/ μs
	-SR	$R_L = \infty$, $C_L = 10pF$	-	260	-	V/ μs

■ Note:


non-inverting amplifier

1. The closed gain should be 6dB or higher to prevent the oscillation.
Unity gain follower application may cause the oscillation.
2. When the closed gain is lower than 20dB, use a compensation capacitor (CF: about 5pF), parallel with the feedback resistor RF to avoid oscillation.
3. Recommended feedback resistor is less than 2kΩ to keep the flatness of the frequency response.
4. Minimize the load capacitor for the better performance.
A large load capacitor CL reduces the frequency response and causes oscillation or ringing.


inverting amplifier

1. When the closed gain is lower than 20dB, use a compensation capacitor (CF; recommended from 1pF to 5pF), parallel with the feedback resistor RF to avoid oscillation.
2. Minimize the feedback resistor to keep the frequency response and the slew rate.
(recommended about 1k-ohm)
The proper compensation capacitor CF can counteract oscillation even with a large feedback resistor RF.
3. Total load capacitance should be not more than 100pF.
The oscillation margin may be affected by the total load capacitance.







non-inverting amplifier

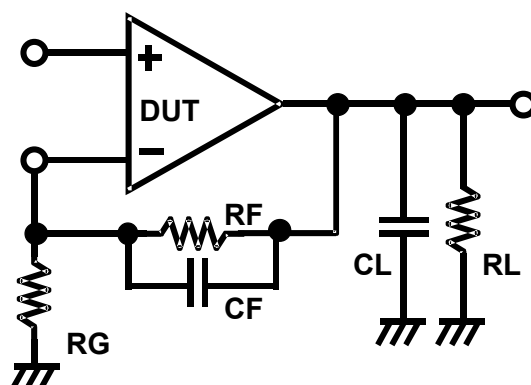




inverting amplifier

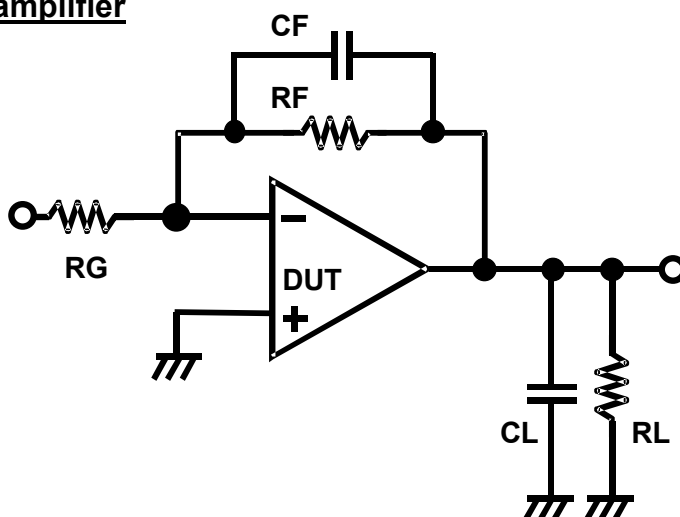







■ TYPICAL CHARACTERISTICS

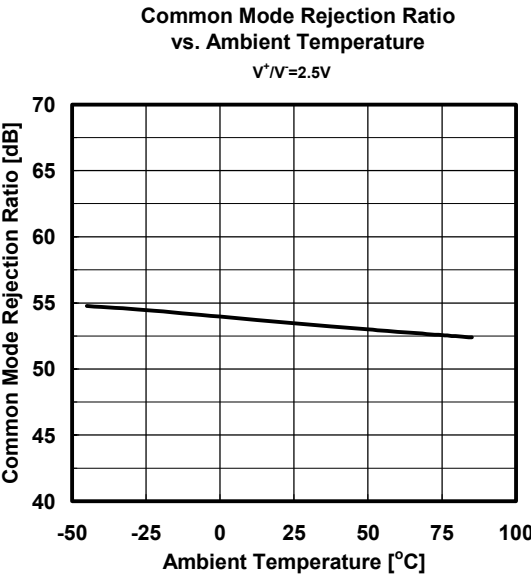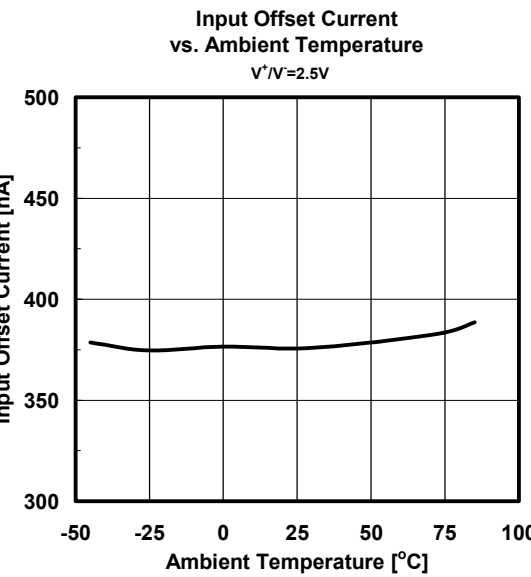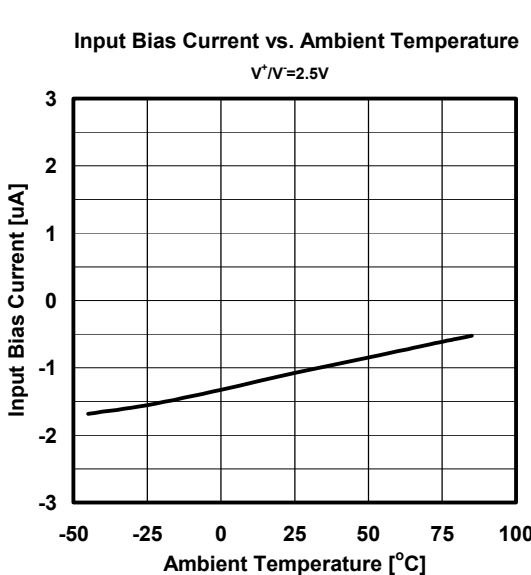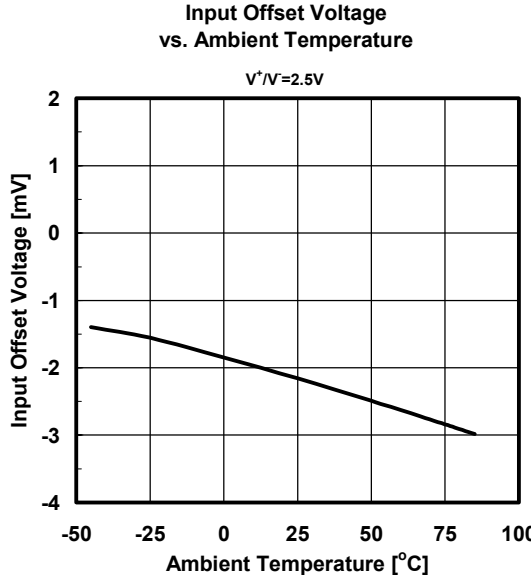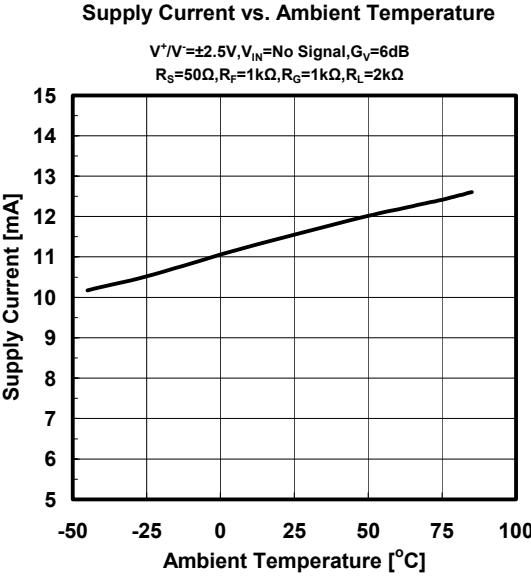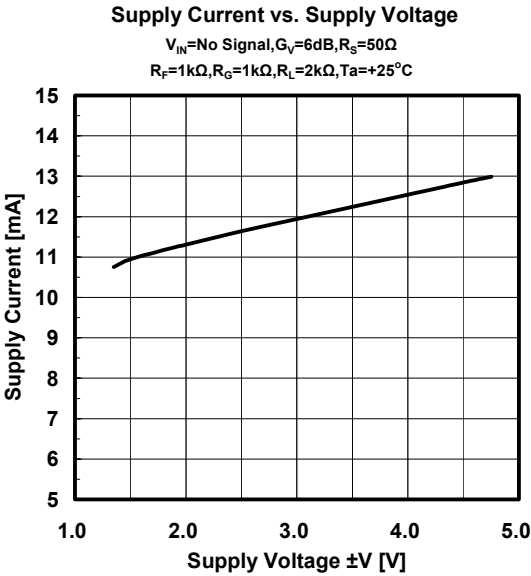





■ TYPICAL CHARACTERISTICS

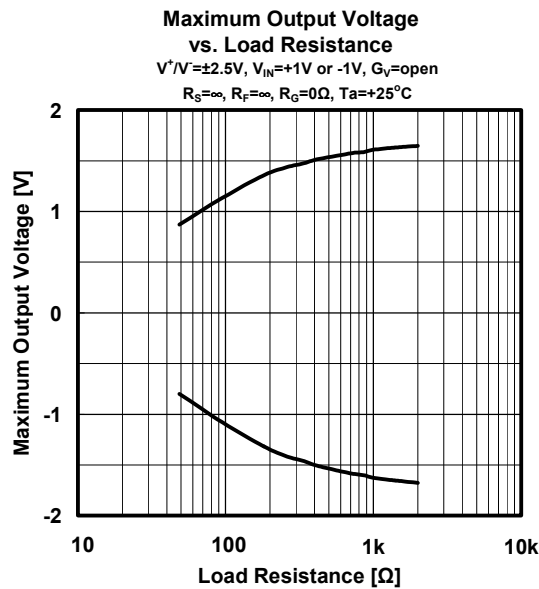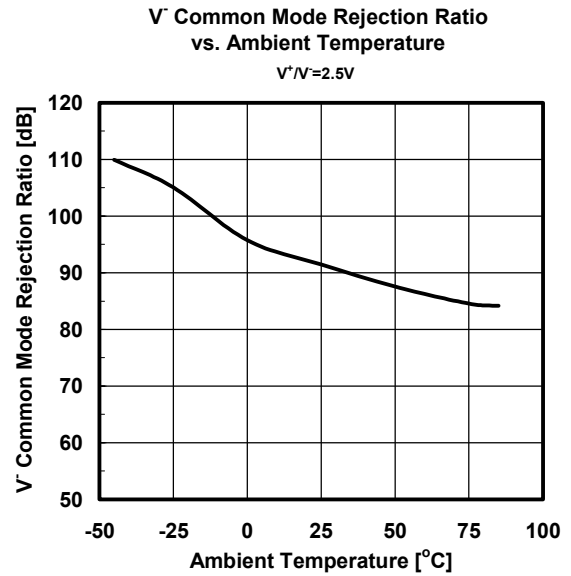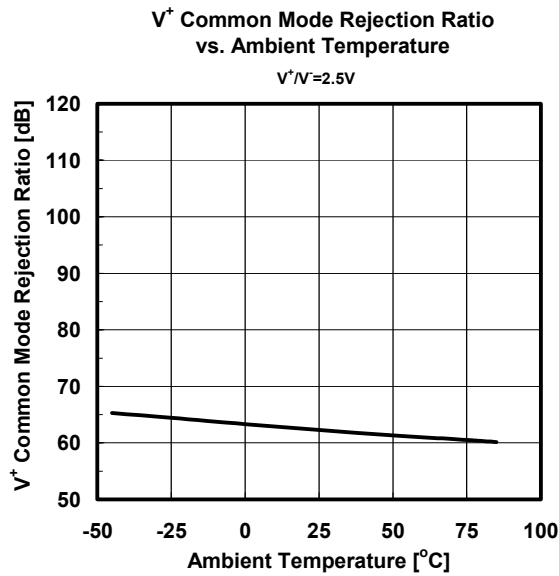


■ TYPICAL CHARACTERISTICS

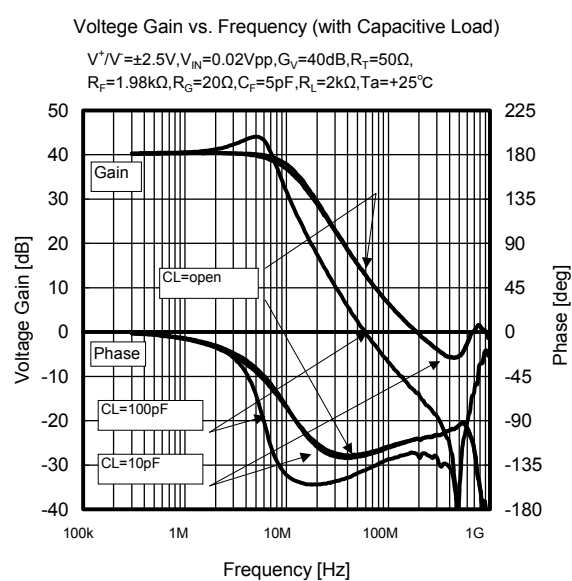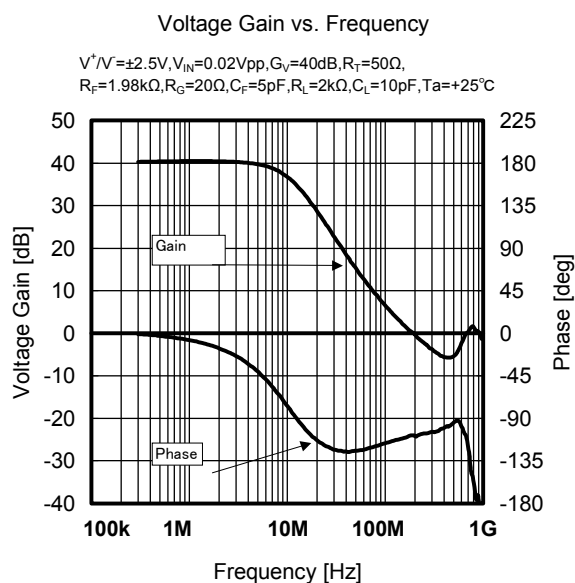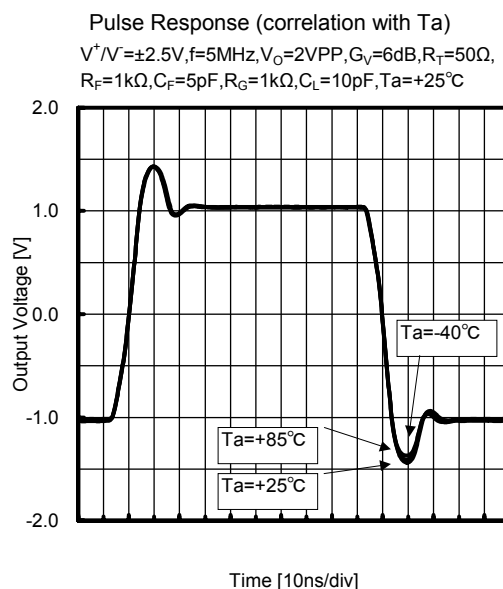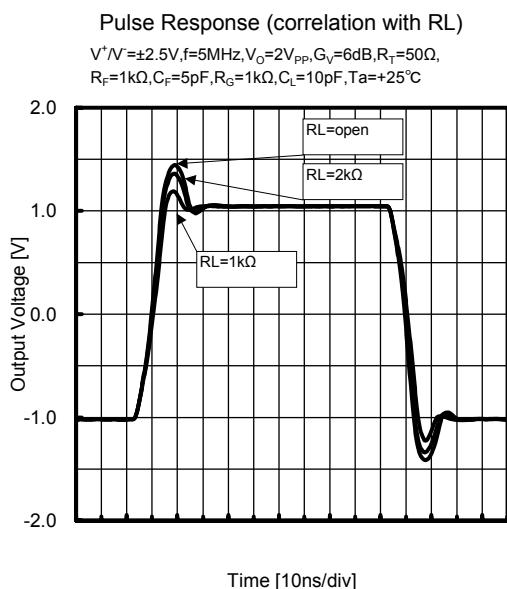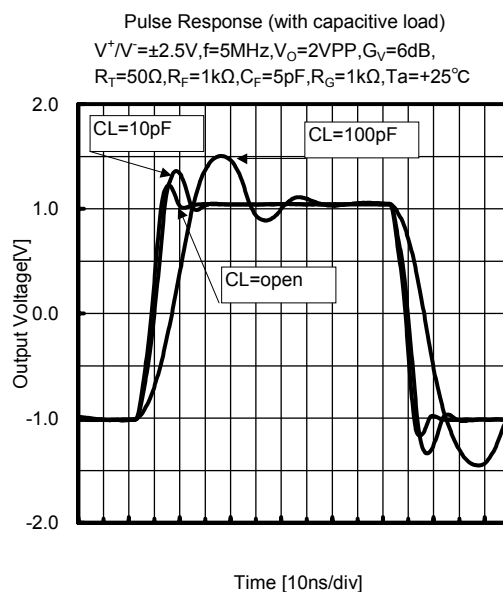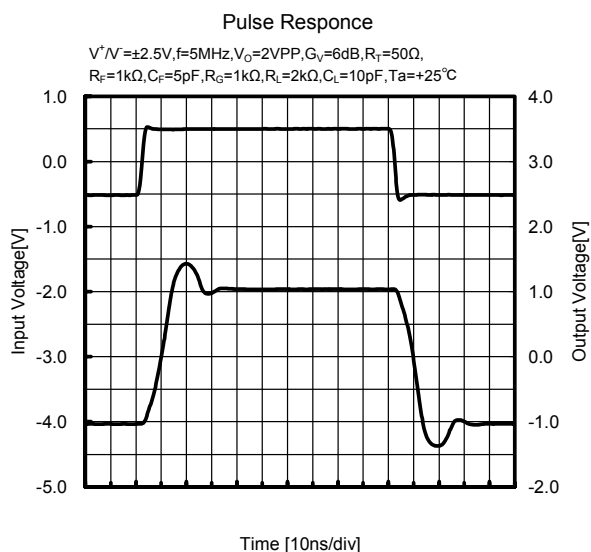

TYPICAL CHARACTERISTICS

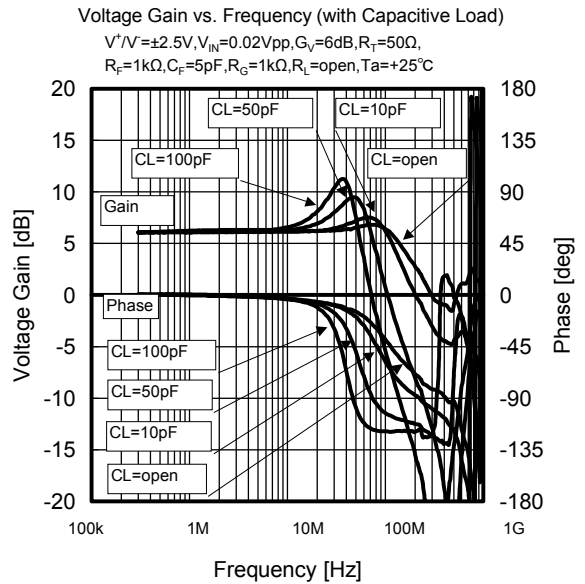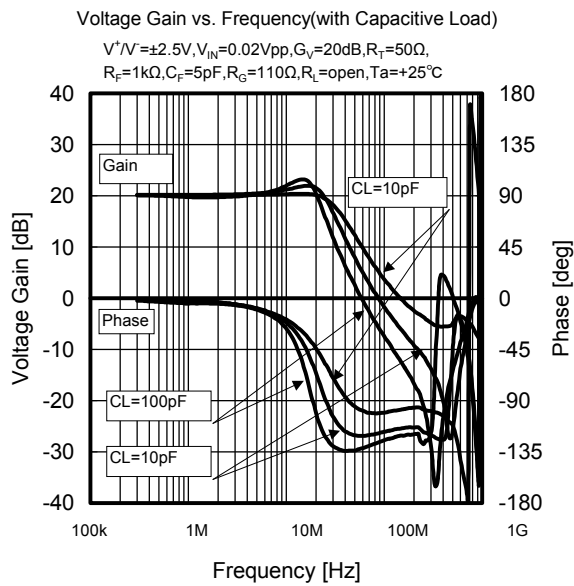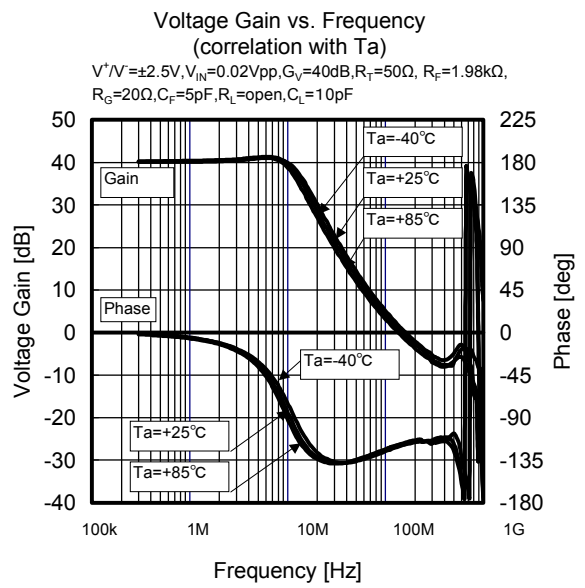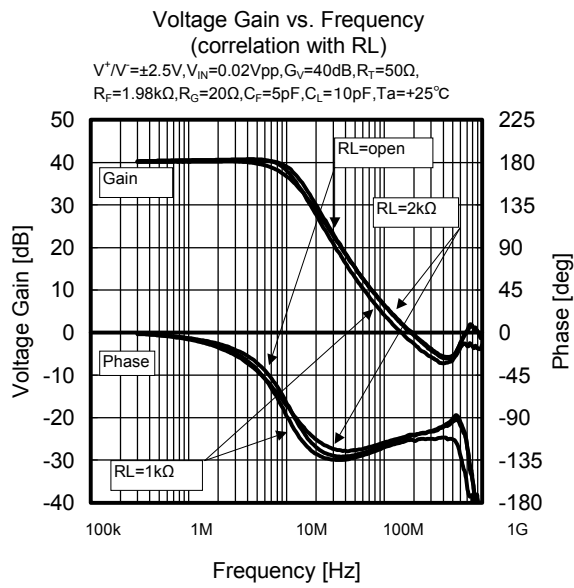

■ MEASUREMENT CIRCUIT

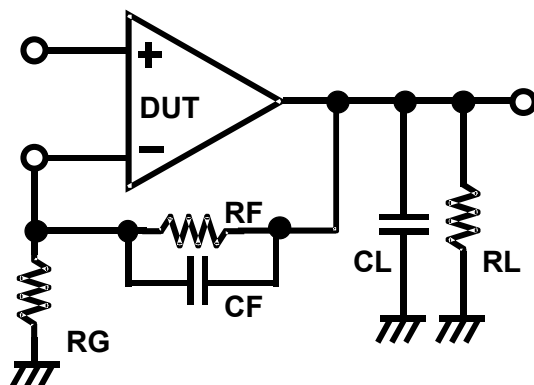

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331