


RFXF0008

1:2.78 SMT Transformer
45MHz to 1218MHz

The RFXF0008 transformer is designed for applications that require small, low cost and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. These units are built lead-free and RoHS compliant. S-Parameters are available on request.

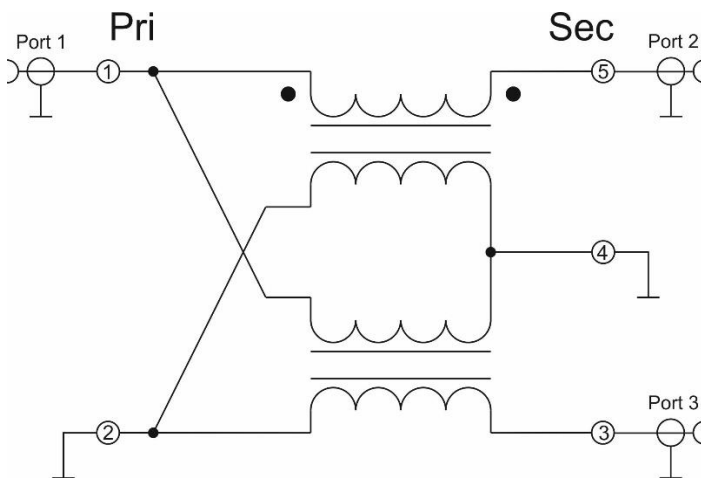

Functional Block Diagram



Package: SP6

Features

- 45MHz to 1218MHz Operation
- Low Cost and RoHS Compliant
- Industry Standard SMT Package
- Available in Tape-and-Reel
- 75 Ω Characteristic Impedance

Applications

- Broadband/CATV
- Wireless

Ordering Information

RFXF0008SB	Sample bag with 5 pieces
RFXF0008SQ	Sample bag with 25 pieces
RFXF0008SR	13" Sample reel with 100 pieces
RFXF0008TR13	13" Reel with 1000 pieces

RFXF0008

Absolute Maximum Ratings

Parameter	Rating	Unit
RF Power	2	W
Operating Temperature Range	-40 to +100	°C
Storage Temperature Range	-55 to +100	°C







RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2011/65/EU

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.


Nominal Operating Parameters

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
General Performance. Typical values represent Mid Band performance at T=25°C					
Operating Frequency Range	45		1218	MHz	
Insertion Loss		1.6	2.0	dB	45 MHz to 200 MHz
		1.5	2.0	dB	200 MHz to 600 MHz
		1.9	2.5	dB	600 MHz to 1000 MHz
		2.2	2.8	dB	1000 MHz to 1218 MHz
Input Return Loss	12	14		dB	45 MHz
	12	14		dB	45 MHz to 100 MHz
	15	17		dB	100 MHz to 400 MHz
	14	16		dB	400 MHz to 700 MHz
	12	16		dB	700 MHz to 1000 MHz
	11	14		dB	1000 MHz to 1218 MHz
Amplitude Balance		0.3	0.5	dB	45 MHz to 200 MHz
		0.4	1.0	dB	200 MHz to 600 MHz
		0.4	1.0	dB	600 MHz to 1000 MHz
		0.4	1.0	dB	1000 MHz to 1218 MHz
Phase Balance		2	3	°	45 MHz, Nominal Phase Difference is 180°
		5	10	°	45 MHz to 300 MHz, Nominal Phase Difference is 180°
		13	18	°	300 MHz to 600 MHz, Nominal Phase Difference is 180°
		20	26	°	600 MHz to 1000 MHz, Nominal Phase Difference is 180°
		21	26	°	1000 MHz to 1218 MHz, Nominal Phase Difference is 180°
DC Current Capability (in CT)			500	mA	
Impedance Ratio	1:2.78				
Type – Transmission Line	Balanced to Balanced				

Typical Performance: T=25°C unless otherwise noted

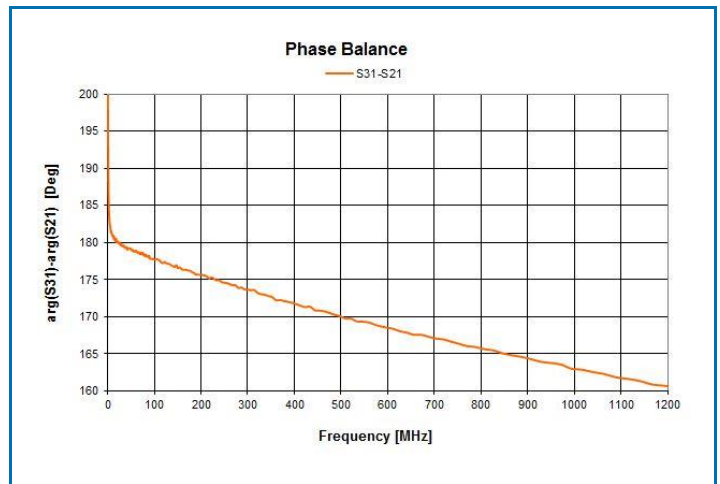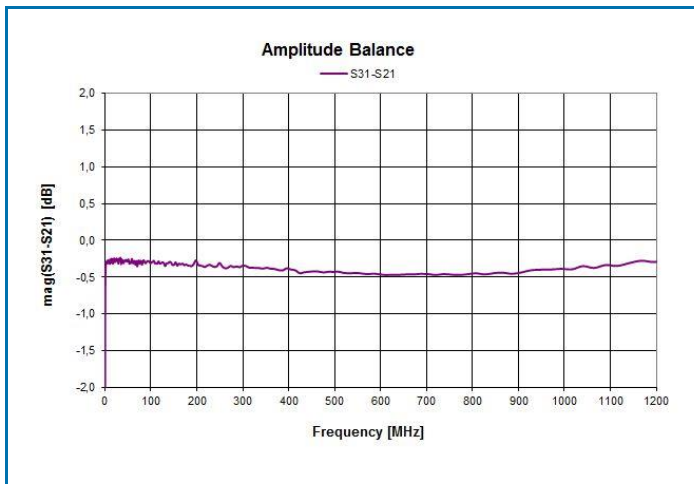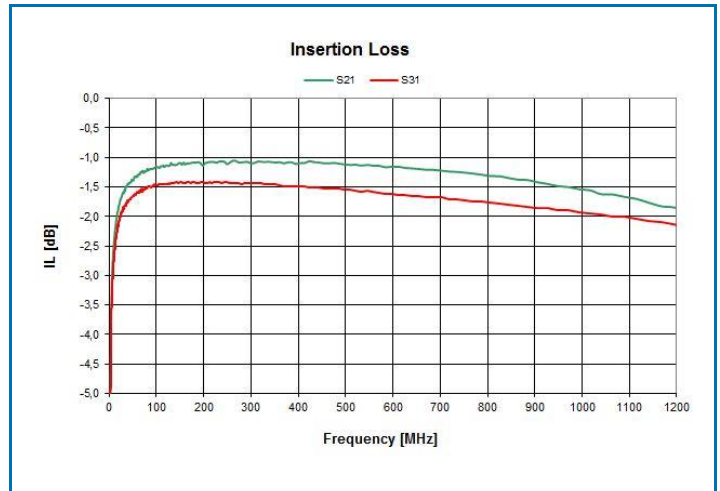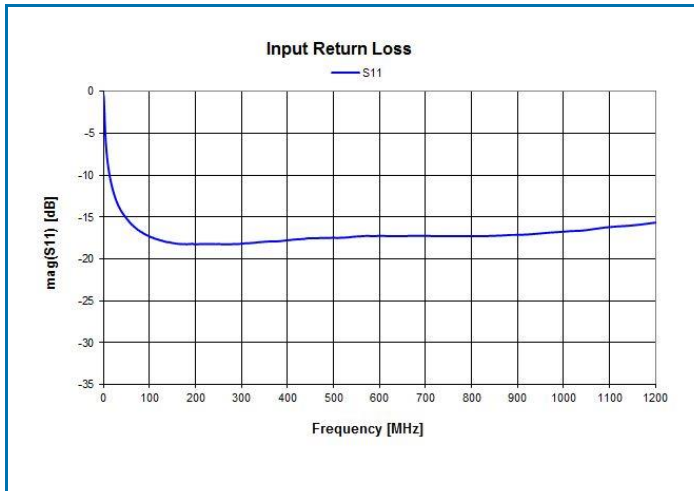

Package Outline, Pin Out and Branding Drawing (Dimensions in inches [millimeters])

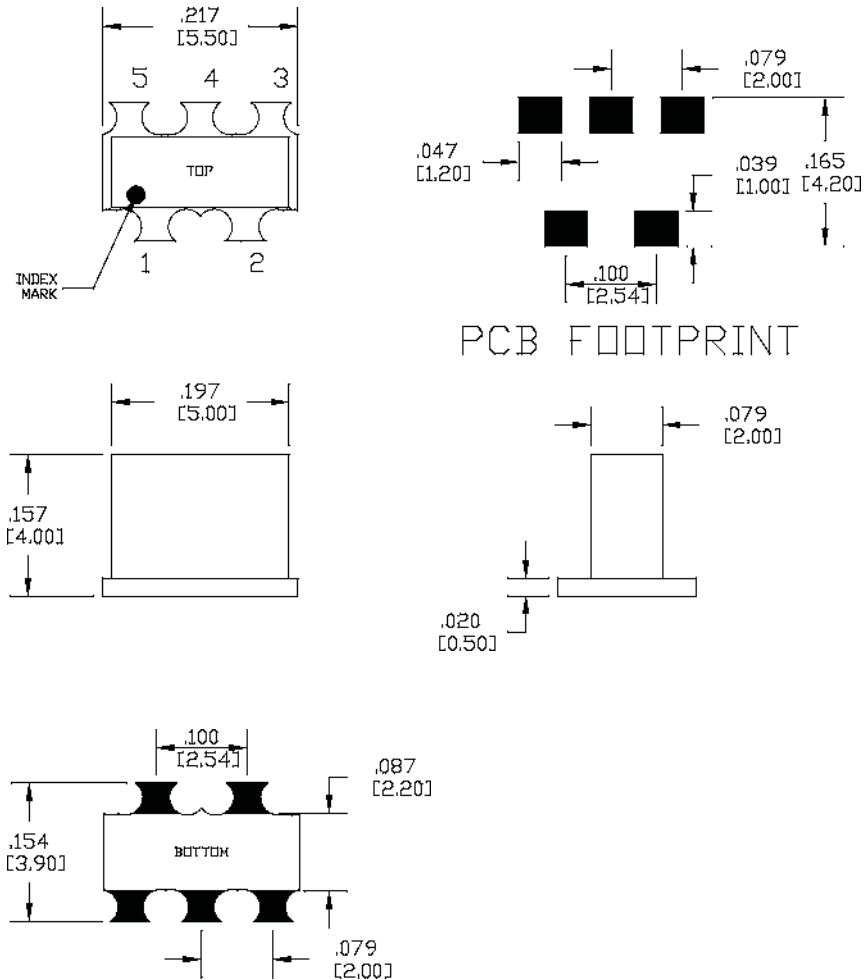

RFXF0008



Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.rfmd.com

Tel: 1-844-890-8163

Email: customer.support@qorvo.com

For information about the merger of RFMD and TriQuint as Qorvo:

Web: www.qorvo.com

Important Notice

The information contained herein is believed to be reliable. RFMD makes no warranties regarding the information contained herein. RFMD assumes no responsibility or liability whatsoever for any of the information contained herein. RFMD assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RFMD products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RFMD products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331