


**C×R type SSOP package**  
**60 V, 80 V and 100 V**  
**load voltage**

**PhotoMOS®**  
**RF SSOP 1 Form A C×R**  
**(AQY22○○○V)**



**RoHS compliant**

### FEATURES

- 1. Miniature SSOP package**  
 (Compared to SOP 4-pin models, volume ratio can be reduced by approximately 53%.)
- 2. Load voltage: 60 V, 80 V and 100 V**
- 3. Low C×R**  
 Low on resistance and low output capacitance available
  - 60 V load voltage  
 Output capacitance: Typ. 27 pF, On resistance: Typ. 0.8Ω
  - 80 V load voltage  
 Output capacitance: Typ. 4.5 pF, On resistance: Typ. 10.5Ω
  - 100 V load voltage  
 Output capacitance: Typ. 5.8 pF, On resistance: Typ. 8.8Ω
- 4. Turn on time**  
 80 V and 100 V load voltage type: Typ. 0.05 ms

### TYPICAL APPLICATIONS

- 1. Measuring and testing equipment**  
 Semiconductor testing equipment, Probe cards, Datalogger, Board tester and other testing equipment
- 2. Telecommunication and broadcasting equipment**
- 3. Medical equipment**  
 Ultrasonic wave diagnostic machine
- 4. Multi-point recorder**  
 Data logger, Warping and Thermocouple, etc.

\*Does not support automotive applications.

### TYPES

Type	Output rating*1		Part No. (Tape and reel packing style)*2		Packing quantity in the tape and reel
	Load voltage	Load current	Picked from the 1 and 4-pin side	Picked from the 2 and 3-pin side	
AC/DC dual use	60 V	400 mA	AQY222R2VY	AQY222R2VW	3,500 pcs.
	80 V	120 mA	AQY225R2VY	AQY225R2VW	
	100 V	120 mA	AQY225R3VY	AQY225R3VW	

Notes: \*1. Indicate the peak AC and DC values.

\*2. Only tape and reel package is available. Packing quantity of 1,000 pieces is possible. Please consult us.

For space reasons, the three initial letters of the part number "AQY", the package (SSOP) indication "V", and the packaging style "Y" or "W" are not marked on the device.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Remarks
Input side	LED forward current	$I_F$	50 mA			
	LED reverse voltage	$V_R$	5 V			
	Peak forward current	$I_{FP}$	1 A			$f = 100 \text{ Hz}$ , Duty factor = 0.1%
	Power dissipation	$P_{in}$	75 mW			
Output side	Load voltage (peak AC)	$V_L$	60 V	80 V	100 V	
	Continuous load current	$I_L$	0.4 A	0.12 A		Peak AC, DC
	Peak load current	$I_{peak}$	1.2 A	0.3 A		100 ms (1shot), $V_L = \text{DC}$
	Power dissipation	$P_{out}$	250 mW			
Total power dissipation		$P_T$	300 mW			
I/O isolation voltage		$V_{iso}$	1,500 Vrms			
Ambient temperature	Operating	$T_{opr}$	-40 to +85°C -40 to +185°F			(Non-icing at low temperatures)
	Storage	$T_{stg}$	-40 to +100°C -40 to +212°F			


### 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQY222R2V	AQY225R2V	AQY225R3V	Condition	
Input	LED operate current	Typical	$I_{Fon}$	0.5 mA			AQY222R2V: $I_L = 400 \text{ mA}$ AQY225R2V: $I_L = 80 \text{ mA}$ AQY225R3V: $I_L = 80 \text{ mA}$	
		Maximum		3.0 mA				
	LED turn off current	Minimum	$I_{Foff}$	0.1 mA				
		Typical		0.45 mA				
LED dropout voltage	Typical	$V_F$	1.32 V (1.14 V at $I_F = 5 \text{ mA}$ )			$I_F = 50 \text{ mA}$		
	Maximum		1.5 V					
Output	On resistance	Typical	$R_{on}$	0.8Ω	10.5Ω	8.8Ω	AQY222R2V: $I_F = 5 \text{ mA}$ , $I_L = 400 \text{ mA}$ AQY225R2V: $I_F = 5 \text{ mA}$ , $I_L = 80 \text{ mA}$ AQY225R3V: $I_F = 5 \text{ mA}$ , $I_L = 80 \text{ mA}$ Within 1 s	
		Maximum		1.25Ω	15Ω	14Ω		
	Output capacitance	Typical	$C_{out}$	27 pF	4.5 pF	5.8 pF		
		Maximum		40 pF	6 pF	8 pF		
Off state leakage current	Typical	$I_{Leak}$	—			$I_F = 0 \text{ mA}$ , $V_L = \text{Max.}$		
	Maximum		*10 nA					
Transfer characteristics	Turn on time**	Typical	$T_{on}$	0.15 ms	0.05 ms		AQY222R2V: $I_F = 5 \text{ mA}$ , $V_L = 10 \text{ V}$ , $R_L = 100\Omega$ AQY225R2V: $I_F = 5 \text{ mA}$ , $V_L = 10 \text{ V}$ , $R_L = 125\Omega$ AQY225R3V: $I_F = 5 \text{ mA}$ , $V_L = 10 \text{ V}$ , $R_L = 125\Omega$	
		Maximum		0.5 ms				
	Turn off time**	Typical	$T_{off}$	0.08 ms	0.05 ms			
		Maximum		0.2 ms				
	I/O capacitance	Typical	$C_{iso}$	0.8 pF				$f = 1 \text{ MHz}$ , $V_B = 0 \text{ V}$
		Maximum		1.5 pF				
Initial I/O isolation resistance	Minimum	$R_{iso}$	1,000 MΩ			500 V DC		

Note: Variation possible through combinations of output capacitance and on resistance. For more information, please contact our sales office in your area.

\*Available as custom orders (1 nA or less)

\*\*Turn on/Turn off time

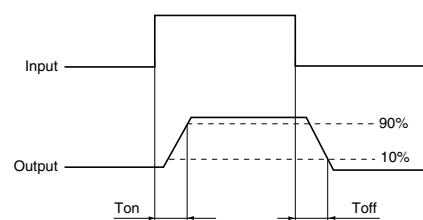

### 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
LED current		$I_F$	5	30	mA
AQY222R2V	Load voltage (Peak AC)	$V_L$	—	30	V
	Continuous load current	$I_L$	—	0.4	A
AQY225R2V	Load voltage (Peak AC)	$V_L$	—	40	V
	Continuous load current	$I_L$	—	0.12	A
AQY225R3V	Load voltage (Peak AC)	$V_L$	—	50	V
	Continuous load current	$I_L$	—	0.12	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

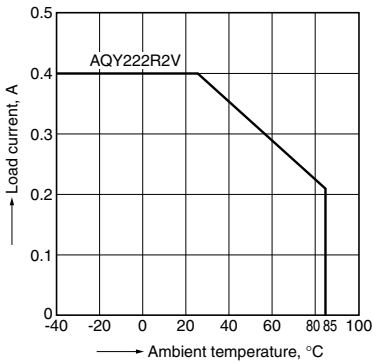


1.-(2) Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

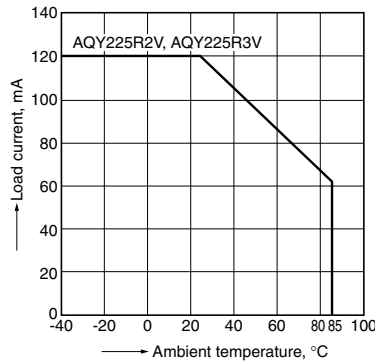


2.-(1) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: 10V (DC)  
Continuous load current: Max. (DC)

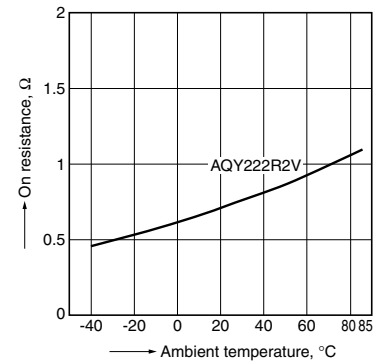


2.-(2) On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

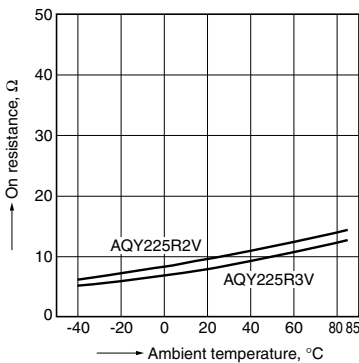


3.-(1) Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 100mA (DC)

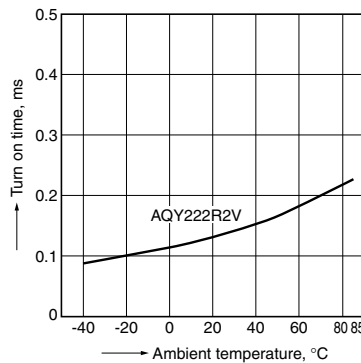


3.-(2) Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

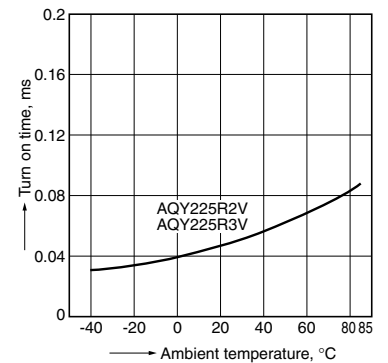


4.-(1) Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 100mA (DC)

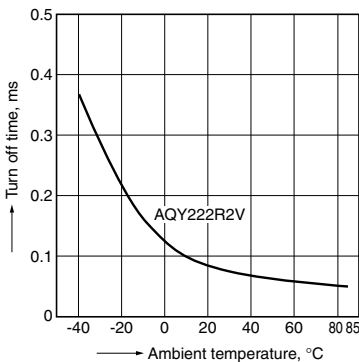


4.-(2) Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

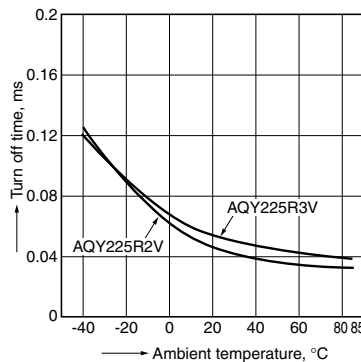

5.-(1) LED operate current vs. ambient temperature characteristics


Load voltage: 10V (DC);  
Continuous load current: 400mA (DC)

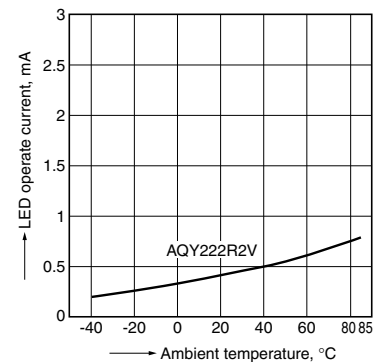

# RF SSOP 1 Form A CxR (AQY22000V)


5.-(2) LED operate current vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

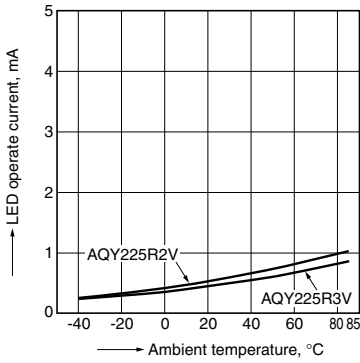


6.-(1) LED turn off current vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 400mA (DC)

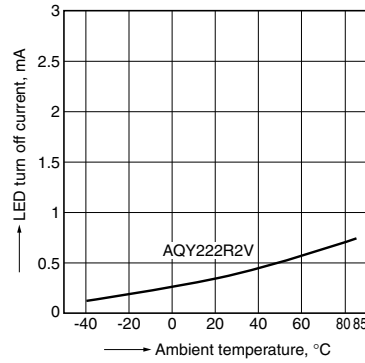


6.-(2) LED turn off current vs. ambient temperature characteristics

Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

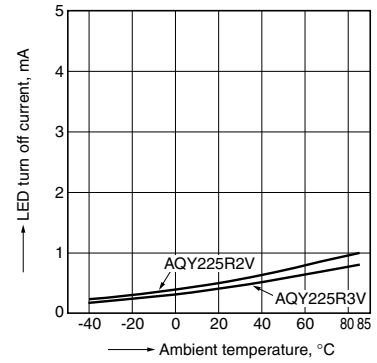


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

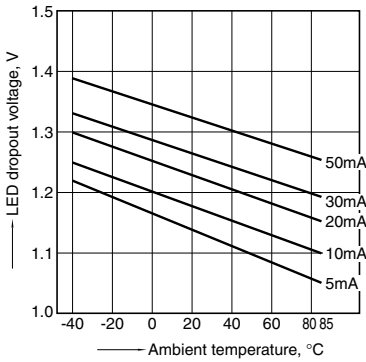


8.-(1) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4;  
Ambient temperature: 25°C 77°F




8.-(2) Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 3 and 4;  
Ambient temperature: 25°C 77°F




9.-(1) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;  
Ambient temperature: 25°C 77°F

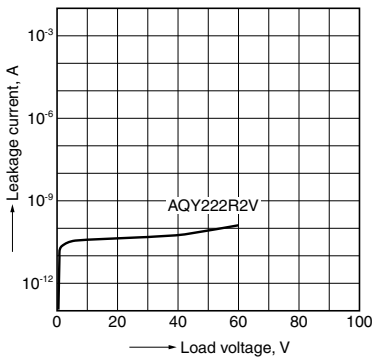


9.-(2) Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 3 and 4;  
Ambient temperature: 25°C 77°F

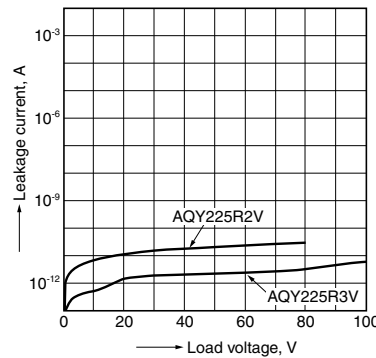


10.-(1) Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

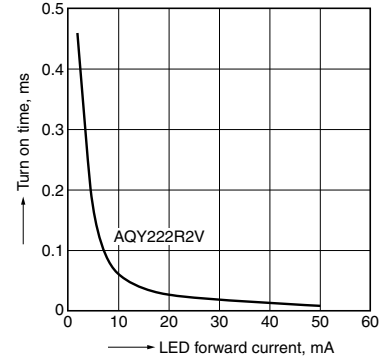


10.-(2) Turn on time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

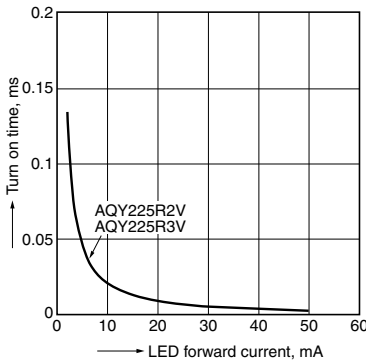


11.-(1) Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 100mA (DC); Ambient temperature: 25°C 77°F

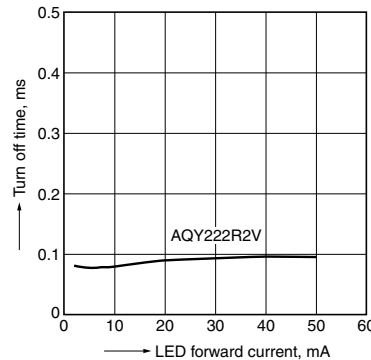


11.-(2) Turn off time vs. LED forward current characteristics

Measured portion: between terminals 3 and 4;  
Load voltage: 10V (DC); Continuous load current: 80mA (DC); Ambient temperature: 25°C 77°F

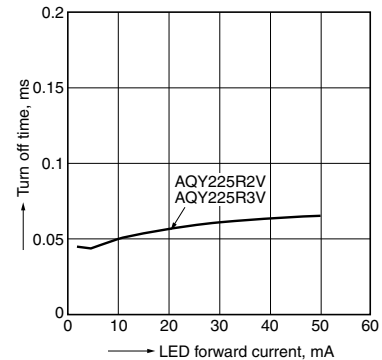


12.-(1) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4;  
 Measurement signal: 1 MHz;  
 Ambient temperature: 25°C 77°F

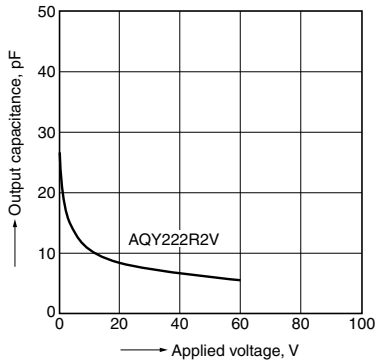

12.-(2) Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 3 and 4;  
 Measurement signal: 1 MHz;  
 Ambient temperature: 25°C 77°F

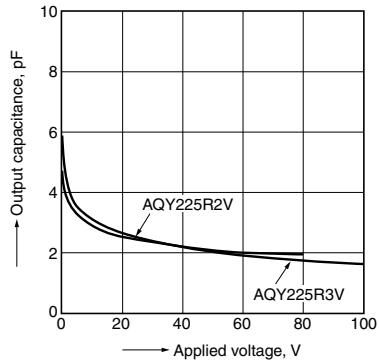

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[AQY225R2V](#) [AQY225R2VW](#) [AQY225R2VY](#) [AQY222R2V](#) [AQY225R3V](#) [AQY222R2VW](#) [AQY222R2VY](#)  
[AQY225R3VY](#) [AQY225R3VW](#)



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331