


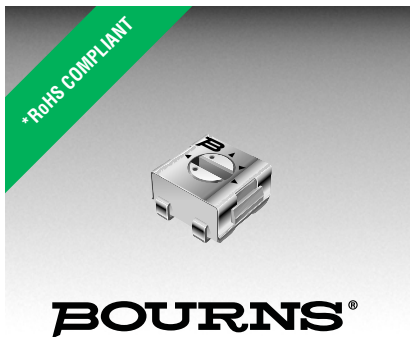

## Features

- Surface Mount / Single Turn / Cermet Industrial / Sealed
- Compatible with surface mount manufacturing processes
- Compatible with popular vacuum pick-and-place equipment
- J-hook, gull-wing and pinned configurations

- Side adjust available
- Meets EIA/EIAJ/IPC/VECI SMD standard trimmer designs
- RoHS compliant\* - see [processing information](#) on lead free surface mount trimmers
- For trimmer applications/processing guidelines, [click here](#)

## 3314 - 4 mm Square Trimpot® Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range  
..... 10 ohms to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....  $\pm 20\%$  std.  
(tighter tolerance available)  
End Resistance ..... 1 % or 2 ohms max.  
(whichever is greater)  
Contact Resistance Variation  
..... 3 % or 3 ohms  
Resolution ..... Infinite  
Insulation Resistance ..... 500 vdc.  
100 megohms min.  
Dielectric Strength  
Sea Level ..... 500 vac (1 minute)  
Adjustment Angle .....  $210^\circ$  nom.

### Environmental Characteristics


Power Rating (300 volts max.)  
70 °C ..... 0.25 watt  
125 °C ..... 0 watt  
Temperature Range ... -55 °C to +125 °C  
Temperature Coefficient ...  $\pm 100$  ppm/°C  
Humidity ..... 90-98 % RH,  
10 cycles, 240 hours  
TRRS  $\pm 2\%$ ; IRS 10 megohms  
Vibration ..... 20 G TRRS  $\pm 1\%$ ; VRS  $\pm 1\%$   
Shock ..... 100 G TRRS  $\pm 1\%$ ; VRS  $\pm 1\%$   
Load Life  
..... (@ 70 °C Rated Power 1000 Hours)  
TRRS  $\pm 3\%$   
Rotational Life ..... 100 cycles  
TRRS  $\pm 3\%$   
Thermal Shock ..... 5 cycles  
TRRS  $\pm 2\%$ ; VRS  $\pm 1\%$

### Physical Characteristics


Mechanical Angle .....  $240^\circ$  nom.  
Torque ..... 180 g-cm typical  
Stop Strength ..... 300 g-cm typical  
Pushover Strength (Z Style)  
..... 2 kilograms (4.4 lbs.) minimum  
Weight ..... Approximately 0.01 oz.  
Marking ..... Manufacturer's code,  
resistance code and date code  
Wiper ..... 50 % (Actual TR)  $\pm 10\%$   
Flammability ..... U.L. 94V-0  
Standard Packaging  
J, G and R ..... 500 pcs./7 " reel  
S and Z ..... 200 pcs./7 " reel  
H ..... 100 pcs./tube  
Adjustment Tool ..... H-90

### Product Dimensions


3314J-1

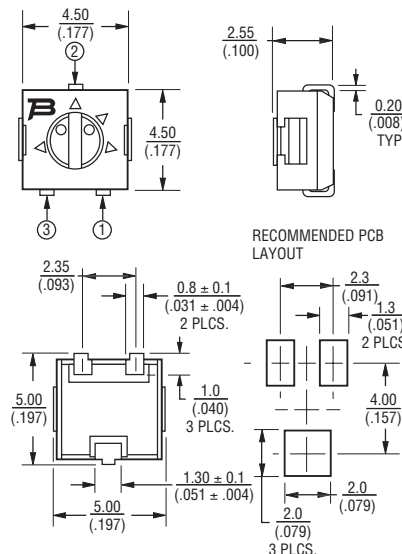


3314G-1

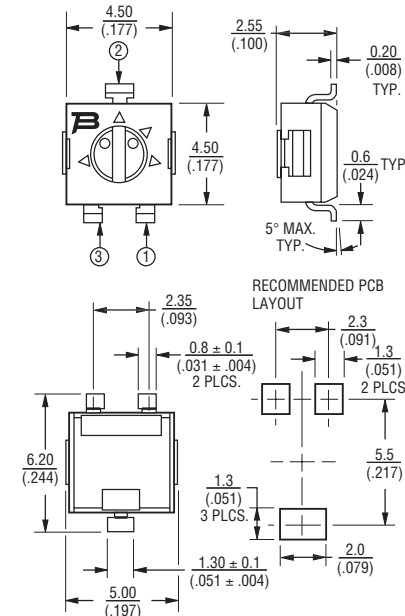


3314J-1, G-1, R-1, H-1  
(Bourns Marking,  
Straight Slot)




3314J-2, G-2, R-2, H-2  
(Bourns Marking,  
Cross Slot)



3314J-3, G-3, R-3, H-3  
(Reverse Marking,  
Straight Slot)



3314J-4, G-4, R-4, H-4  
(Reverse Marking,  
Cross Slot)



### How To Order

Model **3314 J - 1 - 502 E**  
Style  
Standard or Modified Product Indicator (Styles J, G, R, H & S)  
-1 = Single Slot  
-2 = Cross Slot  
-3 = Single Slot w/Reverse Marking  
-4 = Cross Slot w/Reverse Marking  
Product Indicator (Style Z only)  
-GA4 = Single Slot  
-1 = Cross Slot  
-3 = Single Slot w/Reverse Marking  
-4 = Cross Slot w/Reverse Marking  
Resistance Code  
Embossed Tape Designator\*\*  
E = Styles J, G and R: 500 pcs./7 " reel  
Styles S and Z: 200 pcs./7 " reel  
G = Styles J and G: 3000 pcs./13 " reel  
Style R: 2500 pcs./13 " reel  
Styles S and Z: 1000 pcs./13 " reel  
\*\*Style H is available in tube packaging only.

### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| <b>100</b>        | <b>101</b>      |
| <b>200</b>        | <b>201</b>      |
| <b>500</b>        | <b>501</b>      |
| <b>1,000</b>      | <b>102</b>      |
| <b>2,000</b>      | <b>202</b>      |
| <b>5,000</b>      | <b>502</b>      |
| <b>10,000</b>     | <b>103</b>      |
| <b>20,000</b>     | <b>203</b>      |
| <b>50,000</b>     | <b>503</b>      |
| <b>100,000</b>    | <b>104</b>      |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular distribution values listed in boldface.  
Special resistances available.



\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.  
Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# 3314 - 4 mm Square Trimpot® Trimming Potentiometer



**BOURNS®**

## Product Dimensions

3314R-1

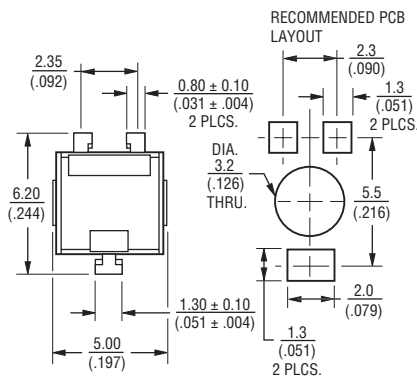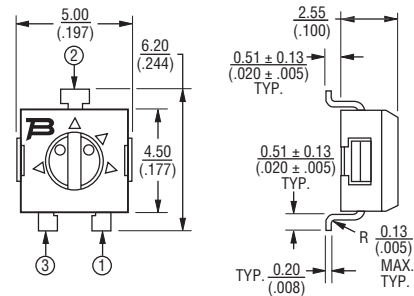


3314H-1

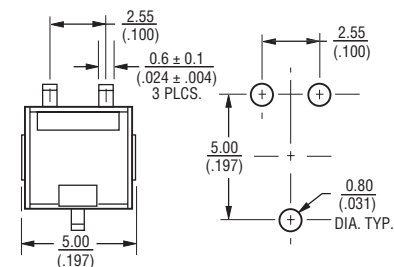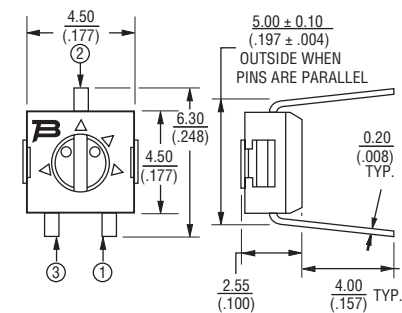


## Packaging Specifications - J, G and R Styles

(J, G Styles)

TAPE

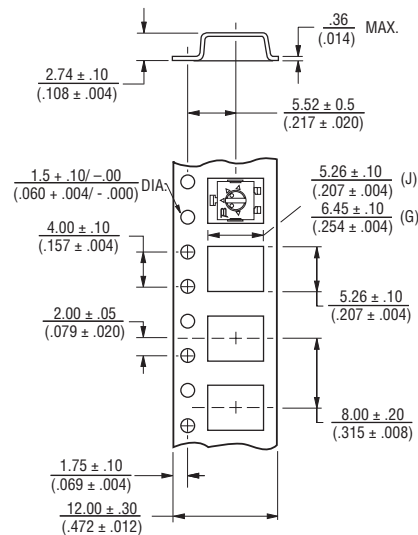


REEL

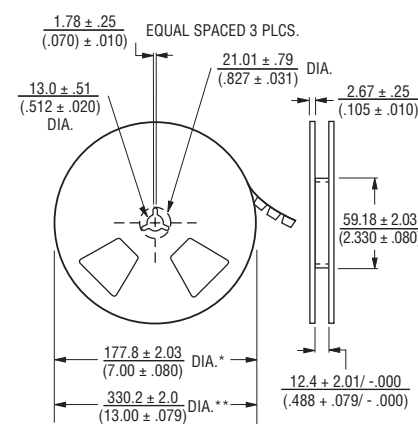


\* Embossed Tape Designator "E"  
\*\* Embossed Tape Designator "G"  
(See How To Order chart for further information.)

Meets EIA specification 481.




(R Style)

TAPE

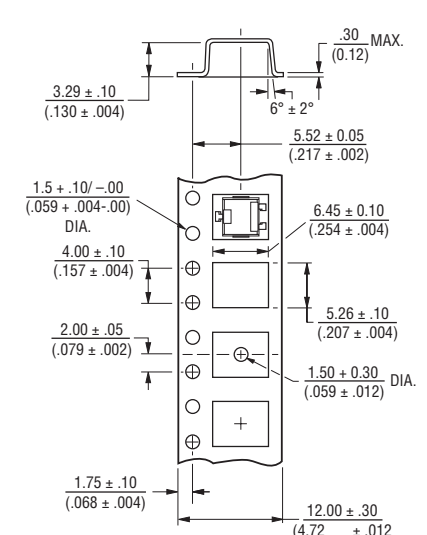

REEL

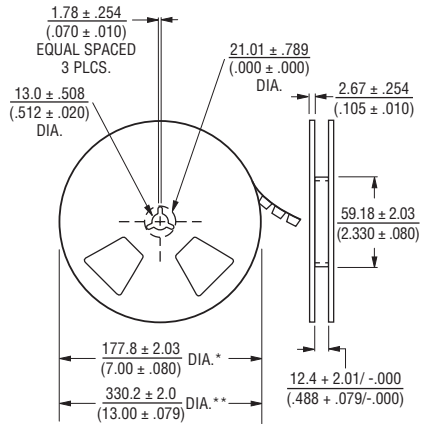

\* Embossed Tape Designator "E"  
\*\* Embossed Tape Designator "G"  
(See How To Order chart for further information.)

Meets EIA specification 481.

| DIMENSIONS:   | MM<br>(INCHES)     |
|---------------|--------------------|
| TOLERANCES: ± | 0.25<br>(.010)     |
|               | EXCEPT WHERE NOTED |

# 3314 - 4 mm Square Trimpot® Trimming Potentiometer

**BOURNS®**

## Product Dimensions


### 3314S-1 (Bourns Marking, Straight Slot)



### 3314S-2 (Bourns Marking, Cross Slot)




### 3314S-3 (Reverse Marking, Straight Slot)




### 3314S-4 (Reverse Marking, Cross Slot)



### 3314S Common Dimensions

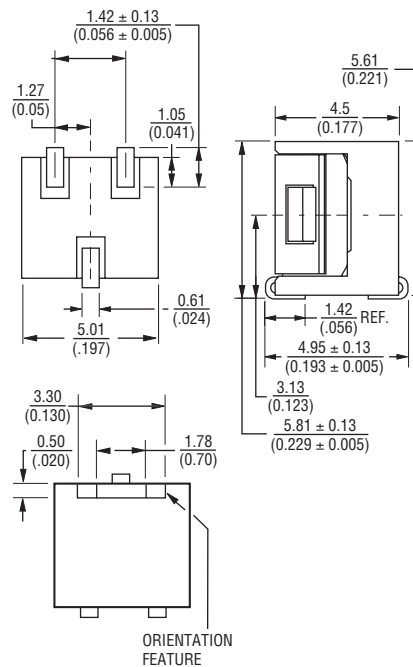

### RECOMMENDED PCB LAYOUT

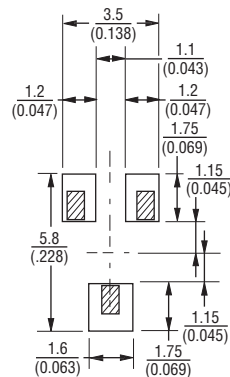


DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

TOLERANCES: ±  $\frac{0.30}{(.012)}$  EXCEPT WHERE NOTED


## Packaging Specifications

### (S Style)

#### TAPE

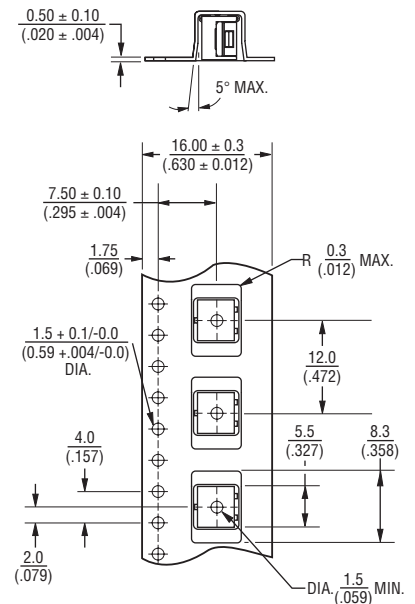

#### REEL

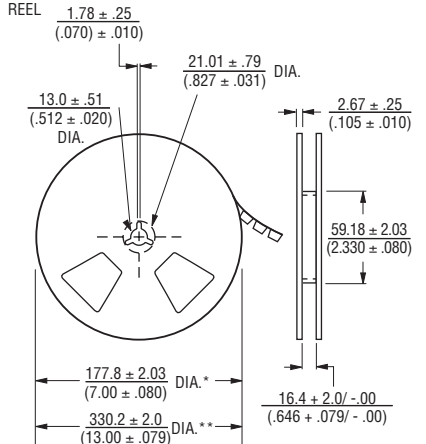

\* Embossed Tape Designator "E"

\*\* Embossed Tape Designator "G"  
(See How To Order chart for further information.)

Meets EIA specification 481.

# 3314 - 4 mm Square Trimpot® Trimming Potentiometer

**BOURNS®**

## Product Dimensions

### 3314Z-1-(RC) E (Cross Slot)



### 3314Z-GA4-(RC) E (Straight Slot)



### 3314Z-3 (Reverse Marking, Straight Slot)



### 3314Z-4-(RC) E (Reverse Marking, Cross Slot)



## 3314Z Common Dimensions




## RECOMMENDED PCB LAYOUT



## Packaging Specifications

### (Z Style)

### TAPE

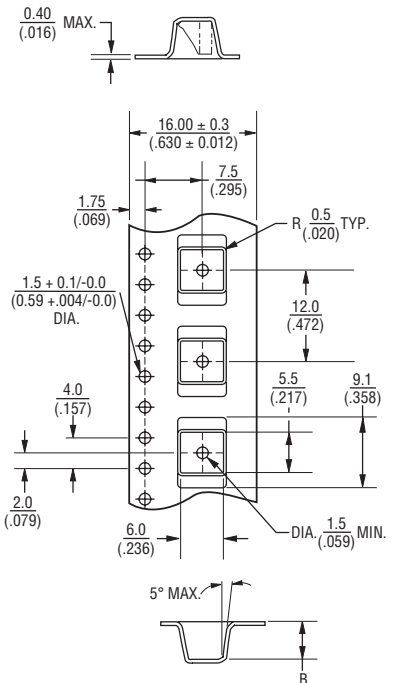

\* Embossed Tape Designator "E"  
\*\* Embossed Tape Designator "G"  
(See How To Order chart for further information.)

Meets EIA specification 481.

REV. 01/12

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331